


Machine Id  
**324**  
Component  
**Unknown Component**  
Fluid  
**NOT GIVEN (--- GAL)**

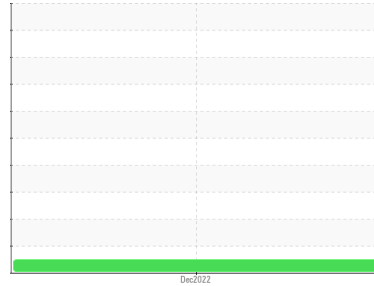

**DIAGNOSIS**

**Recommendation**  
Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please provide more complete information on your next sample. Please specify the component make and model with your next sample.

**Wear**  
All component wear rates are normal.

**Contamination**  
The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

**Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info	<b>PC0069763</b>	---	---
Sample Date	Client Info	<b>09 Dec 2022</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

**WEAR METALS** method limit/base current history1 history2

PQ	ASTM D8184*	<b>0</b>	---	---
Iron	ppm ASTM D5185(m)	<b>0</b>	---	---
Chromium	ppm ASTM D5185(m)	<b>0</b>	---	---
Nickel	ppm ASTM D5185(m)	<b>0</b>	---	---
Titanium	ppm ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm ASTM D5185(m)	<b>0</b>	---	---
Lead	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185(m)	<b>0</b>	---	---
Tin	ppm ASTM D5185(m)	<b>0</b>	---	---
Antimony	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---
Vanadium	ppm ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm ASTM D5185(m)	<b>0</b>	---	---

**ADDITIVES** method limit/base current history1 history2

Boron	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---
Barium	ppm ASTM D5185(m)	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185(m)	<b>0</b>	---	---
Manganese	ppm ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm ASTM D5185(m)	<b>0</b>	---	---
Calcium	ppm ASTM D5185(m)	<b>51</b>	---	---
Phosphorus	ppm ASTM D5185(m)	<b>348</b>	---	---
Zinc	ppm ASTM D5185(m)	<b>408</b>	---	---
Sulfur	ppm ASTM D5185(m)	<b>747</b>	---	---
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---






**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm ASTM D5185(m)	<b>0</b>	---	---
Sodium	ppm ASTM D5185(m)	<b>0</b>	---	---
Potassium	ppm ASTM D5185(m) >20	<b>0</b>	---	---

**FLUID CLEANLINESS** method limit/base current history1 history2

Particles >4µm	ASTM D7647 >5000	<b>391</b>	---	---
Particles >6µm	ASTM D7647 >1300	<b>72</b>	---	---
Particles >14µm	ASTM D7647 >160	<b>3</b>	---	---
Particles >21µm	ASTM D7647 >40	<b>2</b>	---	---
Particles >38µm	ASTM D7647 >10	<b>0</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>16/13/9</b>	---	---

# OIL ANALYSIS REPORT

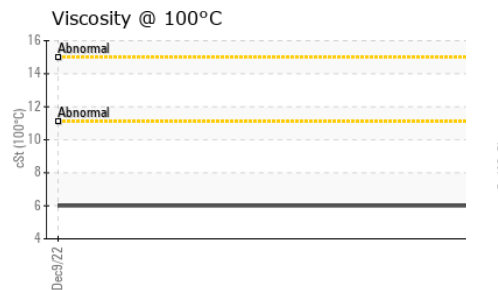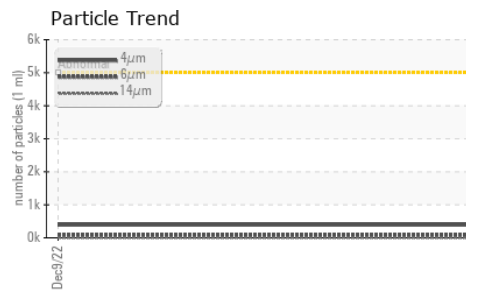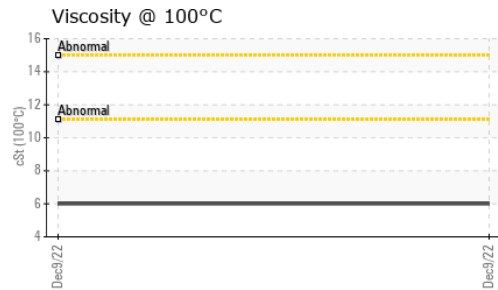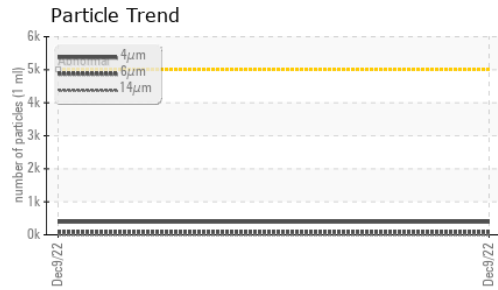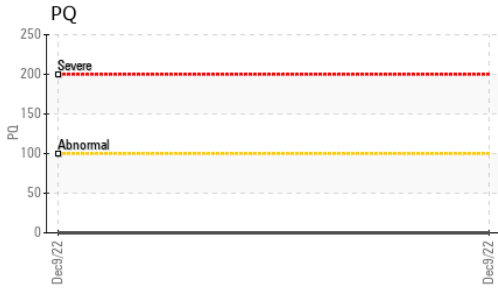




FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>0.44</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*		<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		<b>48.2</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		<b>6</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		<b>49</b>	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				no image	no image	
Bottom				no image	no image	

## GRAPHS

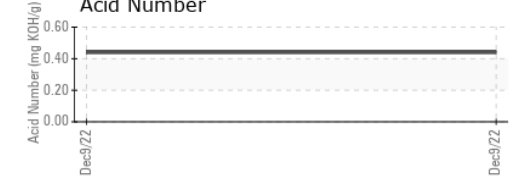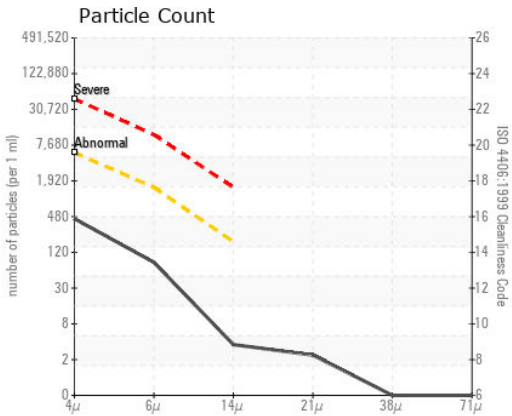

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0069763 **Received** : 14 Dec 2022  
**Lab Number** : **02528671** **Diagnosed** : 16 Dec 2022  
**Unique Number** : 5501669 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: KV100, PRTCOUNT, TAN Man, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**PETRONOR INC**  
 2920 RTE 111 EST  
 AMOS, QC  
 CA J9T 3A1  
 Contact: Gaston  
 entretien@petronor.ca  
 T: (819)732-5334  
 F: