

Machine Id
CAL009

Component
Diesel Engine

Fluid
MOBIL DELVAC 1300 SUPER15W40 (100 LTR)

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0023787	PC0052807	---
Sample Date	Client Info			30 Nov 2022	18 May 2022	---
Machine Age	hrs	Client Info		18	17	---
Oil Age	hrs	Client Info		18	17	---
Oil Changed	Client Info			N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	4	4	---
Chromium	ppm	ASTM D5185(m)	>20	0	0	---
Nickel	ppm	ASTM D5185(m)	>2	<1	0	---
Titanium	ppm	ASTM D5185(m)	>2	<1	<1	---
Silver	ppm	ASTM D5185(m)	>2	0	<1	---
Aluminum	ppm	ASTM D5185(m)	>20	2	1	---
Lead	ppm	ASTM D5185(m)	>40	<1	1	---
Copper	ppm	ASTM D5185(m)	>330	14	13	---
Tin	ppm	ASTM D5185(m)	>15	0	0	---
Antimony	ppm	ASTM D5185(m)		<1	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	78	70	---
Barium	ppm	ASTM D5185(m)	0	<1	<1	---
Molybdenum	ppm	ASTM D5185(m)	0	44	42	---
Manganese	ppm	ASTM D5185(m)		19	17	---
Magnesium	ppm	ASTM D5185(m)	0	782	737	---
Calcium	ppm	ASTM D5185(m)		1511	1383	---
Phosphorus	ppm	ASTM D5185(m)		1164	1013	---
Zinc	ppm	ASTM D5185(m)		1242	1167	---
Sulfur	ppm	ASTM D5185(m)		4684	4289	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	37	34	---
Sodium	ppm	ASTM D5185(m)		2	2	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0	0	---
Nitration	Abs/cm	ASTM D7624*	>20	4.5	4.3	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	16.0	14.9	---

OIL ANALYSIS REPORT

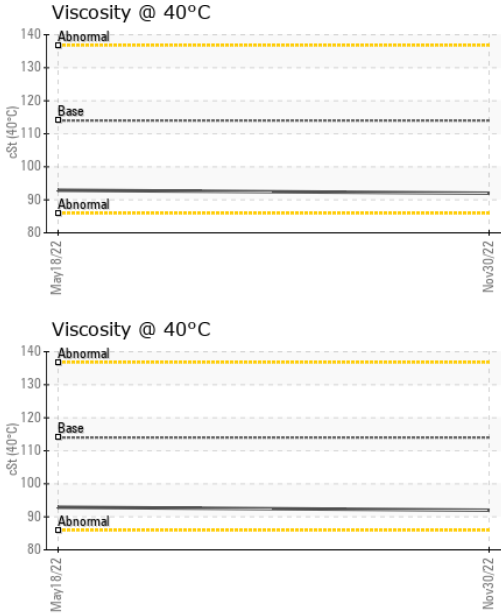


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	10.0	9.5	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	114	92.0	92.9	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	12.8	12.8	---
Viscosity Index (VI)	Scale	ASTM D2270*	137	136	134	---

GRAPHS

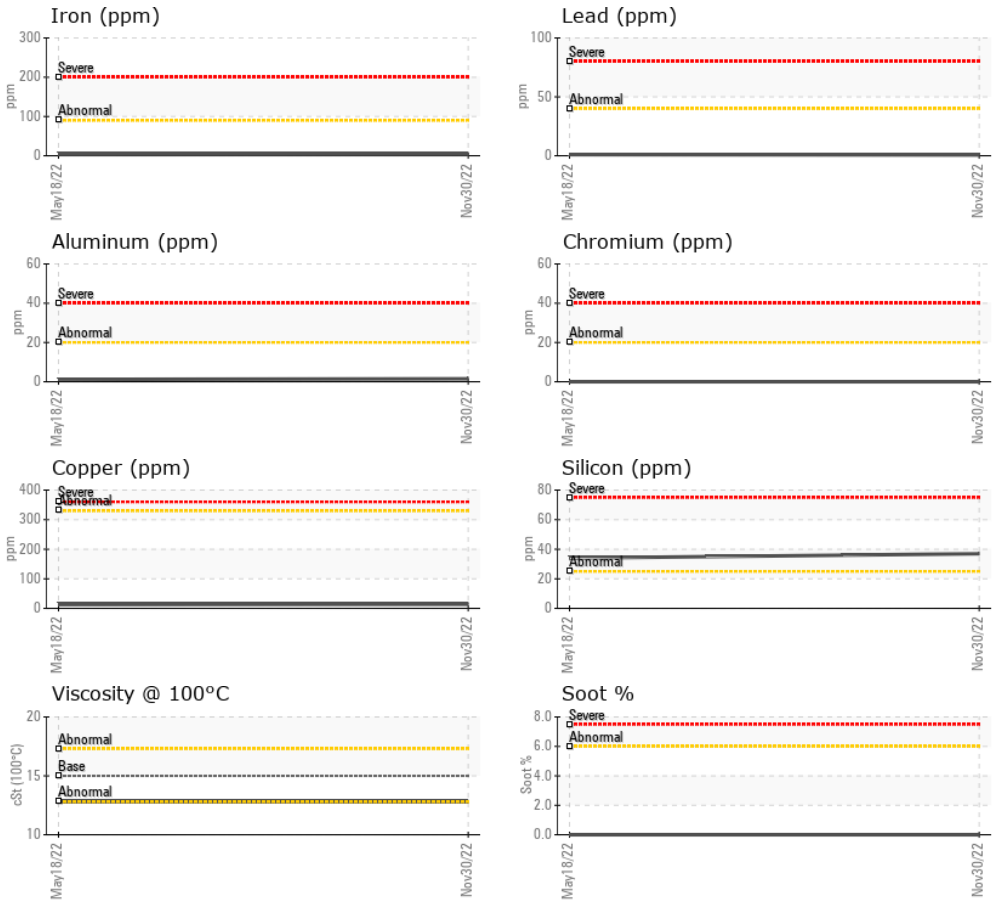

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **Ocean Choice International - MV Calvert**
Sample No. : PC0023787 **Received** : 10 Jan 2023 1315 Topsail Rd, P.O. Box 8190
Lab Number : **02532221** **Diagnosed** : 10 Jan 2023 St. John's, NL
Unique Number : 5513220 **Diagnostician** : Kevin Marson CA A1B 3N4
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Calvert Engine Control Room
 calvertengine@oceanchoice.com
 T:
 F: