


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

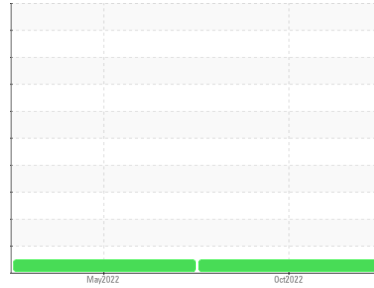

Machine Id
CAL007

Component
Diesel Engine

Fluid
MOBIL DELVAC MX 15W40 (460 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. No other corrective action is recommended at this time. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid. this testkit includes BN to determine the suitability of the oil for continued use.

Wear

Component wear rates appear to be normal (unconfirmed).

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service (unconfirmed). The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0011794	PC0052801	---
Sample Date	Client Info			09 Oct 2022	15 May 2022	---
Machine Age	hrs	Client Info		4154	3275	---
Oil Age	hrs	Client Info		4154	250	---
Oil Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---





WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>65	2	3	---
Chromium	ppm	ASTM D5185(m)	>3	0	0	---
Nickel	ppm	ASTM D5185(m)	>2	0	<1	---
Titanium	ppm	ASTM D5185(m)	>2	<1	<1	---
Silver	ppm	ASTM D5185(m)	>2	0	0	---
Aluminum	ppm	ASTM D5185(m)	>6	1	<1	---
Lead	ppm	ASTM D5185(m)	>13	<1	3	---
Copper	ppm	ASTM D5185(m)	>65	<1	<1	---
Tin	ppm	ASTM D5185(m)	>2	0	0	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		50	40	---
Barium	ppm	ASTM D5185(m)		0	0	---
Molybdenum	ppm	ASTM D5185(m)		42	41	---
Manganese	ppm	ASTM D5185(m)		<1	<1	---
Magnesium	ppm	ASTM D5185(m)		579	638	---
Calcium	ppm	ASTM D5185(m)		1686	1535	---
Phosphorus	ppm	ASTM D5185(m)		863	814	---
Zinc	ppm	ASTM D5185(m)		925	979	---
Sulfur	ppm	ASTM D5185(m)		2343	2394	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	5	4	---
Sodium	ppm	ASTM D5185(m)		2	2	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---
Fuel	%	ASTM D7593*	>5	1.2	<1.0	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0	0	---
Nitration	Abs/cm	ASTM D7624*	>20	6.2	7.2	---
Sulfation	Abs./1mm	ASTM D7415*	>30	22.7	21.2	---

OIL ANALYSIS REPORT





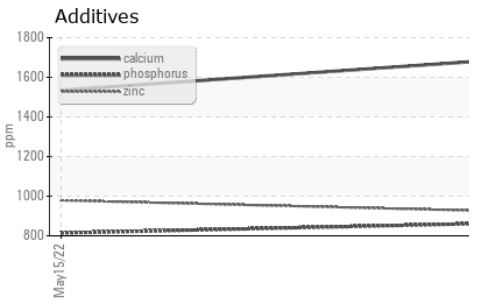
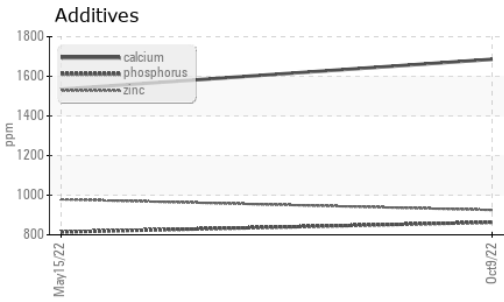
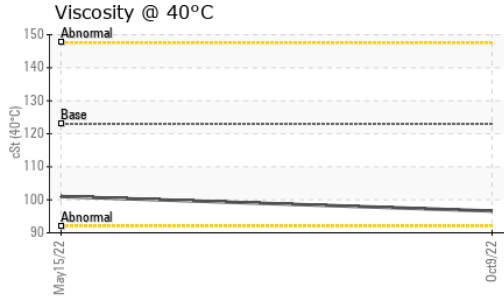
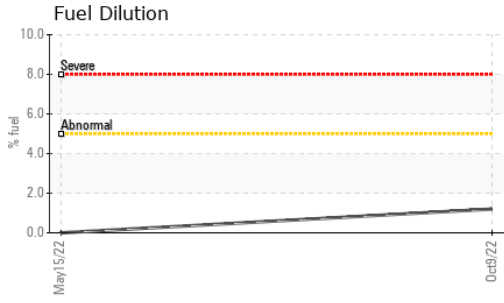


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	19.5	18.4	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	123	96.6	101	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	13.0	13.4	---
Viscosity Index (VI)	Scale	ASTM D2270*	133	131	131	---

GRAPHS

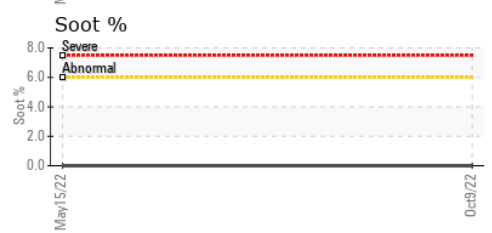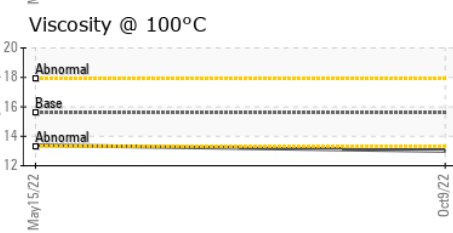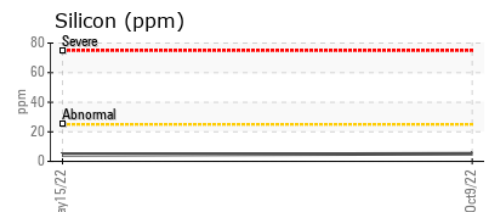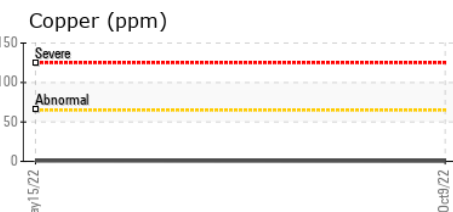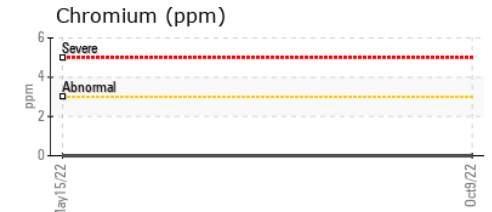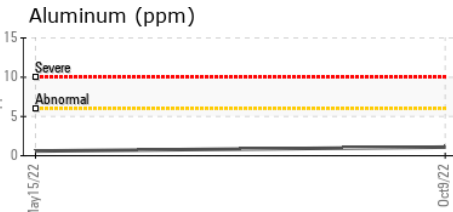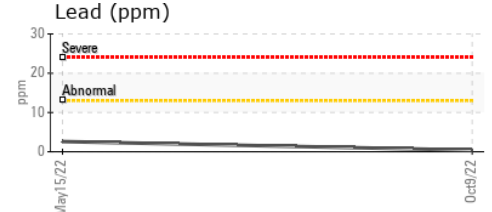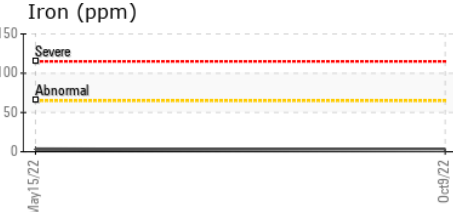

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **Ocean Choice International - MV Calvert**
Sample No. : PC0011794 **Received** : 10 Jan 2023 1315 Topsail Rd, P.O. Box 8190
Lab Number : **02532224** **Diagnosed** : 11 Jan 2023 St. John's, NL
Unique Number : 5513223 **Diagnostician** : Kevin Marson CA A1B 3N4
Test Package : MOB 1 (Additional Tests: FuelDilution, KV40, PercentFuel, Viscosity, Visual) Calvert Engine Control Room
calvertengine@oceanchoice.com

To discuss this sample report, contact Customer Service at 1-800-268-2131. T:
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. F:
 Validity of results and interpretation are based on the sample and information as supplied.