


Machine Id
NEW HOLLAND 240FXP 73386628
Component
Front Diesel Engine
Fluid
PETRO CANADA DURON HP 15W40 (17 LTR)

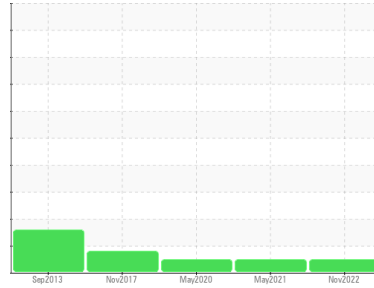

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0040983	PC363776	PC363780
Sample Date	Client Info	14 Nov 2022	04 May 2021	08 May 2020
Machine Age	hrs	1913	1587	1454
Oil Age	hrs	155	133	120
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >90	11	10	9
Chromium	ppm ASTM D5185(m) >20	<1	<1	<1
Nickel	ppm ASTM D5185(m) >2	<1	0	<1
Titanium	ppm ASTM D5185(m) >2	<1	0	0
Silver	ppm ASTM D5185(m) >2	0	0	0
Aluminum	ppm ASTM D5185(m) >20	1	1	1
Lead	ppm ASTM D5185(m) >40	2	<1	<1
Copper	ppm ASTM D5185(m) >330	2	2	3
Tin	ppm ASTM D5185(m) >15	0	<1	0
Antimony	ppm ASTM D5185(m)	<1	<1	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	2	2	2
Barium	ppm ASTM D5185(m) 0	0	0	0
Molybdenum	ppm ASTM D5185(m) 60	59	56	20
Manganese	ppm ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm ASTM D5185(m) 1010	991	963	324
Calcium	ppm ASTM D5185(m) 1070	1135	1214	1907
Phosphorus	ppm ASTM D5185(m) 1150	1099	1098	998
Zinc	ppm ASTM D5185(m) 1270	1224	1273	1177
Sulfur	ppm ASTM D5185(m) 2060	2626	2750	3062
Lithium	ppm ASTM D5185(m)	<1	<1	<1




CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	2	3	2
Sodium	ppm ASTM D5185(m)	2	2	<1
Potassium	ppm ASTM D5185(m) >20	0	<1	1

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >6	0.1	0	0.2
Nitration	Abs/cm ASTM D7624* >20	8.0	7.4	6.7
Sulfation	Abs/.1mm ASTM D7415* >30	21.4	19.9	19.1

OIL ANALYSIS REPORT






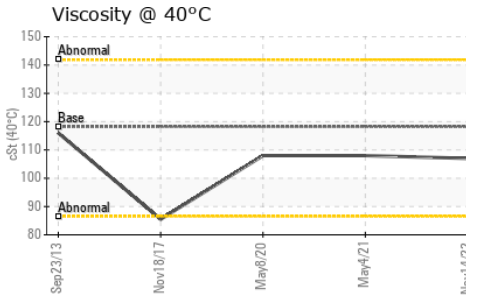
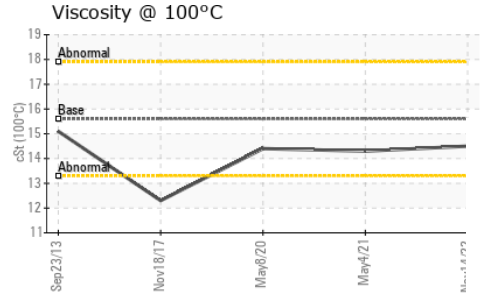
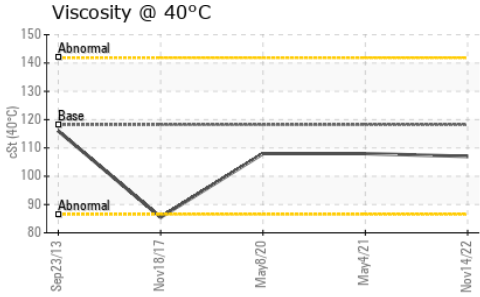


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	16.7	16.0	15.2
Base Number (BN)	mg KOH/g	ASTM D2896*	9.8	8.83	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	107	108	108
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	14.5	14.3	14.4
Viscosity Index (VI)	Scale	ASTM D2270*	139	139	134	136

GRAPHS

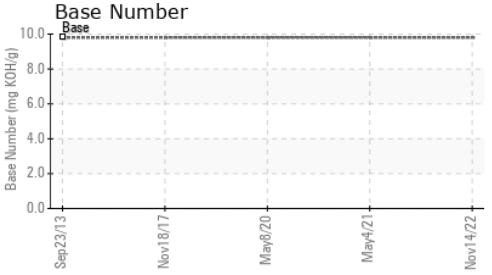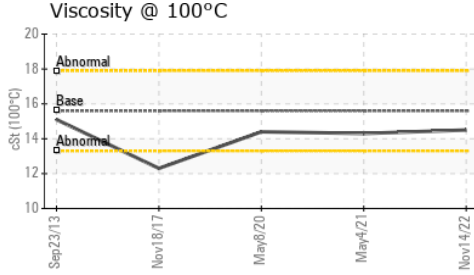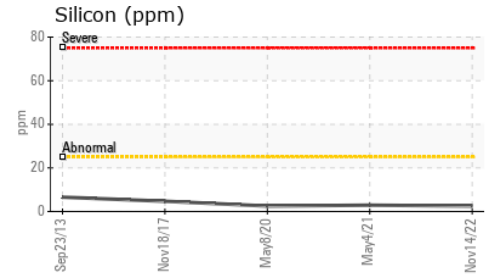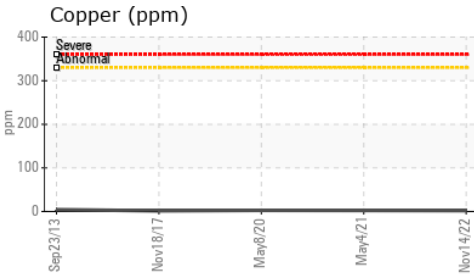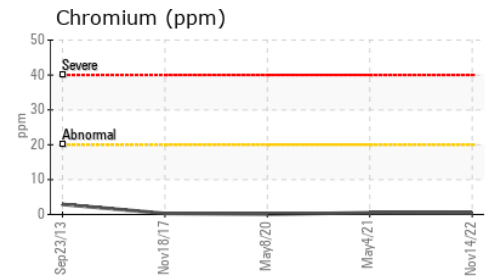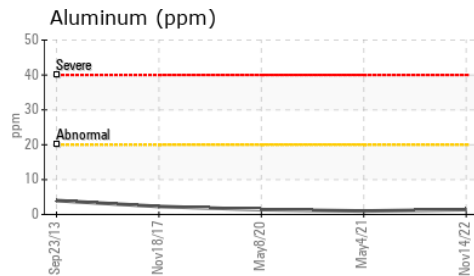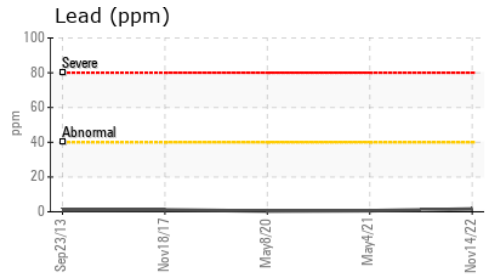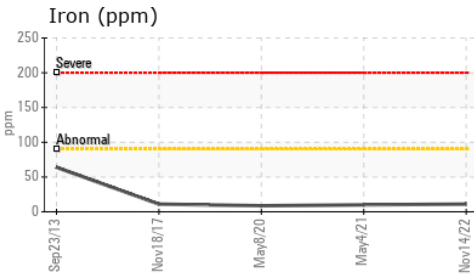

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0040983
Lab Number : **02533038**
Unique Number : 5514037
Test Package : MOB 2 (Additional Tests: KV40, VI)

Received : 13 Jan 2023
Tested : 17 Jan 2023
Diagnosed : 17 Jan 2023 - Wes Davis

KYLE KORNEYCHUK
 BOX 181
 PELLY, SK
 CA S0A 2Z0
 Contact: Kyle Korneychuk
 kylekorneychuk1@sasktel.net
 T: (306)781-2375
 F: (306)595-4545

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.