

Machine Id
ECO DIESEL 1500

Component
Diesel Engine

Fluid
PETRO CANADA DURON UHP 5W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info	PC0040987	---	---
Sample Date	Client Info	22 Jun 2022	---	---
Machine Age	kms Client Info	168519	---	---
Oil Age	kms Client Info	10416	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		NORMAL	---	---

CONTAMINATION method limit/base current history1 history2

Fuel	WC Method	>5	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185(m)	>100	17	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)	>3	3	---	---
Aluminum	ppm	ASTM D5185(m)	>20	8	---	---
Lead	ppm	ASTM D5185(m)	>40	<1	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185(m)	65	52	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	65	59	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	1160	1119	---	---
Calcium	ppm	ASTM D5185(m)	820	867	---	---
Phosphorus	ppm	ASTM D5185(m)	1160	1125	---	---
Zinc	ppm	ASTM D5185(m)	1260	1254	---	---
Sulfur	ppm	ASTM D5185(m)	3000	2890	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---




CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185(m)	>25	9	---	---
Sodium	ppm	ASTM D5185(m)		3	---	---
Potassium	ppm	ASTM D5185(m)	>20	16	---	---

INFRA-RED method limit/base current history1 history2

Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	13.6	---	---
Sulfation	Abs./1mm	ASTM D7415*	>30	23.0	---	---

OIL ANALYSIS REPORT






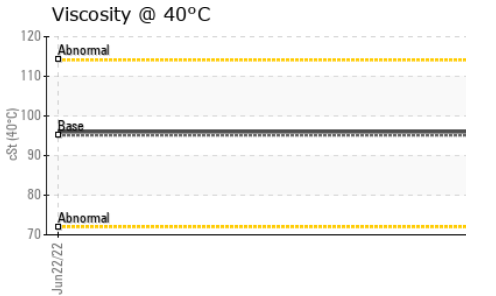
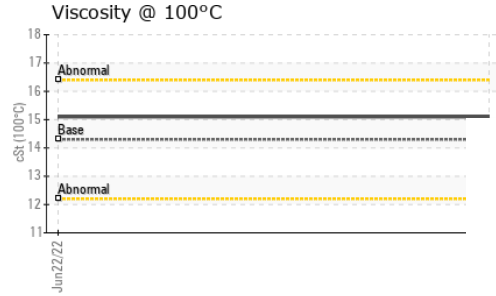
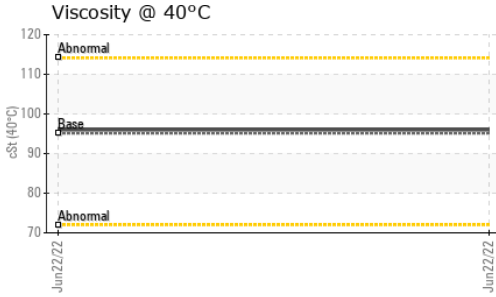


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	25.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*	11.0	8.38	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	95.1	96.0	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.3	15.1	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	169	165	---	---

GRAPHS

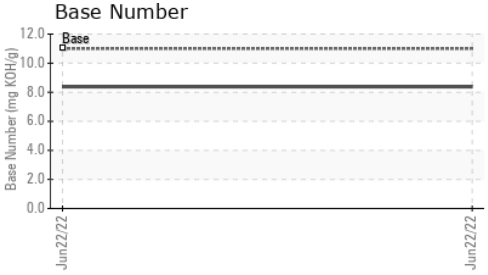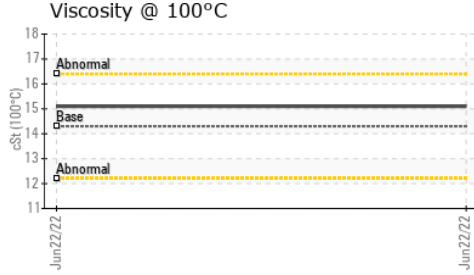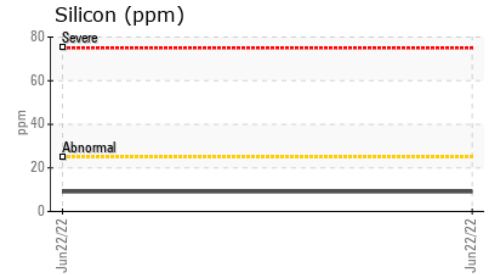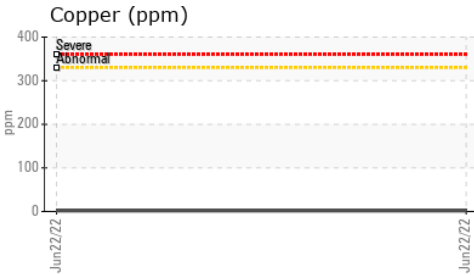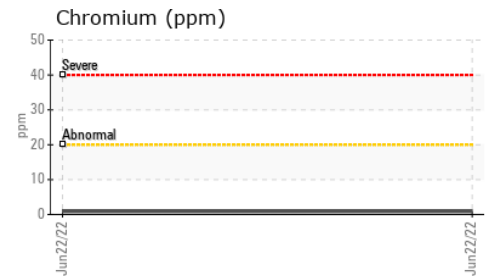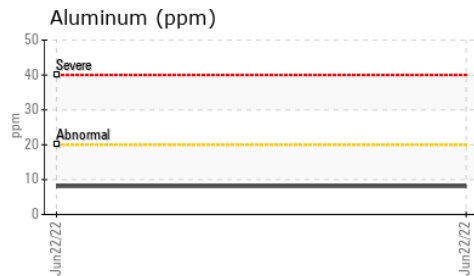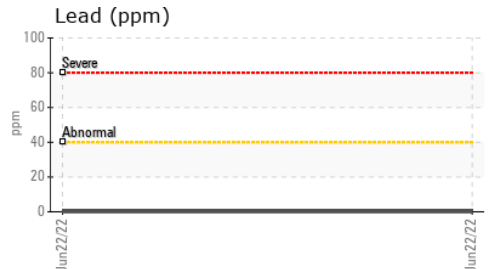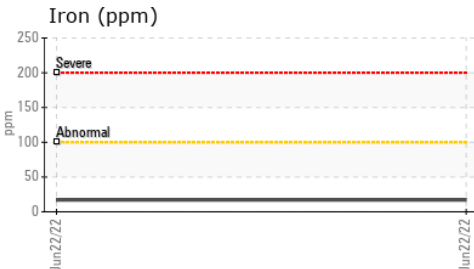

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0040987 **Received** : 13 Jan 2023
Lab Number : **02533039** **Diagnosed** : 17 Jan 2023
Unique Number : 5514038 **Diagnostician** : Bill Quesnel
Test Package : MOB 2 (Additional Tests: KV40, VI)

KYLE KORNEYCHUK
 BOX 181
 PELLY, SK
 CA S0A 2Z0
 Contact: Kyle Korneychuk
 kylekorneychuk1@sasktel.net
 T: (306)781-2375
 F: (306)595-4545

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.