


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

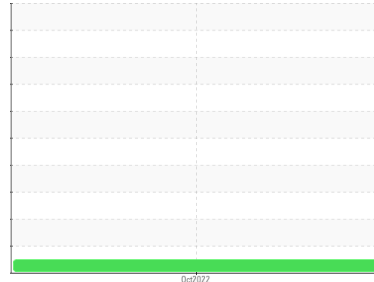

Machine Id
D6R XL
Component
Rear Transmission
Fluid
NOT GIVEN (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0040982	---	---
Sample Date	Client Info			31 Oct 2022	---	---
Machine Age	hrs	Client Info		10743	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				NORMAL	---	---




WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m)	>200	37	---	---
Chromium	ppm	ASTM D5185(m)	>10	<1	---	---
Nickel	ppm	ASTM D5185(m)		0	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	2	---	---
Lead	ppm	ASTM D5185(m)	>50	6	---	---
Copper	ppm	ASTM D5185(m)	>200	186	---	---
Tin	ppm	ASTM D5185(m)	>10	<1	---	---
Antimony	ppm	ASTM D5185(m)		1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		48	---	---
Barium	ppm	ASTM D5185(m)		2	---	---
Molybdenum	ppm	ASTM D5185(m)		<1	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		12	---	---
Calcium	ppm	ASTM D5185(m)		2509	---	---
Phosphorus	ppm	ASTM D5185(m)		1175	---	---
Zinc	ppm	ASTM D5185(m)		906	---	---
Sulfur	ppm	ASTM D5185(m)		7907	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	21	---	---
Sodium	ppm	ASTM D5185(m)		5	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		1.54	---	---


OIL ANALYSIS REPORT

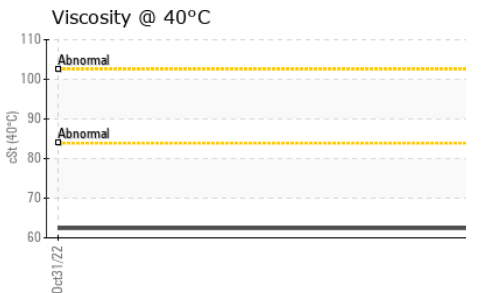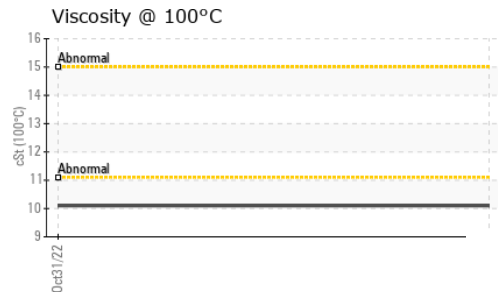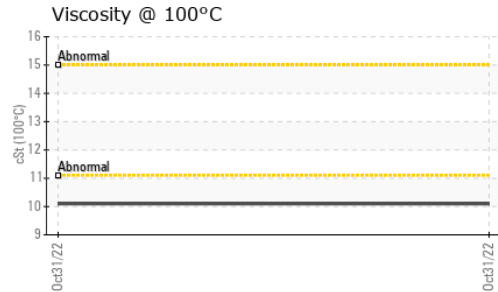

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	62.4	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.1	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	148	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

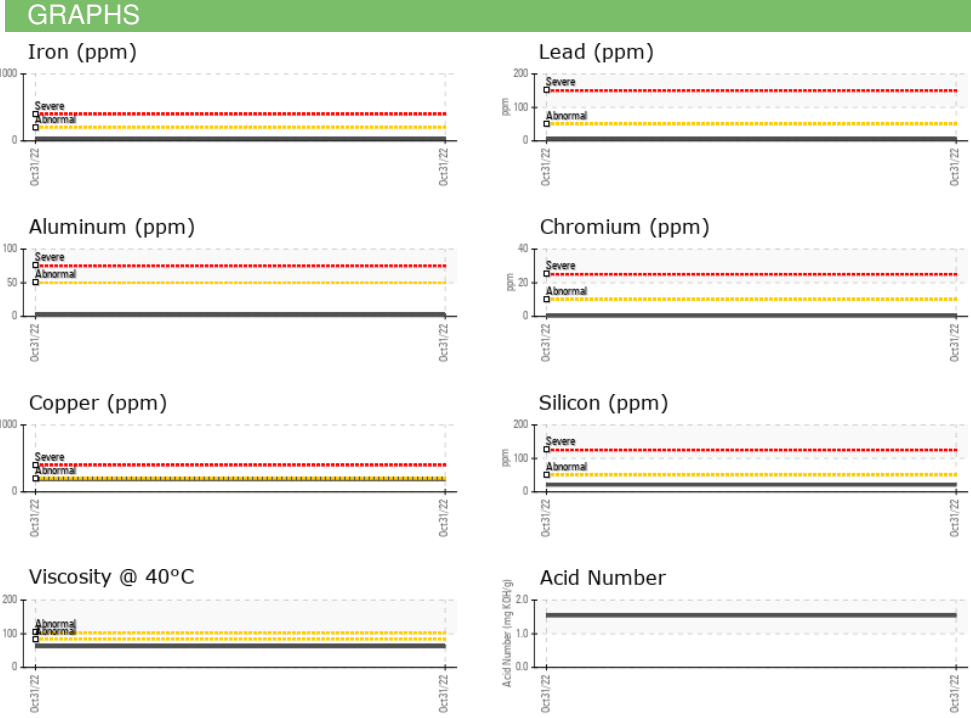

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0040982
Lab Number : 02533110
Unique Number : 5514109
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

KYLE KORNEYCHUK
 BOX 181
 PELLY, SK
 CA S0A 2Z0
 Contact: Kyle Korneychuk
 kylekorneychuk1@sasktel.net
 T: (306)781-2375
 F: (306)595-4545

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.