



Machine Id
STEERING GEAR

Component
Steering
Fluid

AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 68. Please confirm. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info	PC	---	---
Sample Date	Client Info	07 Feb 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185(m)	>60	25	---	---
Chromium	ppm	ASTM D5185(m)	>12	0	---	---
Nickel	ppm	ASTM D5185(m)	>6	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>4	0	---	---
Lead	ppm	ASTM D5185(m)	>12	<1	---	---
Copper	ppm	ASTM D5185(m)	>30	1	---	---
Tin	ppm	ASTM D5185(m)		0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185(m)	5	<1	---	---
Barium	ppm	ASTM D5185(m)	5	0	---	---
Molybdenum	ppm	ASTM D5185(m)	5	0	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	25	4	---	---
Calcium	ppm	ASTM D5185(m)	200	49	---	---
Phosphorus	ppm	ASTM D5185(m)	300	318	---	---
Zinc	ppm	ASTM D5185(m)	370	344	---	---
Sulfur	ppm	ASTM D5185(m)	2500	2476	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---



CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185(m)	>10	3	---	---
Sodium	ppm	ASTM D5185(m)		<1	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---

VISUAL method limit/base current history1 history2

White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*		NEG	---	---
Free Water	scalar	Visual*		NEG	---	---









OIL ANALYSIS REPORT

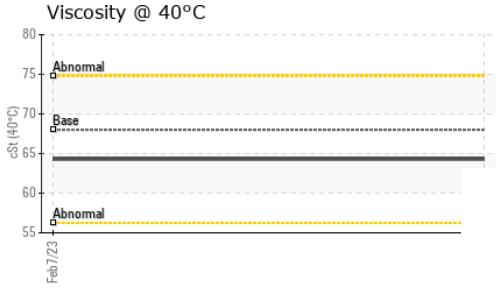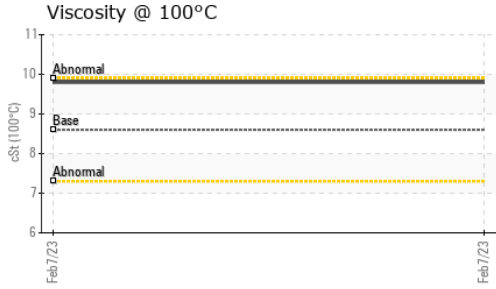

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68	64.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	8.6	9.8	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	96	135	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

GRAPHS

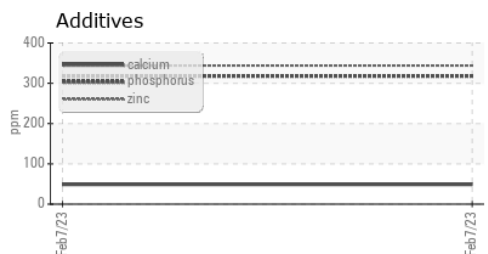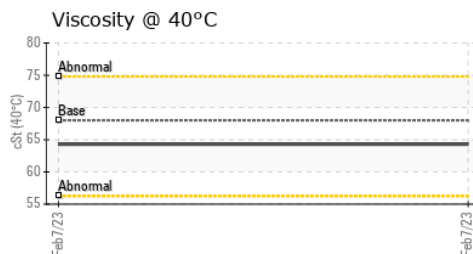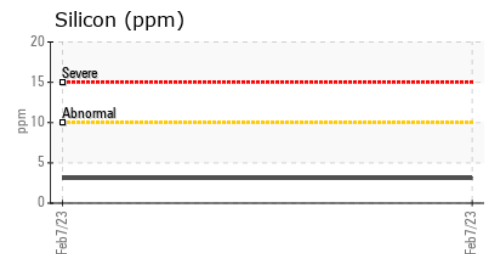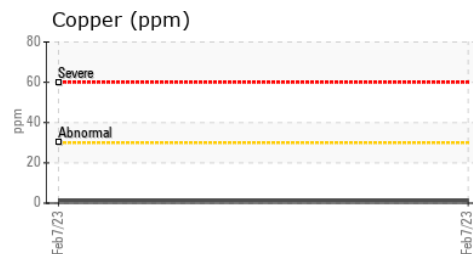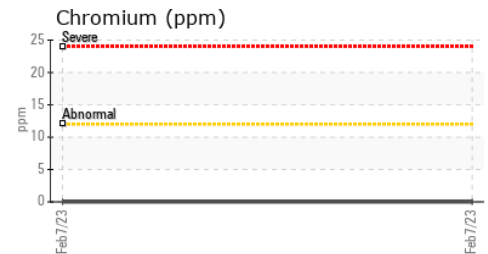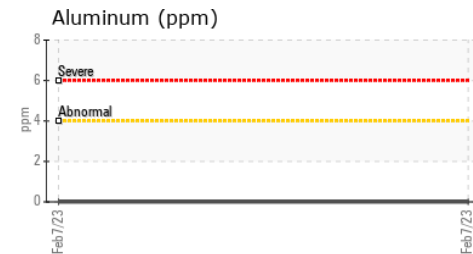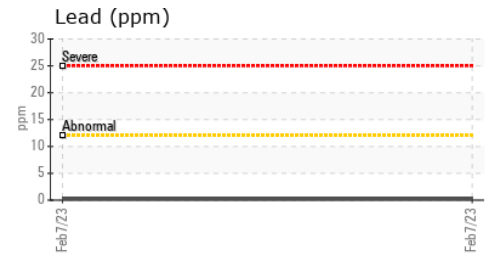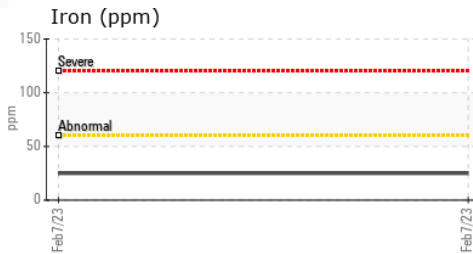

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Ocean Choice International - Katsheshuk II
Sample No. : PC **Received** : 08 Feb 2023
Lab Number : 02538220 **Diagnosed** : 08 Feb 2023
Unique Number : 5527220 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

1315 Topsail Rd, P.O. Box 8190
 St. John's, NL
 CA A1B 3N4
 Contact: Chief Engineer
 katengine@oceanchoice.com