

## **OIL ANALYSIS REPORT**

## Area [450113845] Machine Id Gearbox Fire Water Pump A (S/N Sample Tag CG-71001A) Gearbox Fluid

NOT GIVEN (--- LTR)

### DIAGNOSIS

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Feb2023	

Sample Rating Trend





NORMAL

SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC		
Sample Date		Client Info		26 Feb 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METAL	S	method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>150	4		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>5	0		
Lead	ppm	ASTM D5185(m)	>65	1		
Copper	ppm	ASTM D5185(m)	>80	<1		
Tin	ppm	ASTM D5185(m)	>8	<1		
Antimony	ppm	ASTM D5185(m)	>5	<1		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		7		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		0		
Phosphorus	ppm	ASTM D5185(m)		45		
Zinc	ppm	ASTM D5185(m)		3		
Sulfur	ppm	ASTM D5185(m)		1827		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID DEGRAD	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.28		



# **OIL ANALYSIS REPORT**



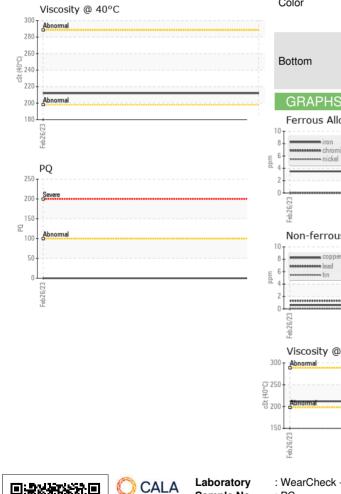

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.2	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		212		
Visc @ 100°C	cSt	ASTM D7279(m)		18.5		
Viscosity Index (VI)	Scale	ASTM D2270*		96		
SAMPLE IMAG			limit/base			
SAMPLE IMAG	ES	method	iimi/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image
GRAPHS			_			
Ferrous Alloys				PQ		
8			22	Severa		
6 - nickel			200	T		
4			180	0		
2			160	0 +		
8/23			E 14	0		
Feb 26/23			P0 Feb26/23			
Non-ferrous Metals	5		10	0 - Abnormal		-
<sup>0</sup> T			80	0		
8- copper			60	0 -		
6 <b>-</b>			4	0		
2			2	D -		
23 23						
Feb 26/23			Feb 26/2.	Feb 26/23		Feb 26/23
⊥ Viscosity @ 40°C			LL.			Fel
VISCOSICY @ 40°C				Acid Number		
			HOX 0.24	4		
0			E 0.1	8		
0 - Abnormal				2		
0			40.0.3 40.0 40.0 40.0 40.0 40.0 40.0 40.	ůl		
Feb26/23			Feb26/23 -	Feb26/23 -		Feb 26/23 -
Feb.			Feb2	Feb		Feb2
02545890	Received Diagnose Diagnost	d : 16 M ed : 17 M ician : Kev	Mar 2023 Mar 2023 in Marson	.7L 5H9	Suncor - Terra Scotia Centre, 2 Conta	

**Test Package** : MAR 2 (Additional Tests: KV100, TAN Man, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied. Scotia Centre, 235 Water Strret St. John`s, NL CA A1C 1B6 Contact: Josh Hynes joshynes@suncor.com T: (709)778-3575 F: (709)724-2835

ISO 17025:2017 Accredited Laboratory

Sample No.

Lab Number

**Unique Number** 

:

: