

OIL ANALYSIS REPORT

[450113847]

Gearbox Fire Water Pump B (S/N Sample Tag CG-71001B)

Gearbox

NOT GIVEN (--- LTR)

Sample Rating Trend



DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Feb 2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC		
Sample Date		Client Info		26 Feb 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METAL	.S	method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>150	5		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>5	<1		
Lead	ppm	ASTM D5185(m)	>65	0		
Copper	ppm	ASTM D5185(m)	>80	<1		
Tin	ppm	ASTM D5185(m)	>8	0		
Antimony	ppm	ASTM D5185(m)	>5	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		7		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		4		
Phosphorus	ppm	ASTM D5185(m)		45		
Zinc	ppm	ASTM D5185(m)		4		
Sulfur	ppm	ASTM D5185(m)		3772		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	ITS _	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	2		
Sodium	ppm	ASTM D5185(m)	-	- <1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID DEGRAI	DATIO <u>N</u>	method	limit/base	current	history1	history2
A		4 OTM D074*		0.40		


0.18

Acid Number (AN)

mg KOH/g ASTM D974*



OIL ANALYSIS REPORT

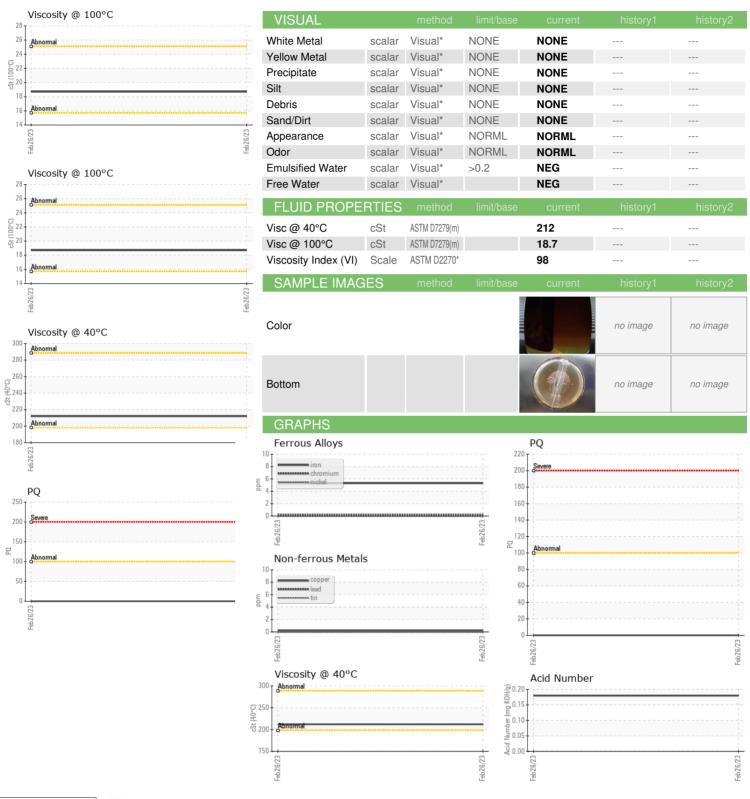



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : PC

+02545891: 5550901

Received Diagnosed

: 16 Mar 2023 : 16 Mar 2023 Diagnostician : Kevin Marson

Test Package : MAR 2 (Additional Tests: KV100, TAN Man, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Suncor - Terra Nova Projects Scotia Centre, 235 Water Strret

St. John's, NL CA A1C 1B6 Contact: Josh Hynes joshynes@suncor.com

> T: (709)778-3575 F: (709)724-2835