


Area
TEAM 1
Machine Id
122553 Turbo Generator
Component
Hydraulic System
Fluid
PETRO CANADA TURBOFLO R&O 32 (1250 GAL)

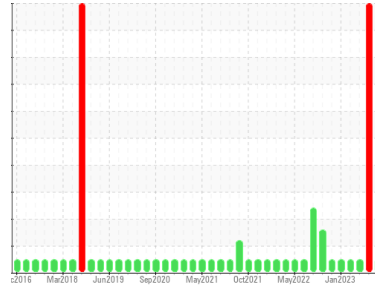

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0070226	WC0801832	PC0070308
Sample Date	Client Info	05 Apr 2023	23 Mar 2023	31 Jan 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	SEVERE	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	1	1
Chromium	ppm	ASTM D5185(m) >20	0	0
Nickel	ppm	ASTM D5185(m) >20	<1	0
Titanium	ppm	ASTM D5185(m)	0	0
Silver	ppm	ASTM D5185(m)	0	0
Aluminum	ppm	ASTM D5185(m) >20	<1	<1
Lead	ppm	ASTM D5185(m) >20	0	1
Copper	ppm	ASTM D5185(m) >20	0	0
Tin	ppm	ASTM D5185(m) >20	0	0
Antimony	ppm	ASTM D5185(m)	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0
Beryllium	ppm	ASTM D5185(m)	0	0
Cadmium	ppm	ASTM D5185(m)	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1
Barium	ppm	ASTM D5185(m)	0	0
Molybdenum	ppm	ASTM D5185(m)	0	<1
Manganese	ppm	ASTM D5185(m)	0	0
Magnesium	ppm	ASTM D5185(m)	0	12
Calcium	ppm	ASTM D5185(m) 0	0	12
Phosphorus	ppm	ASTM D5185(m) 4	19	26
Zinc	ppm	ASTM D5185(m) 0	9	16
Sulfur	ppm	ASTM D5185(m)	1274	1247
Lithium	ppm	ASTM D5185(m)	<1	<1

CONTAMINANTS






method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<1	<1
Sodium	ppm	ASTM D5185(m)	<1	<1
Potassium	ppm	ASTM D5185(m) >20	0	0

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	805	1156	715
Particles >6µm	ASTM D7647 >5000	221	333	187
Particles >14µm	ASTM D7647 >640	14	24	18
Particles >21µm	ASTM D7647 >160	4	7	6
Particles >38µm	ASTM D7647 >40	0	0	0
Particles >71µm	ASTM D7647 >10	0	0	0
Oil Cleanliness	ISO 4406 (c) >--/19/16	17/15/11	17/16/12	17/15/11

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974* 0.15	0.09	0.09	0.06

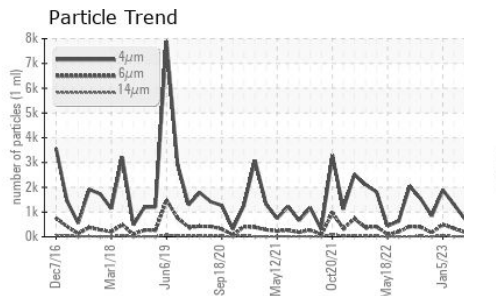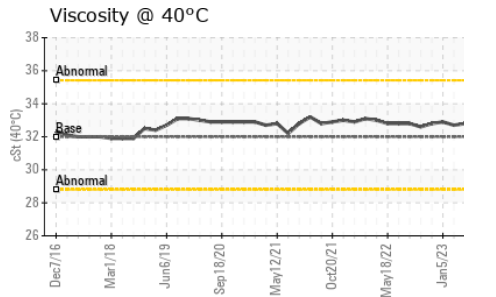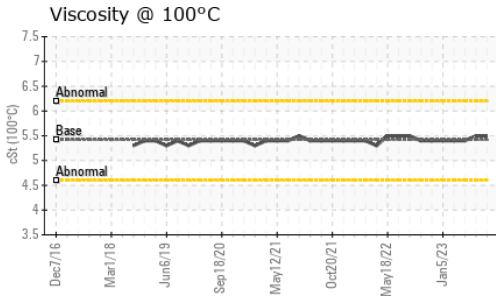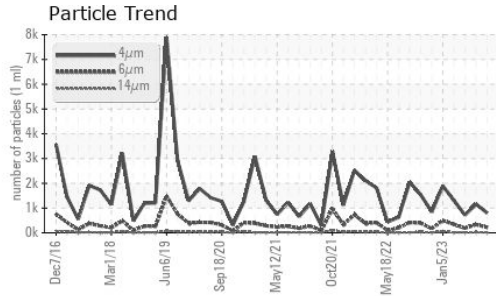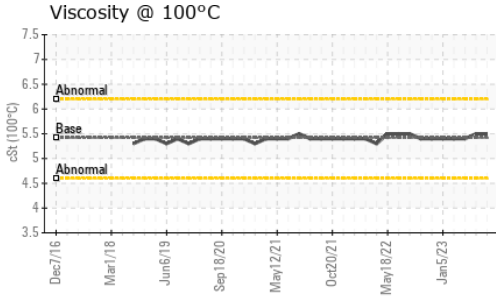

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	32.0	33.1	32.6	32.8
Visc @ 100°C	cSt	ASTM D7279(m)	5.42	5.5	5.5	5.4
Viscosity Index (VI)	Scale	ASTM D2270*	103	101	104	97

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					
MPC					

GRAPHS	



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0070226 **Received** : 13 Apr 2023
Lab Number : 02551165 **Diagnosed** : 13 Apr 2023
Unique Number : 5564180 **Diagnostician** : Wes Davis
Test Package : IND 2 (Additional Tests: KV100, TAN Man, VI)

Dryden Fibre
 Box 3001, 1 Duke Street
 Dryden, ON
 CA P8N 2Z7
 Contact: Adebukola Adekanye
 AADEKANYE@DRYDENFIBRE.CA
 T: (807)223-9950
 F: (807)223-9176

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.