

Machine Id
KOMATSU D519X22 D51

Component
Diesel Engine

Fluid
PETRO CANADA DURON UHP E6 10W40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0059853	PC0055902	PC0059857
Sample Date	Client Info			22 Jun 2023	28 Apr 2023	23 Nov 2022
Machine Age	hrs	Client Info		8638	8535	8349
Oil Age	hrs	Client Info		780	677	491
Oil Changed	Client Info			Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	65	62	46
Chromium	ppm	ASTM D5185(m)	>20	3	3	2
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	3	4	3
Lead	ppm	ASTM D5185(m)	>40	7	7	6
Copper	ppm	ASTM D5185(m)	>330	4	4	3
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Antimony	ppm	ASTM D5185(m)		0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	3	3	3
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	71	75	68
Manganese	ppm	ASTM D5185(m)	0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	80	1167	1237	1114
Calcium	ppm	ASTM D5185(m)	2400	1364	1555	1277
Phosphorus	ppm	ASTM D5185(m)	750	1236	1297	1206
Zinc	ppm	ASTM D5185(m)	840	1457	1540	1384
Sulfur	ppm	ASTM D5185(m)	2130	2514	2748	2593
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	6	6	4
Sodium	ppm	ASTM D5185(m)		6	4	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Fuel	%	ASTM D7593*	>5	0.4	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.8	0.8	0.6
Nitration	Abs/cm	ASTM D7624*	>20	14.1	13.1	12.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	28.6	28.0	27.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	28.5	27.5	25.3











OIL ANALYSIS REPORT

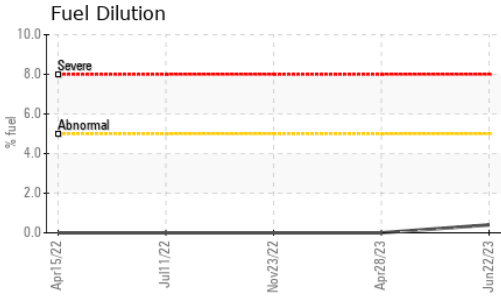

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	92.8	121	115
Visc @ 100°C	cSt	ASTM D7279(m)	14.2	16.2	15.9
Viscosity Index (VI)	Scale	ASTM D2270*	157	143	147

GRAPHS

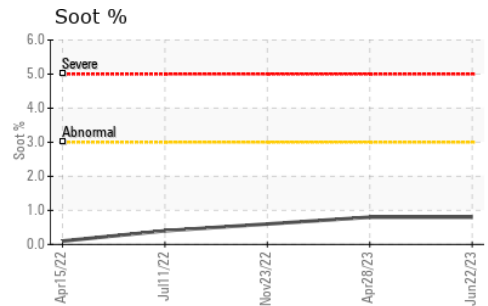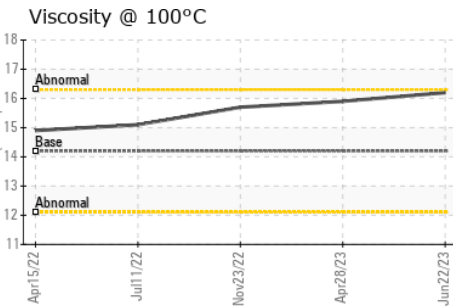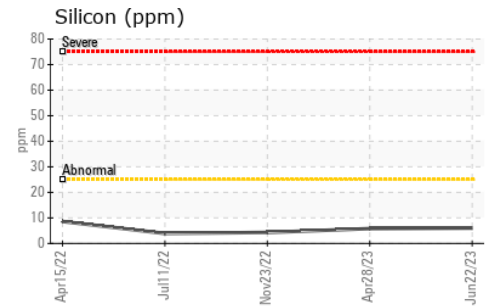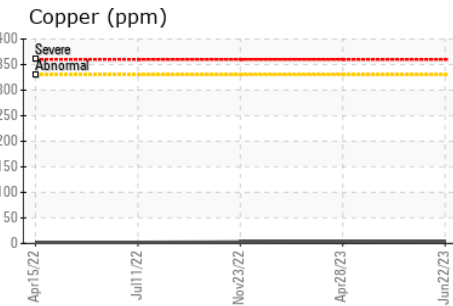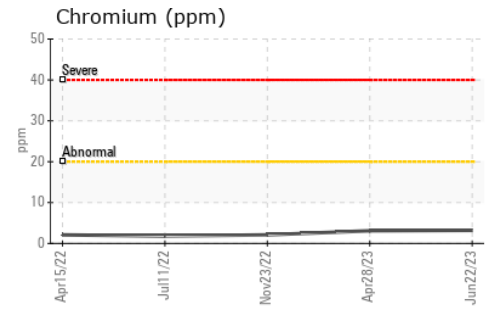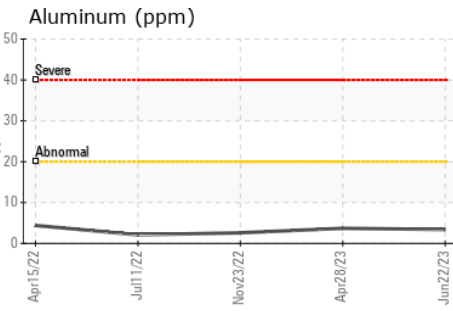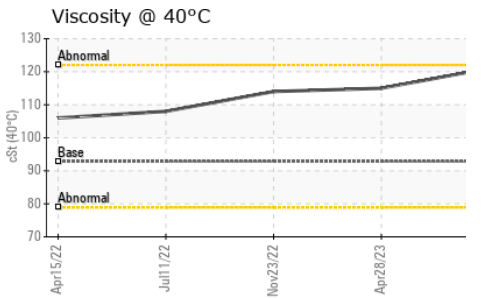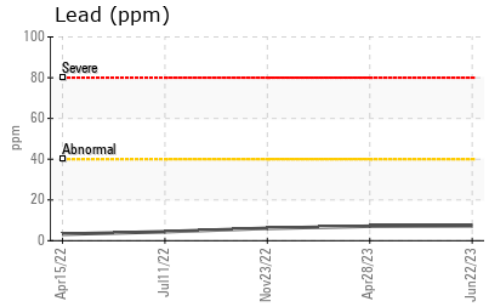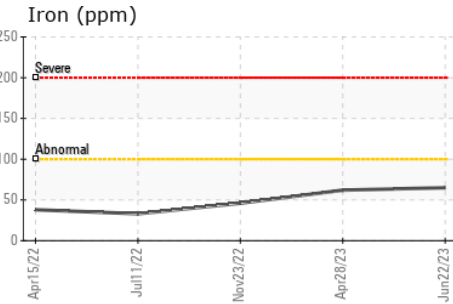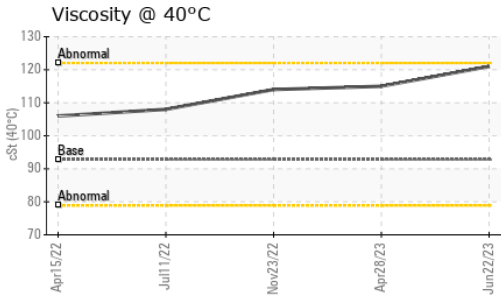

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0059853 **Received** : 23 Jun 2023
Lab Number : 02566067 **Diagnosed** : 26 Jun 2023
Unique Number : 5603113 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: FuelDilution, KV40, PercentFuel, VI)

E.W. EXCAVATION
 2375 RUE ROY
 SHERBROOKE, QC
 CA J1K 1B9
 Contact: Stephanie .
 info@ewexcavation.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: