


OIL ANALYSIS REPORT

PRESS 9 CROWN

Component

Unknown Component

PETRO CANADA ENDURATEX EP 150 (--- GAL)



DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample. Please provide more complete information on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the sample.


Fluid Condition

Additive levels indicate the addition of a different brand, or type of sample. The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.

GAL)				Jun 2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0061352		
Sample Date		Client Info		22 Jun 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METAL	.S	method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)		11		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		2		
Lead	ppm	ASTM D5185(m)		2		
Copper	ppm	ASTM D5185(m)		53		
Tin	ppm	ASTM D5185(m)		2		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	55	6		
Barium	ppm	ASTM D5185(m)	0	3		
Molybdenum	ppm	ASTM D5185(m)	0	0		
Manganese	ppm	ASTM D5185(m)	0	2		
Magnesium	ppm	ASTM D5185(m)	2	1		
Calcium	ppm	ASTM D5185(m)	6	4		
Phosphorus	ppm	ASTM D5185(m)	250	267		
Zinc	ppm	ASTM D5185(m)	3	33		
Sulfur	ppm	ASTM D5185(m)	7500	2542		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		1		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	1		
FLUID DEGRAI	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.5	0.31		



OIL ANALYSIS REPORT

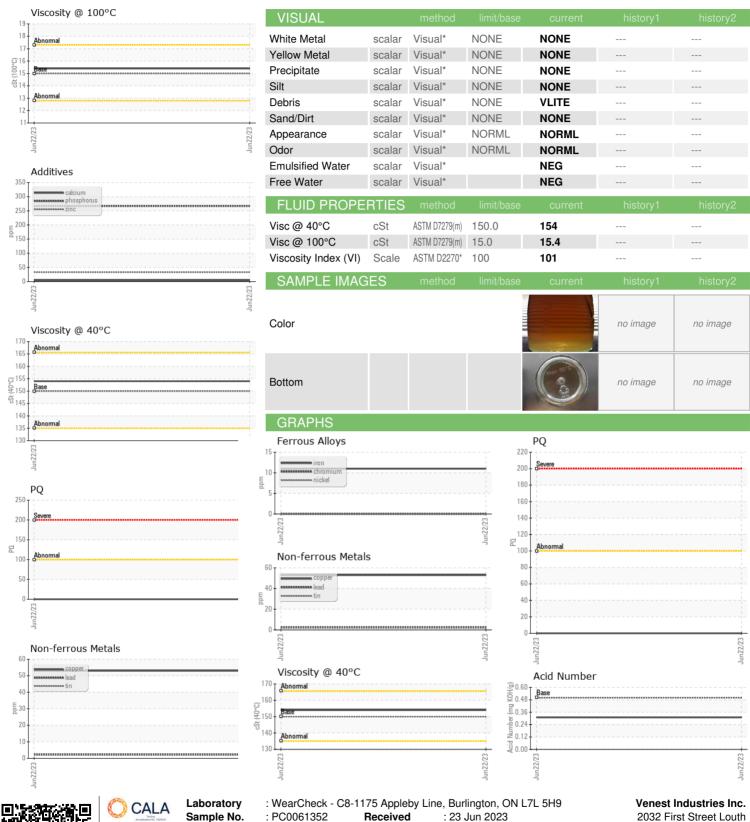



ISO 17025:2017 Accredited

Laboratory

Sample No. Lab Number **Unique Number**

: PC0061352 : 02566272

: 5603318

Diagnosed

: 26 Jun 2023 Diagnostician : Kevin Marson

Test Package : IND 2 (Additional Tests: KV100, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

2032 First Street Louth St. Catharines, ON CA L2S 0C5 Contact: Allen Taylor allen.taylor@magna.com T: (905)401-9948