


Machine Id  
**PRESS 4 NORTH**


Component  
**Bull Gear**

Fluid  
**PETRO CANADA ENDURATEX EP 220 (--- LTR)**

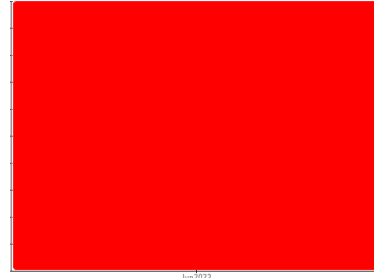

**COMPONENT CONDITION SUMMARY**

**Additives**

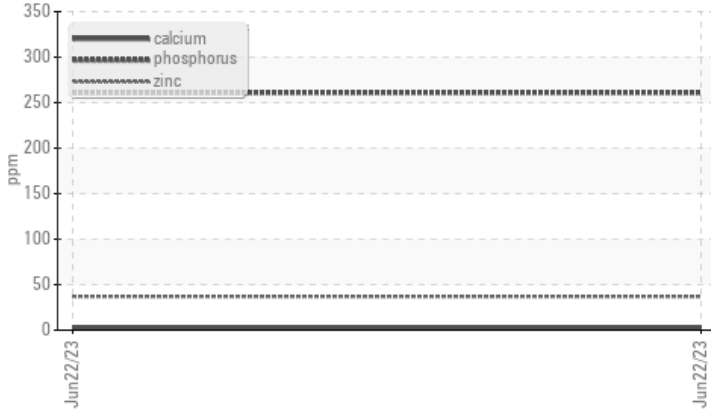

**RECOMMENDATION**

We advise that you check for visible metal particles in the oil. Wear particles and/or ppm levels are abnormally high indicating the need to review OEM limits with attention to components that may generate this type of wear. Include all test results and maintenance activities that have been performed since the abnormal condition was first detected in this review. We recommend that you drain the oil from the component if this has not already been done. Confirm the source of the lubricant being utilized for top-up/fill. An inspection for the source(s) of wear may be warranted at this time. We recommend an early resample to monitor this condition. Re-sampling is suggested to confirm test results prior to significant maintenance activities being performed. Please indicate that this is a resample on your Sample Information Form (SIF). NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

**PROBLEMATIC TEST RESULTS**

Sample Status	Scale	ASTM	Value	SEVERE	---	---
Ferrous Rubbing	Scale 0-10	ASTM D7684*		7		
Ferrous Sliding	Scale 0-10	ASTM D7684*		6		
Ferrous Rolling	Scale 0-10	ASTM D7684*		5		
Zinc	ppm	ASTM D5185(m)	0	37	---	---
Sulfur	ppm	ASTM D5185(m)	11200	3255	---	---
White Metal	scalar	Visual*	NONE	HEAVY	---	---
PrtFilter					no image	no image

**Customer Id:** VENSTC  
**Sample No.:** PC0061626  
**Lab Number:** 02566274  
**Test Package:** IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Bill Quesnel CLS,OMA II,MLA-III,LLA-I +1  
(289)291-4641 x4641  
[Bill.Quesnel@wearcheck.com](mailto:Bill.Quesnel@wearcheck.com)

To change component or sample information:  
Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Inspect Wear Source	---	---	?	An inspection for the source(s) of wear may be warranted at this time.
Monitor	---	---	?	Wear particles and/or ppm levels are abnormally high indicating the need to review OEM limits with attention to components that may generate this type of wear. Include all test results and maintenance activities that have been performed since the abnormal condition was first detected in this review.
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition. Re-sampling is suggested to confirm test results prior to significant maintenance activities being performed. Please indicate that this is a resample on your Sample Information Form (SIF).
Alert	---	---	?	Wear particles and/or ppm levels are abnormally high indicating the need to review OEM limits with attention to components that may generate this type of wear. Include all test results and maintenance activities that have been performed since the abnormal condition was first detected in this review.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.
Check Fluid Source	---	---	?	Confirm the source of the lubricant being utilized for top-up/fill.
Check For Visual Metal	---	---	?	We advise that you check for visible metal particles in the oil.

## HISTORICAL DIAGNOSIS

Machine Id  
**PRESS 4 NORTH**

Component  
**Bull Gear**

Fluid  
**PETRO CANADA ENDURATEX EP 220 (--- LTR)**

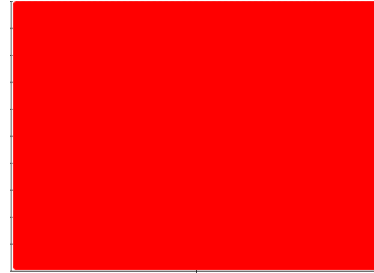

**DIAGNOSIS**

**Recommendation**

We advise that you check for visible metal particles in the oil. Wear particles and/or ppm levels are abnormally high indicating the need to review OEM limits with attention to components that may generate this type of wear. Include all test results and maintenance activities that have been performed since the abnormal condition was first detected in this review. We recommend that you drain the oil from the component if this has not already been done. Confirm the source of the lubricant being utilized for top-up/fill. An inspection for the source(s) of wear may be warranted at this time. We recommend an early resample to monitor this condition. Re-sampling is suggested to confirm test results prior to significant maintenance activities being performed. Please indicate that this is a resample on your Sample Information Form (SIF). NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

**Wear**

Wear particle analysis indicates that the ferrous rolling, ferrous sliding and ferrous rubbing particles are severe. High concentration of visible metal present. Gear wear is indicated.

**Contaminants**

There is no indication of any contamination in the oil.

**Oil Condition**

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

**SAMPLE INFORMATION**

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>PC0061626</b>	---	---
Sample Date	Client Info		<b>22 Jun 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>SEVERE</b>	---	---

**WEAR METALS**

	method	limit/base	current	history 1	history 2
PQ	ASTM D8184*		<b>24</b>	---	---
Iron	ppm	ASTM D5185(m) >150	<b>46</b>	---	---
Chromium	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >25	<b>1</b>	---	---
Lead	ppm	ASTM D5185(m) >100	<b>2</b>	---	---
Copper	ppm	ASTM D5185(m) >50	<b>30</b>	---	---
Tin	ppm	ASTM D5185(m) >10	<b>2</b>	---	---
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

**ADDITIVES**

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m) 60	<b>11</b>	---	---
Barium	ppm	ASTM D5185(m) 0	<b>4</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m) 0	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185(m) 0	<b>1</b>	---	---
Calcium	ppm	ASTM D5185(m) 0	<b>3</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 270	<b>261</b>	---	---
Zinc	ppm	ASTM D5185(m) 0	<b>▲ 37</b>	---	---
Sulfur	ppm	ASTM D5185(m) 11200	<b>▲ 3255</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---





**CONTAMINANTS**

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m) >50	<b>11</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>2</b>	---	---

**FLUID DEGRADATION**

	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.40	<b>0.44</b>	---	---

# OIL ANALYSIS REPORT

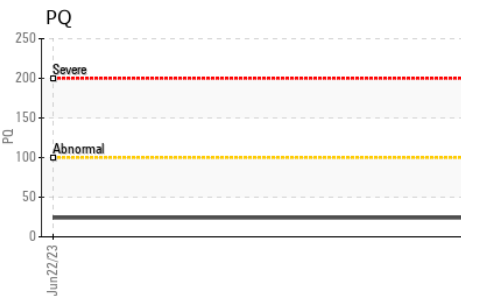
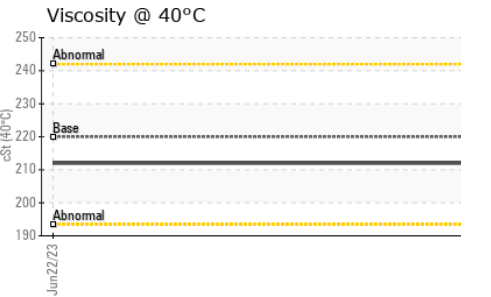
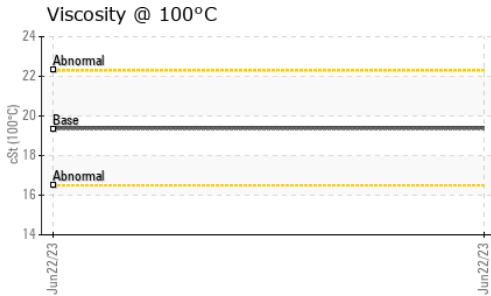
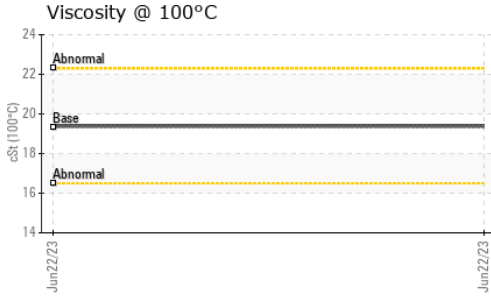


PARAMETER	method	limit/base	current	history 1	history 2
White Metal	scalar	Visual*	NONE	HEAVY	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

PARAMETER	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D7279(m)	220	212	---
Visc @ 100°C	cSt	ASTM D7279(m)	19.35	19.4	---
Viscosity Index (VI)	Scale	ASTM D2270*	99	103	---

PARAMETER	method	limit/base	current	history 1	history 2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

## GRAPHS

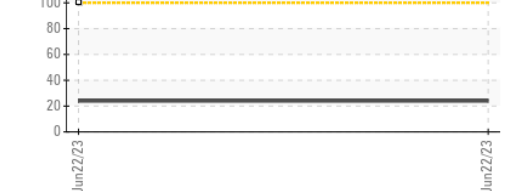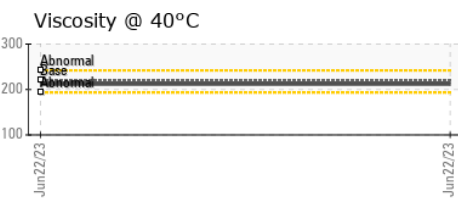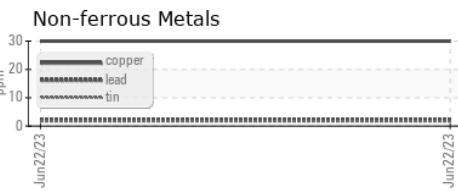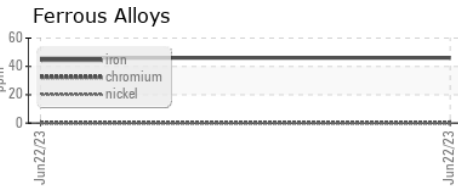



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0061626 **Received** : 23 Jun 2023  
**Lab Number** : 02566274 **Diagnosed** : 06 Jul 2023  
**Unique Number** : 5603320 **Diagnostician** : Bill Quesnel  
**Test Package** : IND 2 ( Additional Tests: A-Ferr, Bottom, BottomAnalysis, FilterPatch, KV100, TAN Man, VI )

**Venest Industries Inc.**  
 2032 First Street Louth  
 St. Catharines, ON  
 CA L2S 0C5  
 Contact: Allen Taylor  
 allen.taylor@magna.com  
 T: (905)401-9948  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

# PARTICLE FILTER REPORT

Machine Id  
**PRESS 4 NORTH**  
Component  
**Bull Gear**  
Fluid  
**PETRO CANADA ENDURATEX EP 220 (--- LTR)**

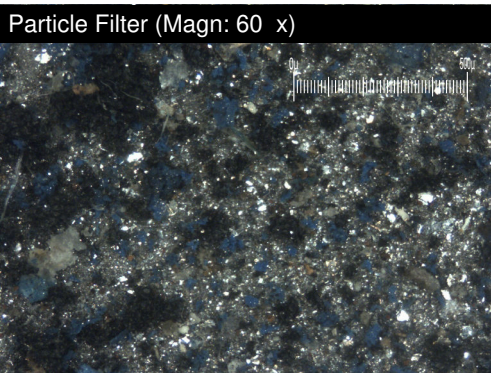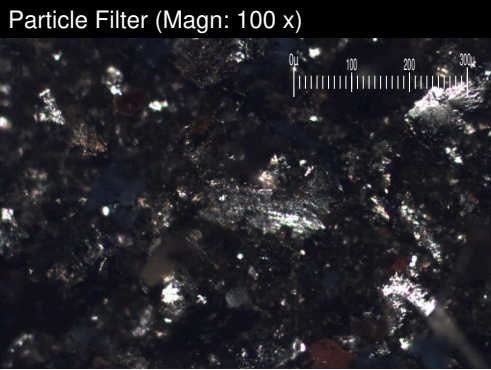

FERROGRAPHY			method	limit/base	current	history 1	history 2
Ferrous Rubbing	Scale 0-10	ASTM D7684*			7		
Ferrous Sliding	Scale 0-10	ASTM D7684*			6		
Ferrous Cutting	Scale 0-10	ASTM D7684*					
Ferrous Rolling	Scale 0-10	ASTM D7684*			5		
Ferrous Break-in	Scale 0-10	ASTM D7684*					
Ferrous Spheres	Scale 0-10	ASTM D7684*					
Ferrous Black Oxides	Scale 0-10	ASTM D7684*					
Ferrous Red Oxides	Scale 0-10	ASTM D7684*					
Ferrous Corrosive	Scale 0-10	ASTM D7684*					
Ferrous Other	Scale 0-10	ASTM D7684*					
Nonferrous Rubbing	Scale 0-10	ASTM D7684*					
Nonferrous Sliding	Scale 0-10	ASTM D7684*					
Nonferrous Cutting	Scale 0-10	ASTM D7684*					
Nonferrous Rolling	Scale 0-10	ASTM D7684*					
Nonferrous Other	Scale 0-10	ASTM D7684*					
Carbonaceous Material	Scale 0-10	ASTM D7684*					
Lubricant Degradation	Scale 0-10	ASTM D7684*					
Sand/Dirt	Scale 0-10	ASTM D7684*					
Fibres	Scale 0-10	ASTM D7684*					
Spheres	Scale 0-10	ASTM D7684*					
Other	Scale 0-10	ASTM D7684*			3		

## WEAR

Wear particle analysis indicates that the ferrous rolling, ferrous sliding and ferrous rubbing particles are severe. High concentration of visible metal present. Gear wear is indicated.

*This page left intentionally blank*