


PROBLEM SUMMARY

Sample Rating Trend

VISUAL METAL

Machine Id
270
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (150 LTR)

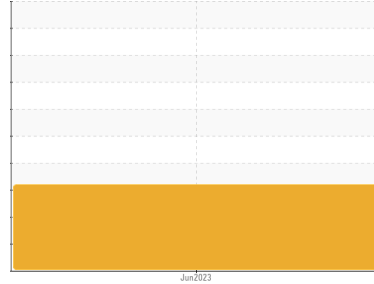

COMPONENT CONDITION SUMMARY

▲ Particle Trend



RECOMMENDATION

We advise that you check for visible metal particles in the oil. We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Particles >4µm	ASTM D7647	>5000	▲ 10549	---	---	---
Particles >6µm	ASTM D7647	>1300	▲ 2397	---	---	---
Particles >14µm	ASTM D7647	>160	▲ 218	---	---	---
Particles >21µm	ASTM D7647	>40	▲ 63	---	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/18/15	---	---	---
White Metal	scalar	Visual*	NONE	▲ VLITE	---	---
PrtFilter					no image	no image

Customer Id: WALTER
Sample No.: PC0076487
Lab Number: 02567294
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check For Visual Metal	---	---	?	We advise that you check for visible metal particles in the oil.

HISTORICAL DIAGNOSIS

Machine Id
270

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (150 LTR)

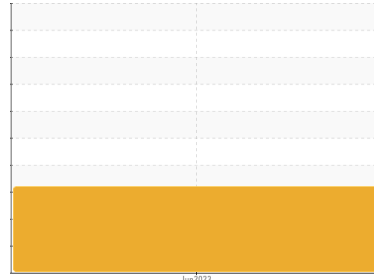

DIAGNOSIS

▲ **Recommendation**

We advise that you check for visible metal particles in the oil. We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

▲ **Wear**

Light concentration of visible metal present.

▲ **Contamination**

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid.



SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		PC0076487	---	---
Sample Date	Client Info		27 Jun 2023	---	---
Machine Age	yrs	Client Info	0	---	---
Oil Age	yrs	Client Info	2	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185(m) >20	<1	---	---
Chromium	ppm	ASTM D5185(m) >20	0	---	---
Nickel	ppm	ASTM D5185(m) >20	0	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m) >20	<1	---	---
Lead	ppm	ASTM D5185(m) >20	0	---	---
Copper	ppm	ASTM D5185(m) >20	0	---	---
Tin	ppm	ASTM D5185(m) >20	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m) 0	<1	---	---
Barium	ppm	ASTM D5185(m) 0	0	---	---
Molybdenum	ppm	ASTM D5185(m) 0	0	---	---
Manganese	ppm	ASTM D5185(m) 1	0	---	---
Magnesium	ppm	ASTM D5185(m) 0	<1	---	---
Calcium	ppm	ASTM D5185(m) 100	97	---	---
Phosphorus	ppm	ASTM D5185(m) 670	653	---	---
Zinc	ppm	ASTM D5185(m) 850	789	---	---
Sulfur	ppm	ASTM D5185(m) 1600	1432	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m) >15	<1	---	---
Sodium	ppm	ASTM D5185(m)	0	---	---
Potassium	ppm	ASTM D5185(m) >20	0	---	---






FLUID CLEANLINESS

	method	limit/base	current	history 1	history 2
Particles >4µm	ASTM D7647	>5000	▲ 10549	---	---
Particles >6µm	ASTM D7647	>1300	▲ 2397	---	---
Particles >14µm	ASTM D7647	>160	▲ 218	---	---
Particles >21µm	ASTM D7647	>40	▲ 63	---	---
Particles >38µm	ASTM D7647	>10	2	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/18/15	---	---

FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.60	0.66	---	---

OIL ANALYSIS REPORT

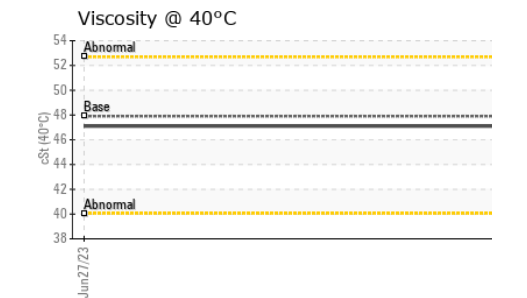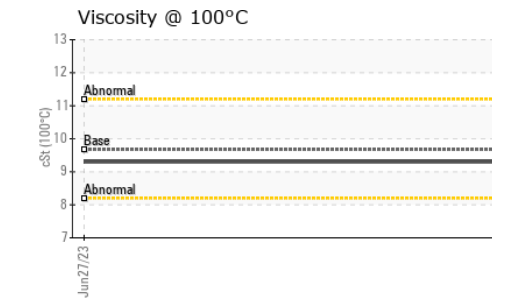
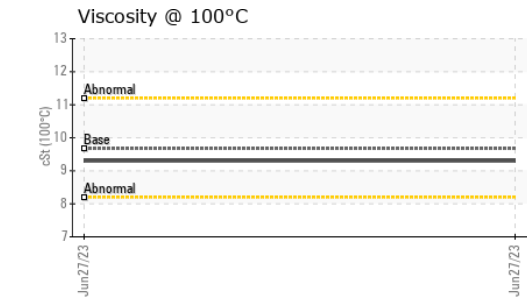
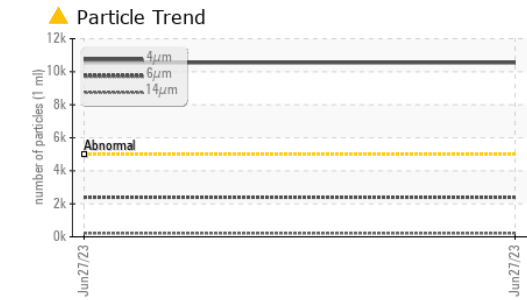
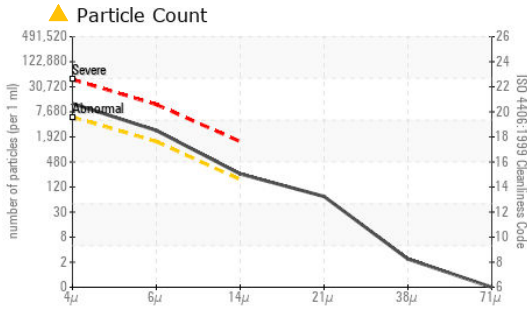


VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	Visual*	NONE	▲ VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D7279(m)	47.9	47.1	---
Visc @ 100°C	cSt	ASTM D7279(m)	9.67	9.3	---
Viscosity Index (VI)	Scale	ASTM D2270*	192	184	---

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

GRAPHS

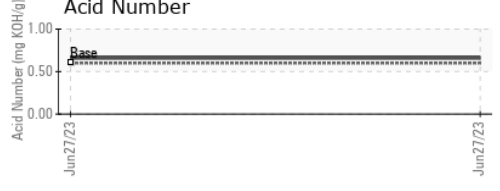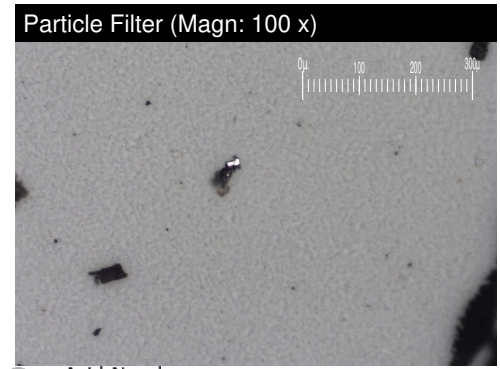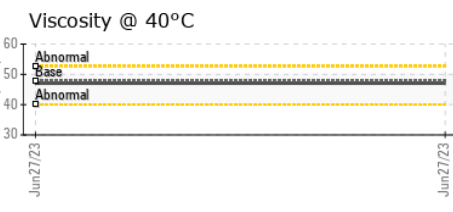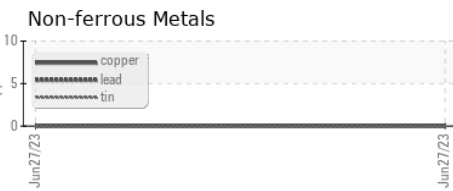

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0076487 **Received** : 29 Jun 2023
Lab Number : 02567294 **Diagnosed** : 30 Jun 2023
Unique Number : 5604340 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: Bottom, BottomAnalysis, FilterPatch, KV100, PrtFilter, VI)

WALINGA
 938 GLENGARRY CRESCENT
 FERGUS, ON
 CA N1M 2W7
 Contact: Duane Swaving
 duane.swaving@walinga.com
 T: (519)787-8227
 F: (519)787-8210

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.