

PROBLEM SUMMARY

Sample Rating Trend




ISO



Machine Id
398
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (50 LTR)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

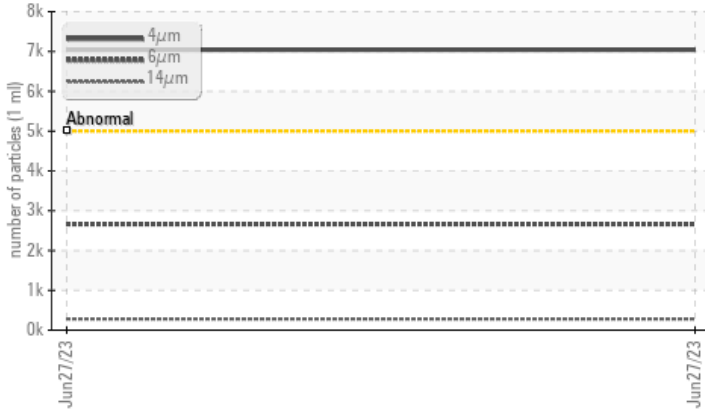

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ASTM D7647	ABNORMAL	---	---
Particles >4µm	>5000	▲ 7041	---	---	---
Particles >6µm	>1300	▲ 2664	---	---	---
Particles >14µm	>160	▲ 280	---	---	---
Particles >21µm	>40	▲ 72	---	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 20/19/15	---	---

Customer Id: WALTER
Sample No.: PC0076491
Lab Number: 02567314
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

Machine Id
398

Component

Hydraulic System

Fluid

PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (50 LTR)



DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	PC0076491	---	---
Sample Date	Client Info	27 Jun 2023	---	---
Machine Age	hrs	Client Info	0	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history 1	history 2		
Iron	ppm	ASTM D5185(m)	>20	<1	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>20	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	---	---
Lead	ppm	ASTM D5185(m)	>20	0	---	---
Copper	ppm	ASTM D5185(m)	>20	<1	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES

method	limit/base	current	history 1	history 2		
Boron	ppm	ASTM D5185(m)	0	<1	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	1	0	---	---
Magnesium	ppm	ASTM D5185(m)	0	<1	---	---
Calcium	ppm	ASTM D5185(m)	100	98	---	---
Phosphorus	ppm	ASTM D5185(m)	670	662	---	---
Zinc	ppm	ASTM D5185(m)	850	792	---	---
Sulfur	ppm	ASTM D5185(m)	1600	1445	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS

method	limit/base	current	history 1	history 2		
Silicon	ppm	ASTM D5185(m)	>15	<1	---	---
Sodium	ppm	ASTM D5185(m)		0	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---






FLUID CLEANLINESS

method	limit/base	current	history 1	history 2	
Particles >4µm	ASTM D7647	>5000	▲ 7041	---	---
Particles >6µm	ASTM D7647	>1300	▲ 2664	---	---
Particles >14µm	ASTM D7647	>160	▲ 280	---	---
Particles >21µm	ASTM D7647	>40	▲ 72	---	---
Particles >38µm	ASTM D7647	>10	1	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 20/19/15	---	---

FLUID DEGRADATION

method	limit/base	current	history 1	history 2		
Acid Number (AN)	mg KOH/g	ASTM D974*	0.60	0.70	---	---

OIL ANALYSIS REPORT

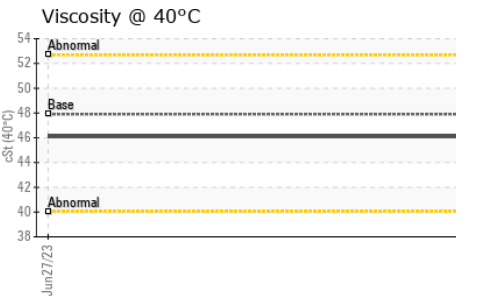
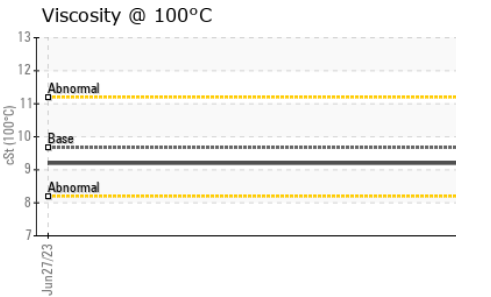
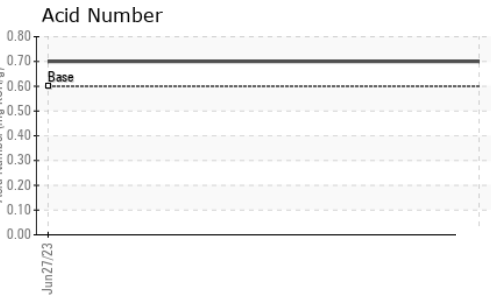
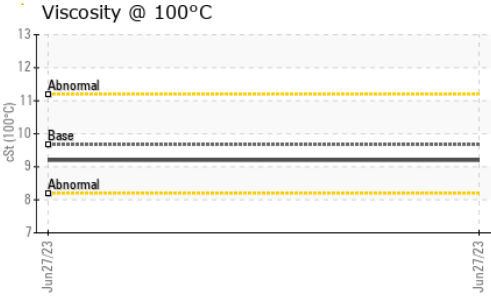
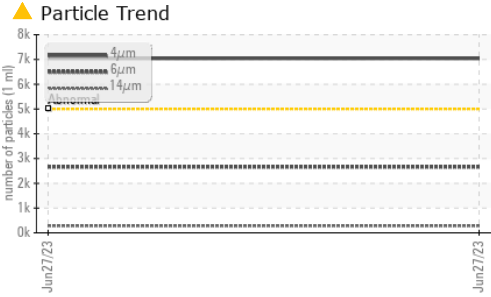


VISUAL	method	limit/base	current	history 1	history 2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 40°C	cSt	ASTM D7279(m)	47.9	46.1	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	9.67	9.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	192	186	---	---

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
Color				no image	no image
Bottom				no image	no image

GRAPHS

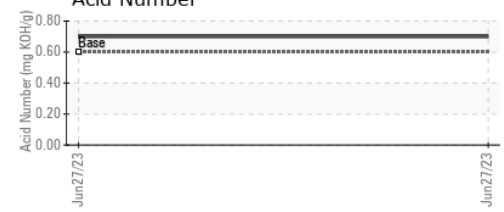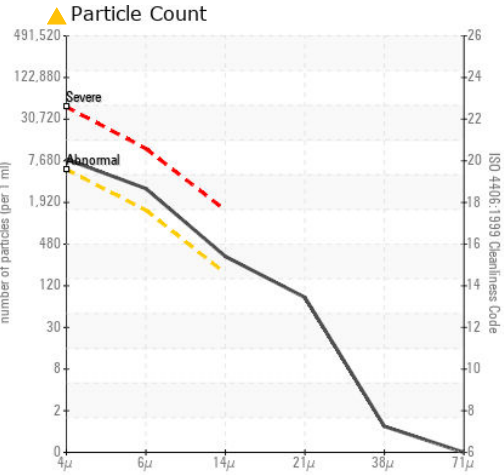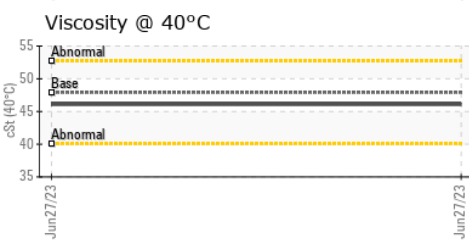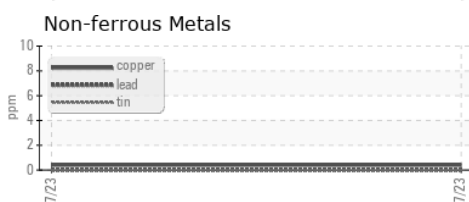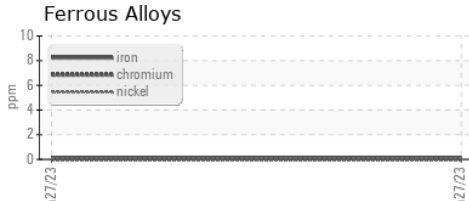

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0076491 **Received** : 29 Jun 2023
Lab Number : 02567314 **Diagnosed** : 30 Jun 2023
Unique Number : 5604360 **Diagnostician** : Wes Davis
Test Package : IND 2 (Additional Tests: KV100, VI)

WALINGA
 938 GLENGARRY CRESCENT
 FERGUS, ON
 CA N1M 2W7
 Contact: Duane Swaving
 duane.swaving@walinga.com
 T: (519)787-8227
 F: (519)787-8210

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.