




OIL ANALYSIS REPORT

Sample Rating Trend

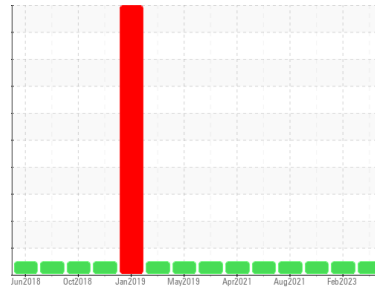

NORMAL



Machine Id
401111

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		GFL0085948	GFL0072836	GFL0039035
Sample Date	Client Info		03 Jul 2023	16 Feb 2023	25 Oct 2021
Machine Age	hrs	Client Info	23462	22464	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185(m) >100	20	18	28
Chromium	ppm	ASTM D5185(m) >20	<1	<1	1
Nickel	ppm	ASTM D5185(m) >4	0	<1	0
Titanium	ppm	ASTM D5185(m)	0	<1	0
Silver	ppm	ASTM D5185(m) >3	0	0	<1
Aluminum	ppm	ASTM D5185(m) >20	2	2	2
Lead	ppm	ASTM D5185(m) >40	2	1	2
Copper	ppm	ASTM D5185(m) >330	<1	<1	<1
Tin	ppm	ASTM D5185(m) >15	0	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m) 2	2	2	3
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 50	59	60	60
Manganese	ppm	ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 950	975	976	1014
Calcium	ppm	ASTM D5185(m) 1050	1035	1114	1064
Phosphorus	ppm	ASTM D5185(m) 995	1051	1096	1078
Zinc	ppm	ASTM D5185(m) 1180	1171	1213	1257
Sulfur	ppm	ASTM D5185(m) 2600	2474	2660	2534
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m) >25	6	7	6
Sodium	ppm	ASTM D5185(m)	5	7	5
Potassium	ppm	ASTM D5185(m) >20	<1	<1	2

INFRA-RED


	method	limit/base	current	history 1	history 2
Soot %	%	ASTM D7844* >3	1	0.6	0.8
Nitration	Abs/cm	ASTM D7624* >20	8.8	8.5	9.5
Sulfation	Abs/.1mm	ASTM D7415* >30	21.4	21.5	22.2

FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	ASTM D7414* >25	15.8	15.4	16.6











OIL ANALYSIS REPORT

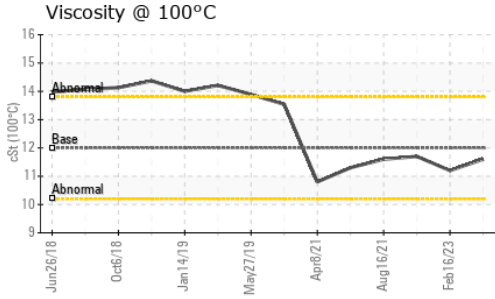

VISUAL	method	limit/base	current	history 1	history 2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.6	11.2

GRAPHS

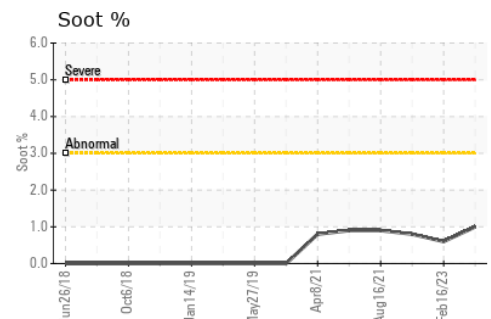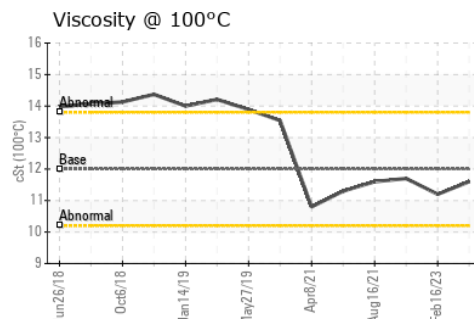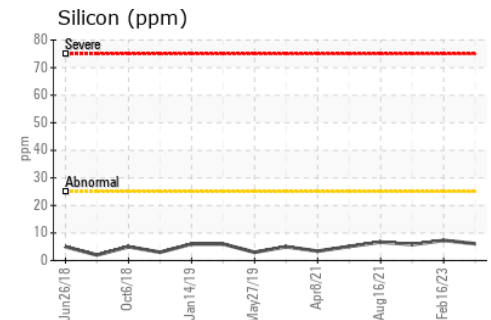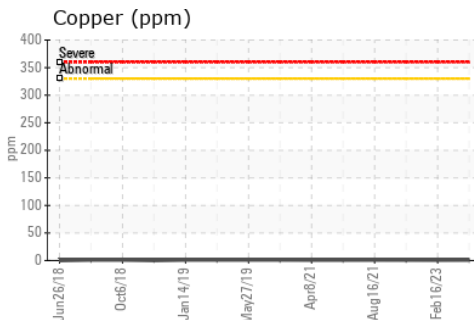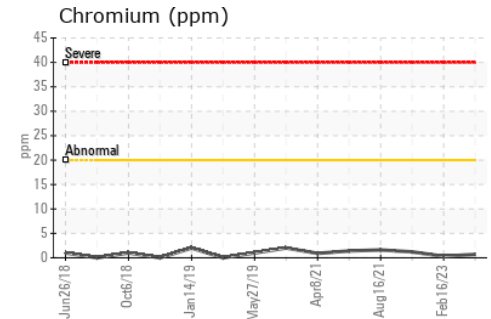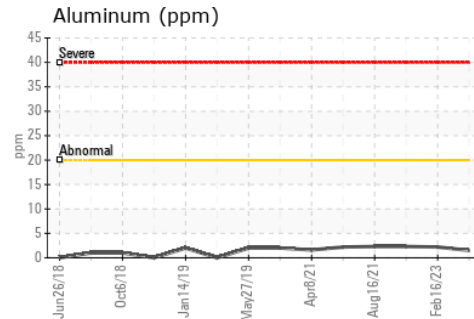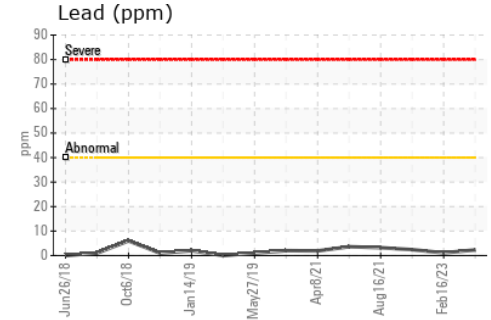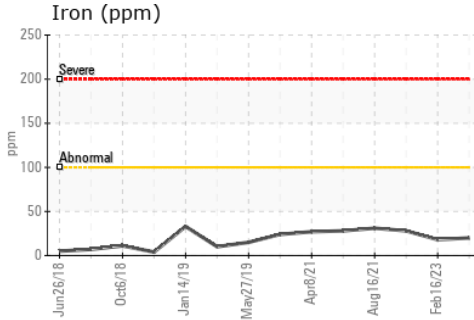

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 554 - Edmonton SW**
Sample No. : GFL0085948 **Received** : 04 Jul 2023
Lab Number : 02567694 **Diagnosed** : 04 Jul 2023
Unique Number : 5604740 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Antonio De Rosa
 atheros@gflenv.com
 T: (780)509-2640
 F: (780)444-8851