

OIL ANALYSIS REPORT


Sample Rating Trend

NORMAL



Area
Scoop 6 Yard
Machine Id
LHD6105

Component
Transmission (Manual)
Fluid
PETRO CANADA DURATRAN (37 LTR)

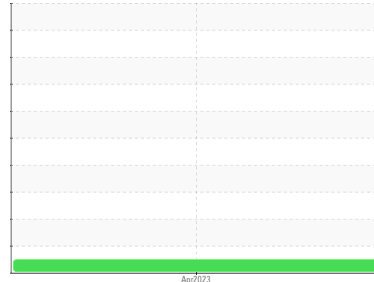

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		PC0050462	---	---
Sample Date	Client Info		23 Apr 2023	---	---
Machine Age	hrs	Client Info	1130	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed		Client Info	N/A	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185(m)	>200	8	---
Chromium	ppm	ASTM D5185(m)	>5	0	---
Nickel	ppm	ASTM D5185(m)	>5	0	---
Titanium	ppm	ASTM D5185(m)		<1	---
Silver	ppm	ASTM D5185(m)	>7	0	---
Aluminum	ppm	ASTM D5185(m)	>25	1	---
Lead	ppm	ASTM D5185(m)	>45	9	---
Copper	ppm	ASTM D5185(m)	>225	4	---
Tin	ppm	ASTM D5185(m)	>10	0	---
Antimony	ppm	ASTM D5185(m)		0	---
Vanadium	ppm	ASTM D5185(m)		0	---
Beryllium	ppm	ASTM D5185(m)		0	---
Cadmium	ppm	ASTM D5185(m)		0	---

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m)	110	29	---
Barium	ppm	ASTM D5185(m)	0.0	0	---
Molybdenum	ppm	ASTM D5185(m)	0.0	<1	---
Manganese	ppm	ASTM D5185(m)	1	<1	---
Magnesium	ppm	ASTM D5185(m)	13	16	---
Calcium	ppm	ASTM D5185(m)	3610	2633	---
Phosphorus	ppm	ASTM D5185(m)	1192	976	---
Zinc	ppm	ASTM D5185(m)	1455	1098	---
Sulfur	ppm	ASTM D5185(m)	2641	2617	---
Lithium	ppm	ASTM D5185(m)		<1	---



CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m)	>125	5	---
Sodium	ppm	ASTM D5185(m)		12	---
Potassium	ppm	ASTM D5185(m)	>20	1	---

VISUAL

	method	limit/base	current	history 1	history 2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---









OIL ANALYSIS REPORT

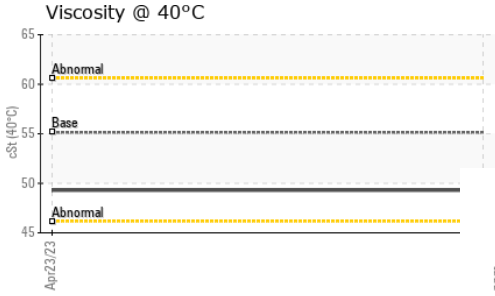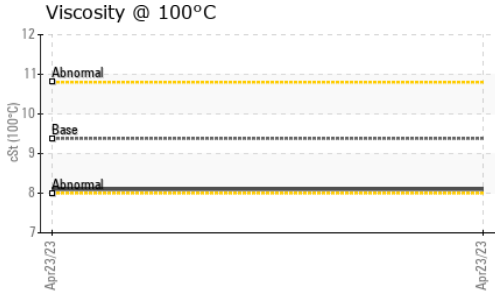

FLUID PROPERTIES		method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D7279(m)	55.14	49.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	9.38	8.1	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	153	136	---	---

SAMPLE IMAGES		method	limit/base	current	history 1	history 2
Color				no image	no image	
Bottom				no image	no image	

GRAPHS

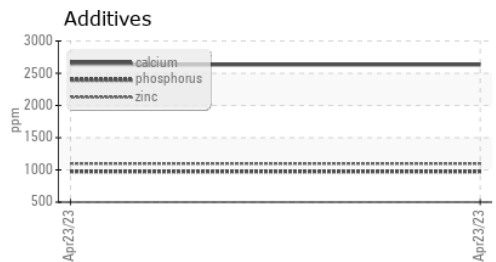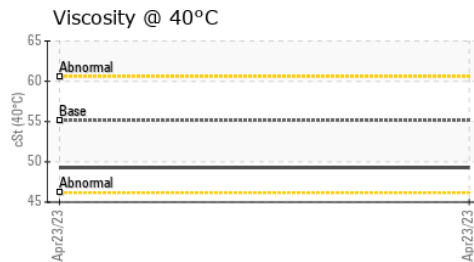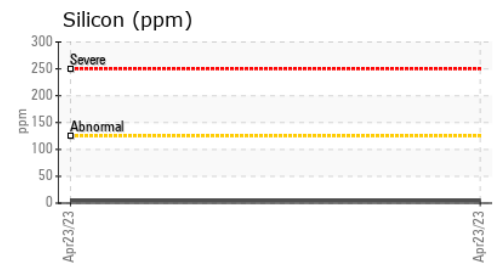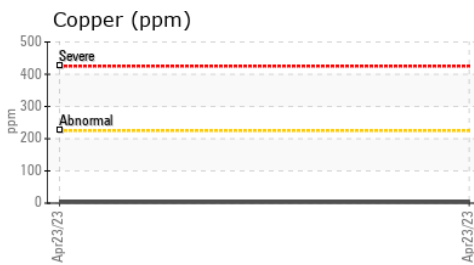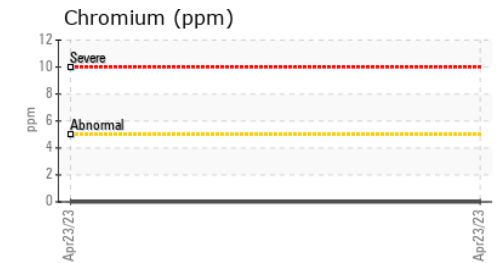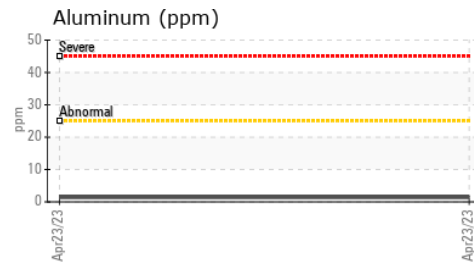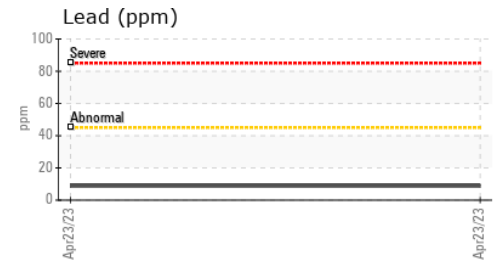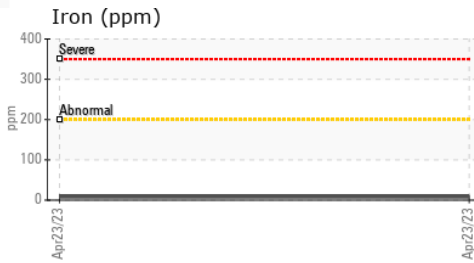

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0050462
Lab Number : 02567822
Unique Number : 5604868
Test Package : MOB 1 (Additional Tests: KV100, VI)

Lakeshore Gold Timmins West
 Timmins, ON
 CA
 Contact: Adam Koscielak
 adam.koscielak@HFSinclair.com
 T:
 F:

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*