




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

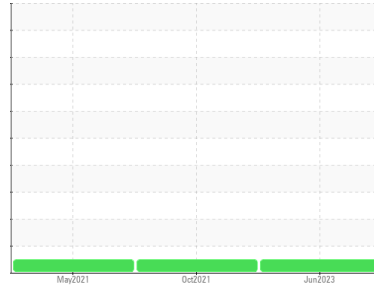

Machine Id
201081

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		GFL0077039	GFL0035421	GFL0024403
Sample Date	Client Info		29 Jun 2023	20 Oct 2021	14 May 2021
Machine Age	hrs	Client Info	121430	1011	919
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history 1	history 2	
Iron	ppm	ASTM D5185(m)	>65	8	8	8
Chromium	ppm	ASTM D5185(m)	>10	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>10	2	3	2
Lead	ppm	ASTM D5185(m)	>30	<1	1	1
Copper	ppm	ASTM D5185(m)	>30	<1	1	<1
Tin	ppm	ASTM D5185(m)	>4	0	<1	0
Antimony	ppm	ASTM D5185(m)		0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history 1	history 2	
Boron	ppm	ASTM D5185(m)	0	8	10	47
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	57	56	59
Manganese	ppm	ASTM D5185(m)	0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	943	957	891
Calcium	ppm	ASTM D5185(m)	1070	1027	978	1049
Phosphorus	ppm	ASTM D5185(m)	1150	1049	1013	992
Zinc	ppm	ASTM D5185(m)	1270	1154	1151	1196
Sulfur	ppm	ASTM D5185(m)	2060	2578	2541	2694
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history 1	history 2	
Silicon	ppm	ASTM D5185(m)	>20	5	4	4
Sodium	ppm	ASTM D5185(m)		2	2	2
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1

INFRA-RED


	method	limit/base	current	history 1	history 2	
Soot %	%	ASTM D7844*	>6	0.1	0.2	0.2
Nitration	Abs/cm	ASTM D7624*	>20	5.2	5.4	5.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.0	19.3	19.1

FLUID DEGRADATION

	method	limit/base	current	history 1	history 2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.3	13.7	13.8











OIL ANALYSIS REPORT

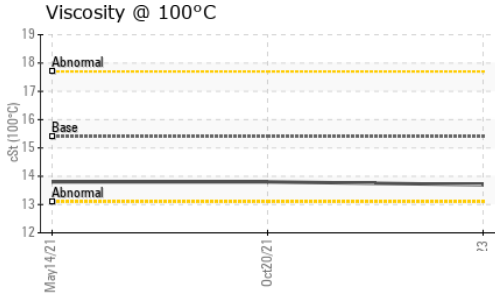

VISUAL		method	limit/base	current	history 1	history 2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.7	13.8	13.8

GRAPHS

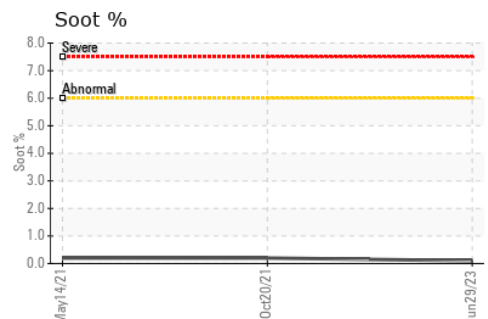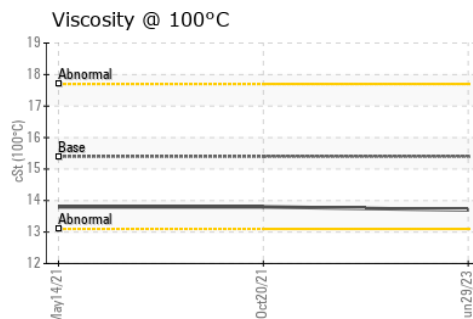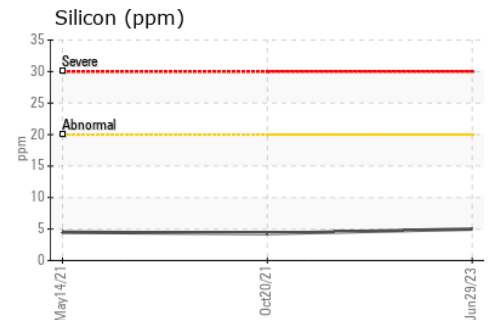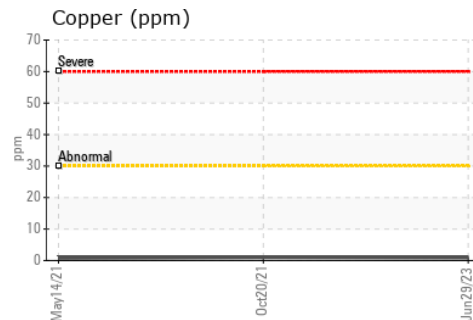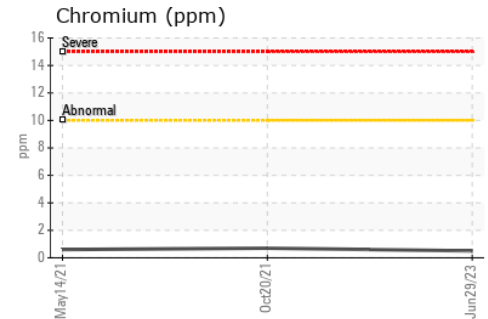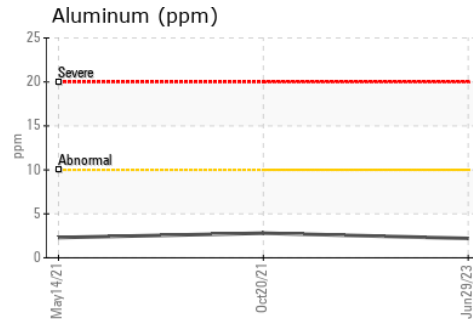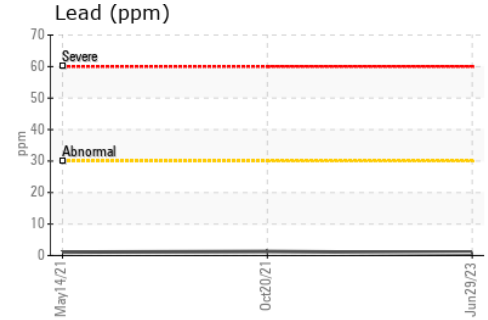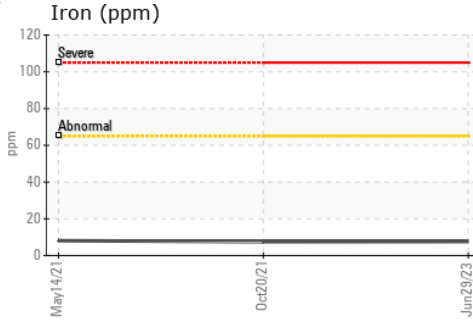

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 575 - Squamish Hauling
Sample No. : GFL0077039 **Received** : 06 Jul 2023 38950 Queens Way,
Lab Number : 02568157 **Diagnosed** : 06 Jul 2023 Squamish, BC
Unique Number : 5605203 **Diagnostician** : Wes Davis CA V8B 0K8
Test Package : MOB 1 **Contact:** Dean Imbeau
 dimbeau@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Dean Imbeau
 dimbeau@gflenv.com
 T: (604)892-5604
 F: (604)892-5238