OIL ANALYSIS REPORT

Sample Rating Trend

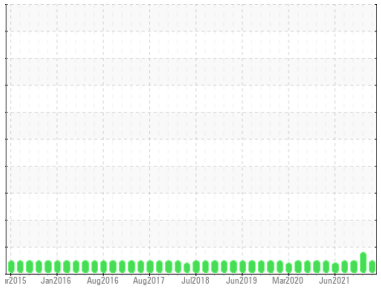

NORMAL

Area
Cranes [450159533]
Machine Id
Crane - Mid - Hydraulic System (Luffing) (S/N Sample Tag MA-04002-S1)
Component
Hydraulic System
Fluid
PETRO CANADA ATF DEXRON III/MERCON (800 LTR)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number		Client Info		**PC0052191**	PC0052669	PC416834
Sample Date		Client Info		**14 Jun 2023**	02 May 2023	05 Oct 2021
Machine Age	hrs	Client Info		**0**	0	0
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**NORMAL**	ABNORMAL	NORMAL

WEAR METALS		method	limit/base	current	history 1	history 2
PQ		ASTM D8184*		**0**	0	0
Iron	ppm	ASTM D5185(m)	>20	**2**	2	1
Chromium	ppm	ASTM D5185(m)	>10	**0**	0	0
Nickel	ppm	ASTM D5185(m)	>10	**0**	<1	<1
Titanium	ppm	ASTM D5185(m)		**0**	0	0
Silver	ppm	ASTM D5185(m)		**0**	0	<1
Aluminum	ppm	ASTM D5185(m)	>10	**<1**	<1	<1
Lead	ppm	ASTM D5185(m)	>20	**2**	2	2
Copper	ppm	ASTM D5185(m)	>20	**3**	3	3
Tin	ppm	ASTM D5185(m)	>10	**0**	<1	<1
Antimony	ppm	ASTM D5185(m)		**0**	<1	0
Vanadium	ppm	ASTM D5185(m)		**0**	0	0
Beryllium	ppm	ASTM D5185(m)		**0**	0	0
Cadmium	ppm	ASTM D5185(m)		**0**	0	0

ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m)	130	**81**	79	90
Barium	ppm	ASTM D5185(m)	1.0	**7**	7	7
Molybdenum	ppm	ASTM D5185(m)	0.0	**<1**	0	<1
Manganese	ppm	ASTM D5185(m)		**0**	0	0
Magnesium	ppm	ASTM D5185(m)	1.0	**<1**	<1	<1
Calcium	ppm	ASTM D5185(m)	20	**35**	36	35
Phosphorus	ppm	ASTM D5185(m)	280	**293**	291	294
Zinc	ppm	ASTM D5185(m)	10	**130**	120	112
Sulfur	ppm	ASTM D5185(m)	440	**772**	778	768
Lithium	ppm	ASTM D5185(m)		**<1**	<1	<1

CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m)	>15	**1**	1	1
Sodium	ppm	ASTM D5185(m)		**2**	2	2
Potassium	ppm	ASTM D5185(m)	>20	**<1**	<1	1

FLUID CLEANLINESS		method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		**2777**	17418	1644
Particles >6µm		ASTM D7647	>1300	**345**	▲ 2627	153
Particles >14µm		ASTM D7647	>160	**11**	18	10
Particles >21µm		ASTM D7647	>40	**3**	5	3
Particles >38µm		ASTM D7647	>10	**0**	1	0
Particles >71µm		ASTM D7647	>3	**0**	1	0
Oil Cleanliness		ISO 4406 (c)	>--/17/14	**19/16/11**	▲ 21/19/11	18/14/10

OIL ANALYSIS REPORT

Particle Count

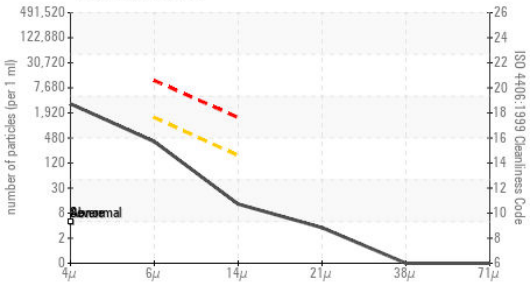

Acid Number

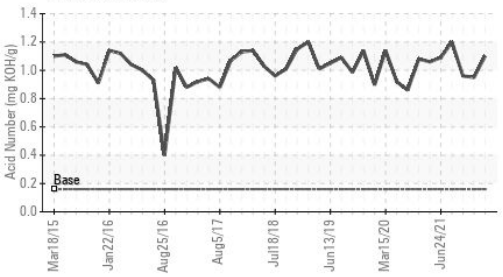

Viscosity @ 100°C

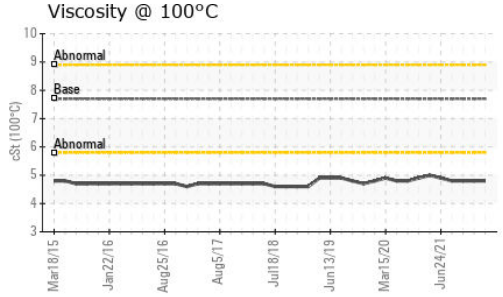

Viscosity @ 40°C

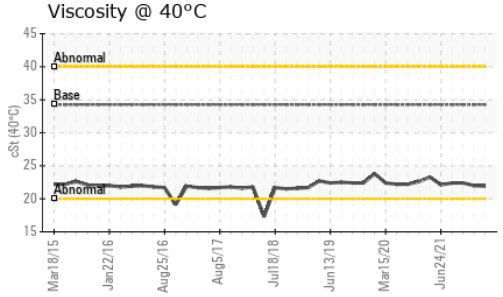

PQ

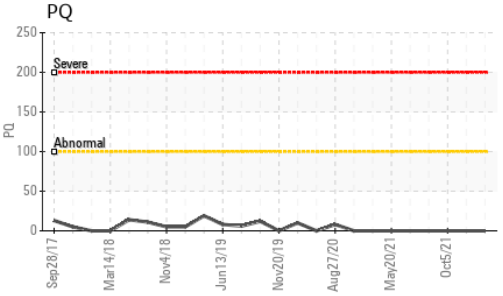

FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.16	**1.10**	0.95	0.96

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	Visual*	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	**NONE**	NONE	NONE
Precipitate	scalar	Visual*	NONE	**NONE**	NONE	NONE
Silt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Debris	scalar	Visual*	NONE	**NONE**	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Appearance	scalar	Visual*	NORML	**NORML**	NORML	NORML
Odor	scalar	Visual*	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	**NEG**	NEG	NEG
Free Water	scalar	Visual*		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D7279(m)	34.26	**21.9**	22.0	22.4
Visc @ 100°C	cSt	ASTM D7279(m)	7.7	**4.8**	4.8	4.8
Viscosity Index (VI)	Scale	ASTM D2270*	210	**145**	144	139

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
Color					
Bottom					

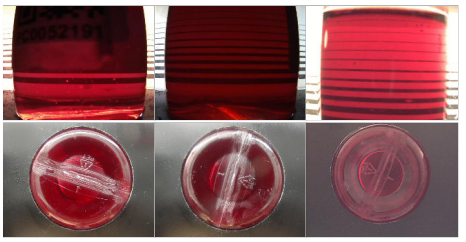

ISO 17025:2017 Accredited Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0052191 **Received** : 06 Jul 2023
Lab Number : 02568259 **Diagnosed** : 07 Jul 2023
Unique Number : 5605305 **Diagnostician** : Kevin Marson
Test Package : MAR 2 (Additional Tests: KV100, PQ, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.

Suncor - Terra Nova Projects
Scotia Centre, 235 Water Strret
St. John`s, NL
CA A1C 1B6
Contact: Josh Hynes
joshynes@suncor.com
T: (709)778-3575
F: (709)724-2835