


Area
Cranes [450159533]
 Machine Id
Crane - Mid - Hydraulic System (Hoisting) (S/N Sample Tag MA-04002-S3)
 Component
Hydraulic System
 Fluid
PETRO CANADA ATF DEXRON III/MERCON (800 LTR)

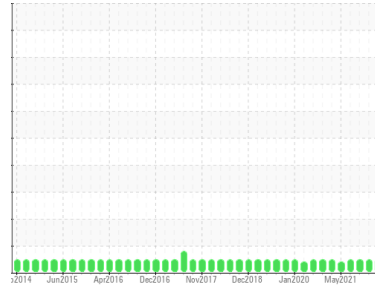

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history 1 history 2

| | | | | |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | PC0052189 | PC416835 | PC0040540 |
| Sample Date | Client Info | 14 Jun 2023 | 05 Oct 2021 | 02 Aug 2021 |
| Machine Age | hrs | Client Info | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 |
| Oil Changed | Client Info | N/A | N/A | N/A |
| Sample Status | | NORMAL | NORMAL | NORMAL |

WEAR METALS method limit/base current history 1 history 2

| | | | | | |
|-----------|-------------|-------------------|--------------|----|----|
| PQ | ASTM D8184* | | 0 | 0 | 0 |
| Iron | ppm | ASTM D5185(m) >20 | 2 | 1 | 1 |
| Chromium | ppm | ASTM D5185(m) >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) >10 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | 0 | <1 | <1 |
| Aluminum | ppm | ASTM D5185(m) >10 | <1 | <1 | <1 |
| Lead | ppm | ASTM D5185(m) >20 | 1 | 2 | 2 |
| Copper | ppm | ASTM D5185(m) >20 | 3 | 3 | 3 |
| Tin | ppm | ASTM D5185(m) >10 | <1 | <1 | <1 |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES method limit/base current history 1 history 2

| | | | | | |
|------------|-----|-------------------|--------------|-----|-----|
| Boron | ppm | ASTM D5185(m) 130 | 81 | 91 | 88 |
| Barium | ppm | ASTM D5185(m) 1.0 | 7 | 8 | 7 |
| Molybdenum | ppm | ASTM D5185(m) 0.0 | <1 | 0 | <1 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) 1.0 | <1 | <1 | <1 |
| Calcium | ppm | ASTM D5185(m) 20 | 34 | 35 | 34 |
| Phosphorus | ppm | ASTM D5185(m) 280 | 292 | 294 | 283 |
| Zinc | ppm | ASTM D5185(m) 10 | 129 | 113 | 106 |
| Sulfur | ppm | ASTM D5185(m) 440 | 769 | 775 | 751 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |






CONTAMINANTS method limit/base current history 1 history 2

| | | | | | |
|-----------|-----|-------------------|--------------|----|---|
| Silicon | ppm | ASTM D5185(m) >15 | 1 | 1 | 1 |
| Sodium | ppm | ASTM D5185(m) | 2 | 2 | 2 |
| Potassium | ppm | ASTM D5185(m) >20 | <1 | <1 | 1 |

FLUID CLEANLINESS method limit/base current history 1 history 2

| | | | | | |
|-----------------|--------------|-----------|-----------------|----------|---------|
| Particles >4µm | ASTM D7647 | >5000 | 1118 | 1509 | 365 |
| Particles >6µm | ASTM D7647 | >1300 | 135 | 121 | 40 |
| Particles >14µm | ASTM D7647 | >160 | 8 | 8 | 3 |
| Particles >21µm | ASTM D7647 | >40 | 2 | 3 | 0 |
| Particles >38µm | ASTM D7647 | >10 | 0 | 0 | 0 |
| Particles >71µm | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | 17/14/10 | 18/14/10 | 16/12/9 |

OIL ANALYSIS REPORT

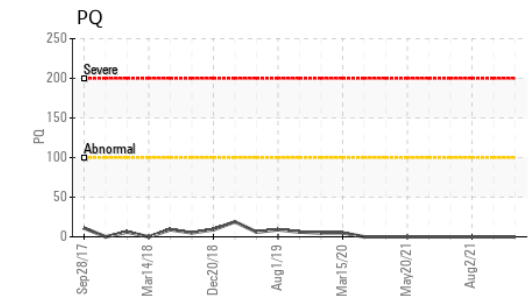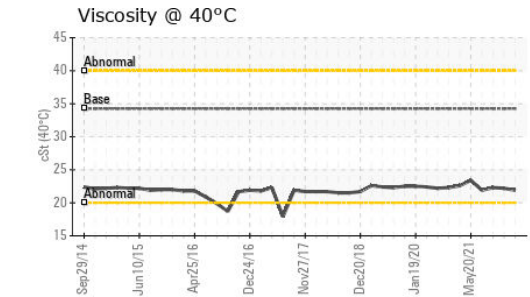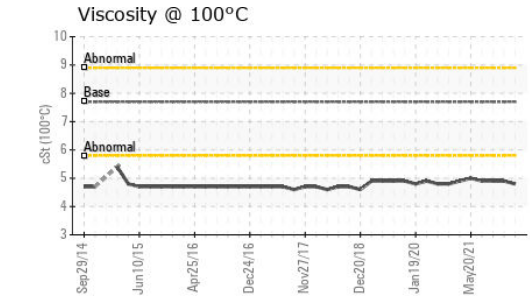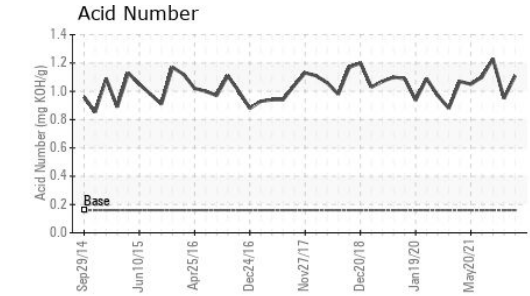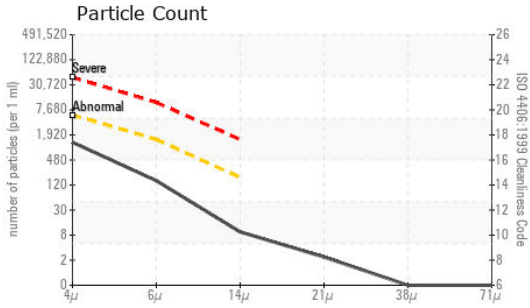


| FLUID DEGRADATION | | method | limit/base | current | history 1 | history 2 |
|-------------------|----------|------------|------------|-------------|-----------|-----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | 0.16 | 1.11 | 0.95 | 1.23 |

| VISUAL | | method | limit/base | current | history 1 | history 2 |
|------------------|--------|---------|------------|--------------|-----------|-----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.05 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history 1 | history 2 |
|----------------------|-------|---------------|------------|-------------|-----------|-----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 34.26 | 21.9 | 22.2 | 22.3 |
| Visc @ 100°C | cSt | ASTM D7279(m) | 7.7 | 4.8 | 4.9 | 4.9 |
| Viscosity Index (VI) | Scale | ASTM D2270* | 210 | 145 | 151 | 149 |

SAMPLE IMAGES

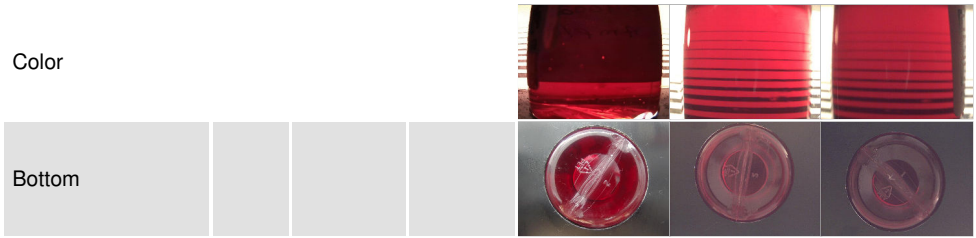

Color

Bottom



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0052189 **Received** : 06 Jul 2023
Lab Number : **02568260** **Diagnosed** : 07 Jul 2023
Unique Number : 5605306 **Diagnostician** : Kevin Marson
Test Package : MAR 2 (Additional Tests: KV100, PQ, TAN Man, VI)

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Strret
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.