




Area
EBI DE COSTA RICA
Machine Id
FREIGHTLINER 1512
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX AW 68 (--- GAL)

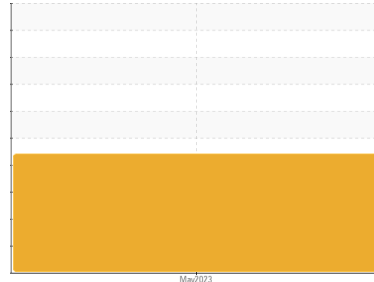

DIAGNOSIS

Recommendation

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0073934	---	---
Sample Date	Client Info	08 May 2023	---	---
Machine Age	hrs Client Info	60444	---	---
Oil Age	hrs Client Info	3267	---	---
Oil Changed	Client Info	Not Chngd	---	---
Sample Status		SEVERE	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185(m)	>20	6	---	---
Chromium ppm ASTM D5185(m)	>10	8	---	---
Nickel ppm ASTM D5185(m)	>10	0	---	---
Titanium ppm ASTM D5185(m)		0	---	---
Silver ppm ASTM D5185(m)		0	---	---
Aluminum ppm ASTM D5185(m)	>10	<1	---	---
Lead ppm ASTM D5185(m)	>10	0	---	---
Copper ppm ASTM D5185(m)	>75	<1	---	---
Tin ppm ASTM D5185(m)	>10	0	---	---
Antimony ppm ASTM D5185(m)		0	---	---
Vanadium ppm ASTM D5185(m)		0	---	---
Beryllium ppm ASTM D5185(m)		0	---	---
Cadmium ppm ASTM D5185(m)		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185(m)	0	<1	---	---
Barium ppm ASTM D5185(m)	0	0	---	---
Molybdenum ppm ASTM D5185(m)	0	0	---	---
Manganese ppm ASTM D5185(m)	0	0	---	---
Magnesium ppm ASTM D5185(m)	0	<1	---	---
Calcium ppm ASTM D5185(m)	50	49	---	---
Phosphorus ppm ASTM D5185(m)	330	332	---	---
Zinc ppm ASTM D5185(m)	430	400	---	---
Sulfur ppm ASTM D5185(m)	760	710	---	---
Lithium ppm ASTM D5185(m)		<1	---	---





CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185(m)	>20	2	---	---
Sodium ppm ASTM D5185(m)		<1	---	---
Potassium ppm ASTM D5185(m)	>20	<1	---	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	85340	---	---
Particles >6µm ASTM D7647	>1300	13636	---	---
Particles >14µm ASTM D7647	>160	262	---	---
Particles >21µm ASTM D7647	>40	62	---	---
Particles >38µm ASTM D7647	>10	1	---	---
Particles >71µm ASTM D7647	>3	0	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	24/21/15	---	---

OIL ANALYSIS REPORT

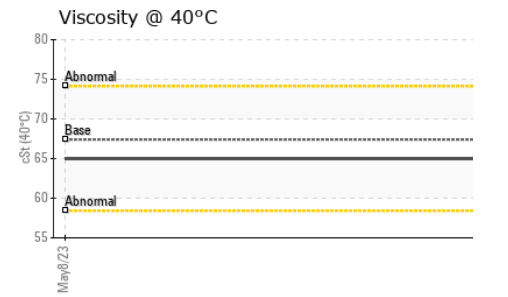
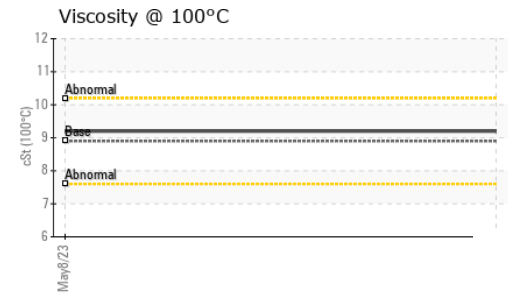
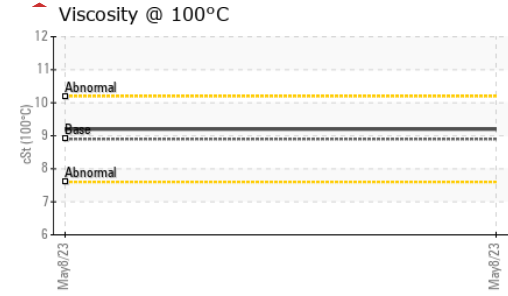
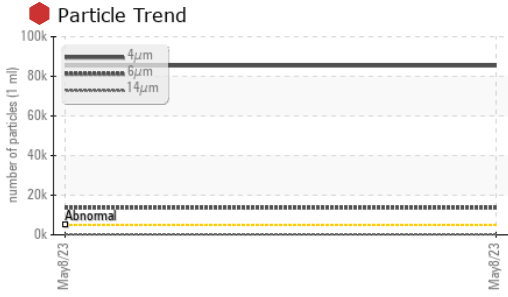


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

PARAMETER	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	67.4	65.0	---
Visc @ 100°C	cSt	ASTM D7279(m)	8.9	9.2	---
Viscosity Index (VI)	Scale	ASTM D2270*	105	118	---

PARAMETER	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

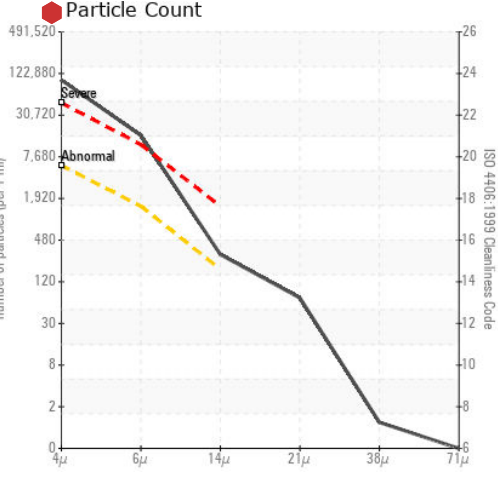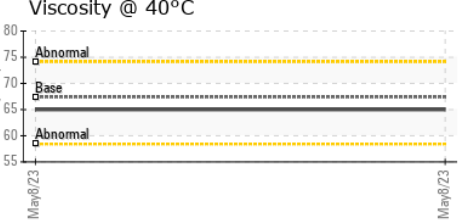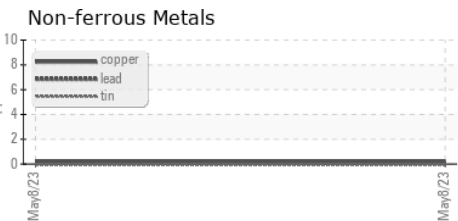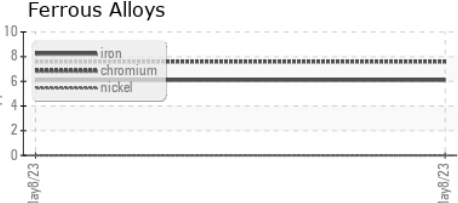

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **INDUSTRIAS del PETROLEO CANAD. SA**
Sample No. : PC0073934 **Received** : 06 Jul 2023 Contiguo FANAL, frente a la Autopista Bernardo Soto
Lab Number : 02568276 **Diagnosed** : 07 Jul 2023 Grecia, A
Unique Number : 5605322 **Diagnostician** : Wes Davis CR
Test Package : MOB 2 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.
 Contact: Ronald Sanchez
 rsanchez@lubricantescanada.com
 T:
 F: x: