



Machine Id  
**SANDVIK 19-03**

Component  
**New (Unused) Oil**

Fluid  
**PETRO CANADA ARDEE 150 (18 LTR)**

## DIAGNOSIS

### Recommendation

Il s'agit du relevé de base de cette huile neuve (inutilisée). Le fluide peut servir.

### Wear

{sans objet}

### Contamination

Il n'y a aucun indice de contamination dans le huile (inutilisée) neuve.

### Fluid Condition

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en l'utilisation.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PC0057463</b>	---	---
Sample Date	Client Info		<b>04 Jul 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Chromium	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >5	<b>2</b>	---	---
Aluminum	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Lead	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>0</b>	---	---
Barium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 350	<b>192</b>	---	---
Zinc	ppm	ASTM D5185(m) 200	<b>115</b>	---	---
Sulfur	ppm	ASTM D5185(m) 2400	<b>1202</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---




## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>0</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	<b>2.6</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	<b>12.2</b>	---	---

# OIL ANALYSIS REPORT

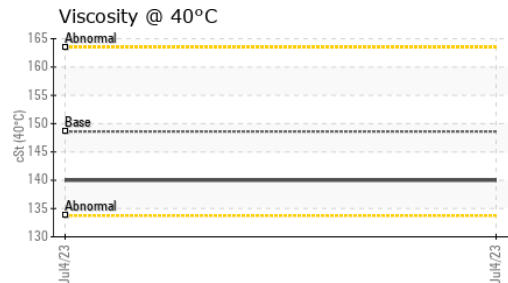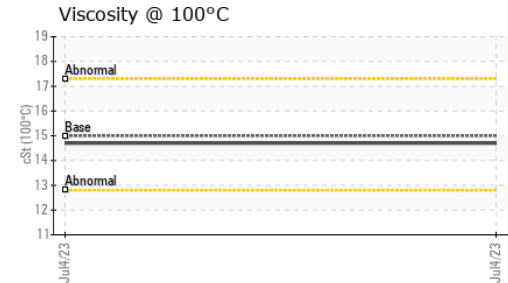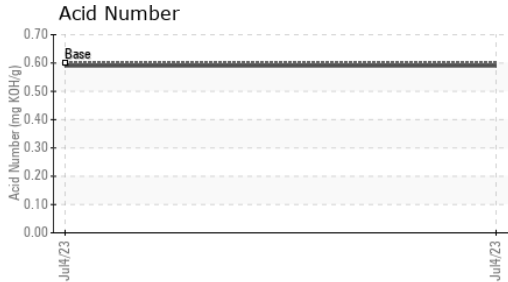



FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>138601</b>	---	---	
Particles >6µm	ASTM D7647	>1300	<b>54912</b>	---	---	
Particles >14µm	ASTM D7647	>160	<b>1639</b>	---	---	
Particles >21µm	ASTM D7647	>40	<b>90</b>	---	---	
Particles >38µm	ASTM D7647	>10	<b>1</b>	---	---	
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---	
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>24/23/18</b>	---	---	

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*		<b>4.2</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	0.60	<b>0.59</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*		<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	148.6	<b>140</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	<b>14.7</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	101	<b>104</b>	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0057463  
**Lab Number** : **02568786**  
**Unique Number** : 5605832  
**Test Package** : IND 2 ( Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, VI )

**DYNAMITAGE HARDROC INC**  
 2269 5RE RUE LEVIS  
 LEVIS, QC  
 CA G6W 5M6  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: