



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
{UNASSIGNED}
Machine Id
OR779
Component
Rear Left Final Drive
Fluid
PETRO CANADA TRAXON XL SYN BLEND 75W90 (8 LTR)



DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. Viscosity of sample indicates oil is within SAE 80W140 range, advise investigate. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0087398	---	---
Sample Date	Client Info	05 Jul 2023	---	---
Machine Age	hrs Client Info	16325	---	---
Oil Age	hrs Client Info	500	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		NORMAL	---	---

WEAR METALS

method	limit/base	current	history 1	history 2
Iron ppm ASTM D5185(m)	>800	144	---	---
Chromium ppm ASTM D5185(m)	>10	<1	---	---
Nickel ppm ASTM D5185(m)	>5	0	---	---
Titanium ppm ASTM D5185(m)	>15	1	---	---
Silver ppm ASTM D5185(m)	>2	0	---	---
Aluminum ppm ASTM D5185(m)	>75	17	---	---
Lead ppm ASTM D5185(m)	>10	0	---	---
Copper ppm ASTM D5185(m)	>75	<1	---	---
Tin ppm ASTM D5185(m)	>8	0	---	---
Antimony ppm ASTM D5185(m)	>50	0	---	---
Vanadium ppm ASTM D5185(m)		0	---	---
Beryllium ppm ASTM D5185(m)		0	---	---
Cadmium ppm ASTM D5185(m)		0	---	---

ADDITIVES

method	limit/base	current	history 1	history 2
Boron ppm ASTM D5185(m)	291	203	---	---
Barium ppm ASTM D5185(m)	1	0	---	---
Molybdenum ppm ASTM D5185(m)		<1	---	---
Manganese ppm ASTM D5185(m)		1	---	---
Magnesium ppm ASTM D5185(m)	1	10	---	---
Calcium ppm ASTM D5185(m)	1	171	---	---
Phosphorus ppm ASTM D5185(m)	1121	978	---	---
Zinc ppm ASTM D5185(m)	1	64	---	---
Sulfur ppm ASTM D5185(m)	20900	14501	---	---
Lithium ppm ASTM D5185(m)		<1	---	---

CONTAMINANTS



method	limit/base	current	history 1	history 2
Silicon ppm ASTM D5185(m)	>400	63	---	---
Sodium ppm ASTM D5185(m)		6	---	---
Potassium ppm ASTM D5185(m)	>20	7	---	---

VISUAL

method	limit/base	current	history 1	history 2
White Metal scalar Visual*	NONE	NONE	---	---
Yellow Metal scalar Visual*	NONE	NONE	---	---
Precipitate scalar Visual*	NONE	NONE	---	---
Silt scalar Visual*	NONE	NONE	---	---
Debris scalar Visual*	NONE	NONE	---	---
Sand/Dirt scalar Visual*	NONE	NONE	---	---
Appearance scalar Visual*	NORML	NORML	---	---
Odor scalar Visual*	NORML	NORML	---	---
Emulsified Water scalar Visual*	>0.2	NEG	---	---
Free Water scalar Visual*		NEG	---	---











OIL ANALYSIS REPORT

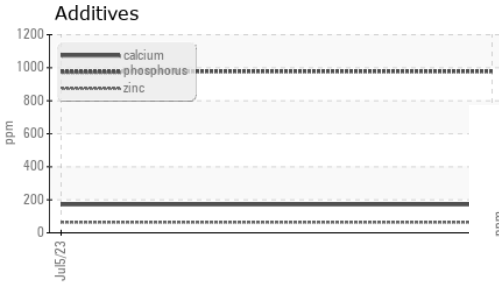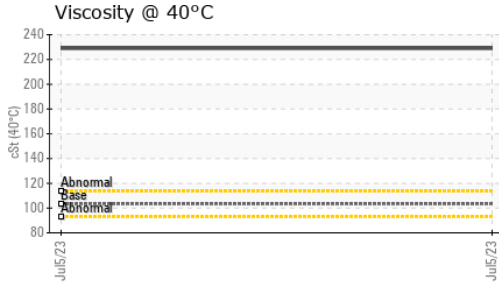

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D7279(m)	229	---	---

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
Color				no image	no image
Bottom				no image	no image

GRAPHS

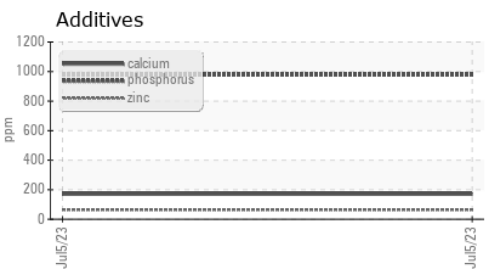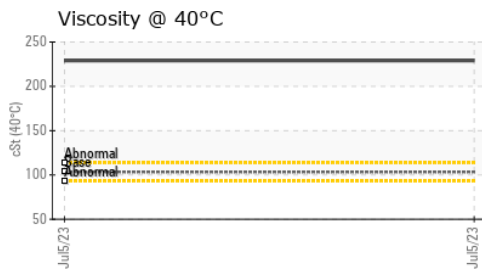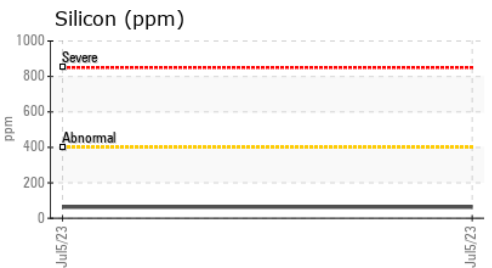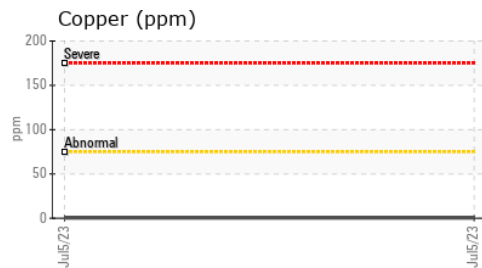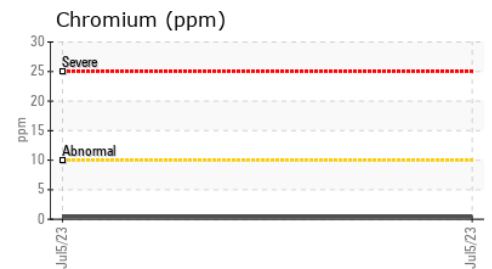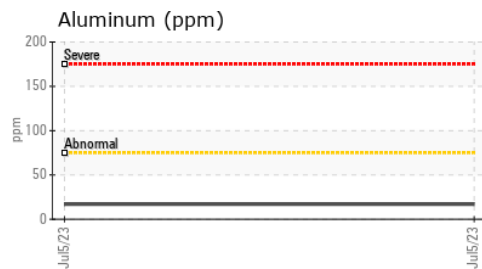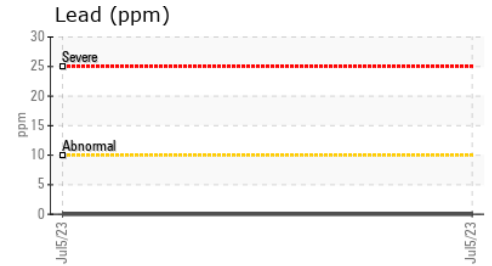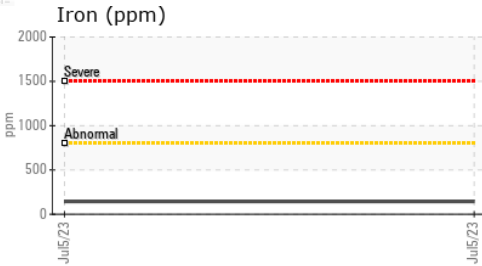

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 720 - Lafleche - Landfill
Sample No. : GFL0087398 **Received** : 10 Jul 2023
Lab Number : 02568848 **Diagnosed** : 10 Jul 2023
Unique Number : 5605894 **Diagnostician** : Kevin Marson
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

17125 Lafleche Road,
 Moose Creek, ON
 CA K0C 1W0
 Contact: Charles Bergeron
 cbergeron@gflenv.com
 T: (613)538-4853
 F: