


PROBLEM SUMMARY


Area
1460
Machine Id
1460-5666-4001 - HG Ni THICKENER MECH HPU
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX MV 36 (100 LTR)

Sample Rating Trend

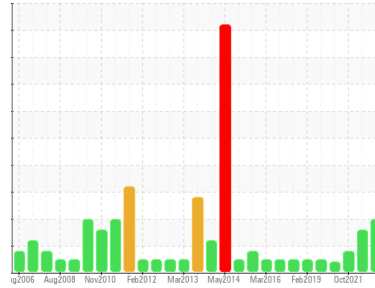

COMPONENT CONDITION SUMMARY

▲ Particle Trend

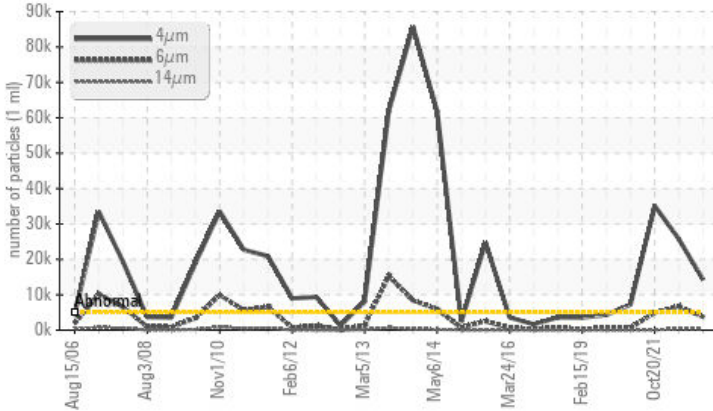

RECOMMENDATION

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>5000	▲ 14261	▲ 25768	▲ 35120
Particles >6µm	ASTM D7647	>1300	▲ 3761	▲ 6713	▲ 4933
Particles >14µm	ASTM D7647	>160	▲ 423	▲ 422	71
Particles >21µm	ASTM D7647	>40	▲ 139	▲ 79	17
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/19/16	▲ 22/20/16	▲ 22/19/13

Customer Id: INCVOS
Sample No.: PC0057970
Lab Number: 02568902
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

HISTORICAL DIAGNOSIS

10 Jan 2022 Diag: Kevin Marson

ISO



We recommend you service the filters on this component. We recommend an early resample to monitor this condition. All component wear rates are normal. Particles >14µm are abnormally high. Particles >4µm are abnormally high. Particles >6µm are abnormally high. Particles >21µm are notably high. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



20 Oct 2021 Diag: Wes Davis

ISO



We recommend you service the filters on this component. We recommend an early resample to monitor this condition. All component wear rates are normal. Particles >4µm are abnormally high. Particles >6µm are abnormally high. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



24 Jul 2020 Diag: Wes Davis

ISO




We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a light amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Area
1460
Machine Id
1460-5666-4001 - HG Ni THICKENER MECH HPU
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX MV 36 (100 LTR)

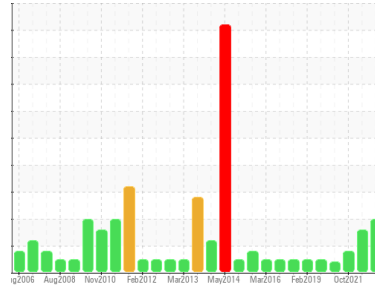

DIAGNOSIS

Recommendation
We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

Wear
All component wear rates are normal.

Contamination
There is a moderate amount of particulates (2 to 100 microns in size) present in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	PC0057970	PC0039890	PC0030023
Sample Date	Client Info	25 Jun 2023	10 Jan 2022	20 Oct 2021
Machine Age	mths	Client Info	0	0
Oil Age	mths	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history 1	history 2	
PQ	ASTM D8184*	0	---	---	
Iron	ppm	ASTM D5185(m) >20	<1	<1	1
Chromium	ppm	ASTM D5185(m) >20	0	0	0
Nickel	ppm	ASTM D5185(m) >20	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m)	0	0	0
Aluminum	ppm	ASTM D5185(m) >20	0	<1	<1
Lead	ppm	ASTM D5185(m) >20	0	<1	<1
Copper	ppm	ASTM D5185(m) >20	<1	<1	<1
Tin	ppm	ASTM D5185(m) >20	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history 1	history 2	
Boron	ppm	ASTM D5185(m) 0	<1	<1	<1
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 0	0	0	0
Manganese	ppm	ASTM D5185(m) 1	0	0	0
Magnesium	ppm	ASTM D5185(m) 0	<1	<1	<1
Calcium	ppm	ASTM D5185(m) 135	60	117	110
Phosphorus	ppm	ASTM D5185(m) 236	333	268	288
Zinc	ppm	ASTM D5185(m) 317	394	345	359
Sulfur	ppm	ASTM D5185(m) 561	881	635	650
Lithium	ppm	ASTM D5185(m)	<1	<1	<1






CONTAMINANTS

method	limit/base	current	history 1	history 2	
Silicon	ppm	ASTM D5185(m) >15	<1	0	<1
Sodium	ppm	ASTM D5185(m)	0	0	0
Potassium	ppm	ASTM D5185(m) >20	0	<1	<1

FLUID CLEANLINESS

method	limit/base	current	history 1	history 2	
Particles >4µm	ASTM D7647	>5000	▲ 14261	▲ 25768	▲ 35120
Particles >6µm	ASTM D7647	>1300	▲ 3761	▲ 6713	▲ 4933
Particles >14µm	ASTM D7647	>160	▲ 423	▲ 422	71
Particles >21µm	ASTM D7647	>40	▲ 139	▲ 79	17
Particles >38µm	ASTM D7647	>10	10	7	2
Particles >71µm	ASTM D7647	>3	1	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/19/16	▲ 22/20/16	▲ 22/19/13

OIL ANALYSIS REPORT

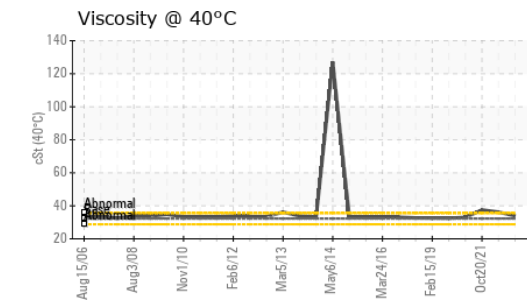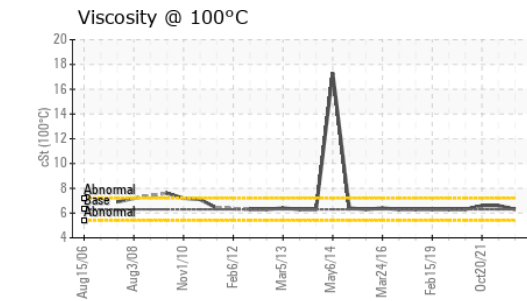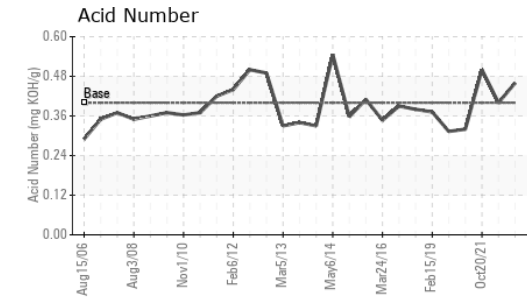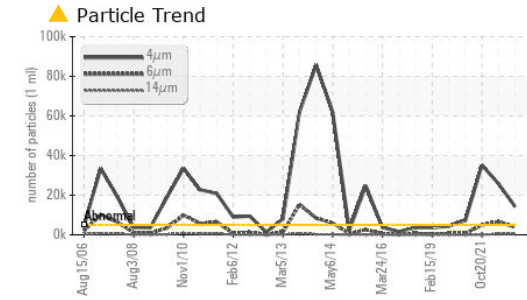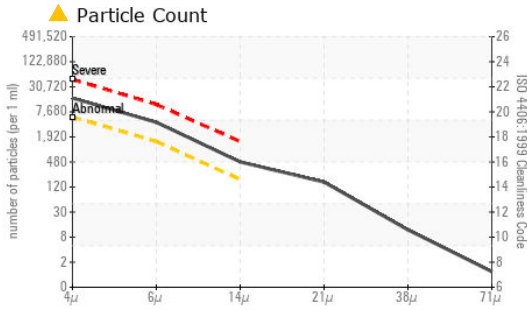

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0057970 **Received** : 10 Jul 2023
Lab Number : 02568902 **Diagnosed** : 12 Jul 2023
Unique Number : 5605948 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: KV100, PQ, TAN Man, VI)

Vale - Voisey's Bay
 Voisey's Bay Mine Site, P.O. Box 7001, Str. C Happy Valley
 Goose Bay, NL
 CA A0P 1C0
 Contact: Robert Feltham
 robert.feltham@vale.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FLUID DEGRADATION

method	limit/base	current	history 1	history 2	
Acid Number (AN) mg KOH/g	ASTM D974*	0.40	0.46	0.40	0.50

VISUAL

method	limit/base	current	history 1	history 2	
White Metal	scalar Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar Visual*	NONE	NONE	NONE	NONE
Silt	scalar Visual*	NONE	NONE	NONE	NONE
Debris	scalar Visual*	NONE	VLITE	VLITE	VLITE
Sand/Dirt	scalar Visual*	NONE	NONE	NONE	NONE
Appearance	scalar Visual*	NORML	NORML	NORML	NORML
Odor	scalar Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar Visual*		NEG	NEG	NEG

FLUID PROPERTIES

method	limit/base	current	history 1	history 2	
Visc @ 40°C	cSt ASTM D7279(m)	32.25	33.9	36.2	37.5
Visc @ 100°C	cSt ASTM D7279(m)	6.3	6.3	6.6	6.6
Viscosity Index (VI)	Scale ASTM D2270*	148	138	138	131

SAMPLE IMAGES

