




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

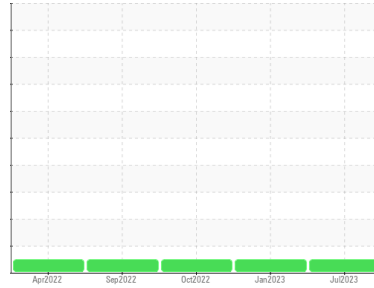

Machine Id
128047

Component
Diesel Engine

Fluid
PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		GFL0077590	GFL0063789	GFL0060237
Sample Date	Client Info		03 Jul 2023	02 Jan 2023	21 Oct 2022
Machine Age	kms	Client Info	271577	1221	259667
Oil Age	kms	Client Info	0	642	9298
Oil Changed	Client Info		N/A	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185(m) >100	32	15	9
Chromium	ppm	ASTM D5185(m) >20	2	1	<1
Nickel	ppm	ASTM D5185(m) >4	<1	<1	0
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m) >3	<1	0	0
Aluminum	ppm	ASTM D5185(m) >20	4	3	2
Lead	ppm	ASTM D5185(m) >40	<1	0	0
Copper	ppm	ASTM D5185(m) >330	4	3	<1
Tin	ppm	ASTM D5185(m) >15	0	<1	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m) 1	4	3	4
Barium	ppm	ASTM D5185(m) 1	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	71	61	60
Manganese	ppm	ASTM D5185(m) 1	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	1192	1025	990
Calcium	ppm	ASTM D5185(m) 1070	1325	1209	1139
Phosphorus	ppm	ASTM D5185(m) 1150	1220	1122	1083
Zinc	ppm	ASTM D5185(m) 1270	1453	1254	1196
Sulfur	ppm	ASTM D5185(m) 2060	2619	2650	2658
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m) >25	5	4	4
Sodium	ppm	ASTM D5185(m)	3	8	12
Potassium	ppm	ASTM D5185(m) >20	<1	0	0

INFRA-RED

	method	limit/base	current	history 1	history 2
Soot %	%	ASTM D7844* >3	0.2	0	0
Nitration	Abs/cm	ASTM D7624* >20	9.6	4.8	6.7
Sulfation	Abs./1mm	ASTM D7415* >30	22.9	16.4	20.4



OIL ANALYSIS REPORT







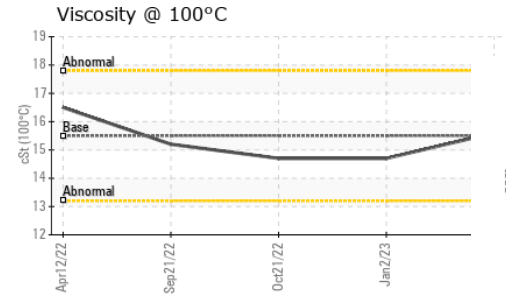
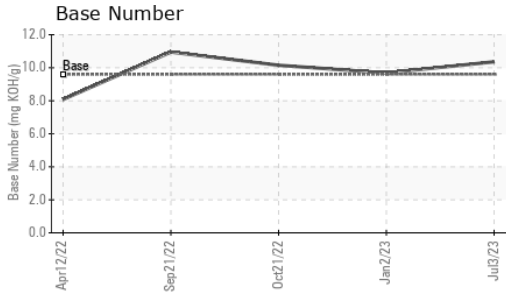


FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.8	9.8	16.0
Base Number (BN)	mg KOH/g	ASTM D2896*	9.6	10.36	9.68	10.15

VISUAL		method	limit/base	current	history 1	history 2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D7279(m)	15.5	15.6	14.7	14.7

GRAPHS

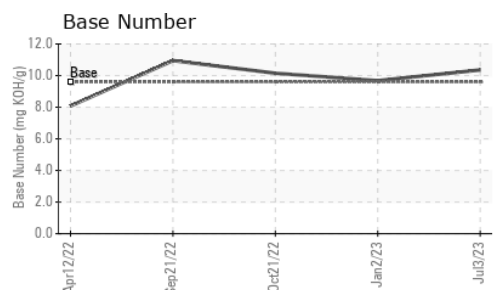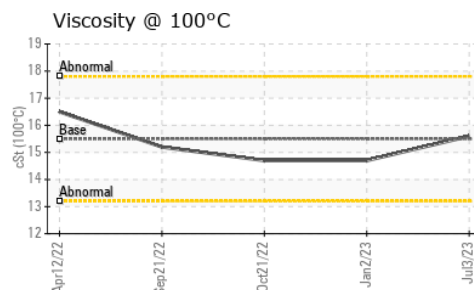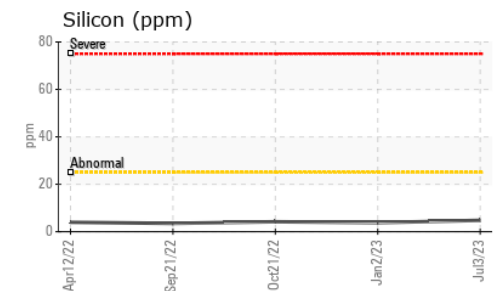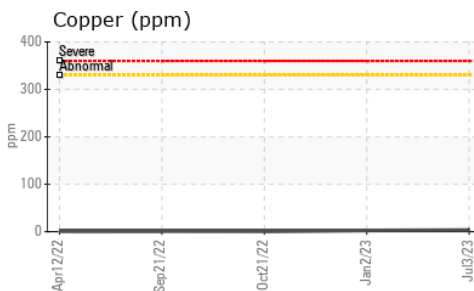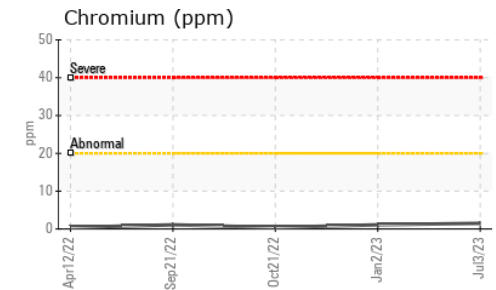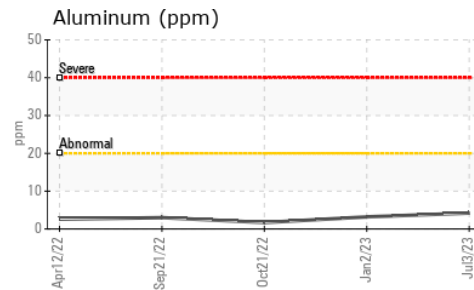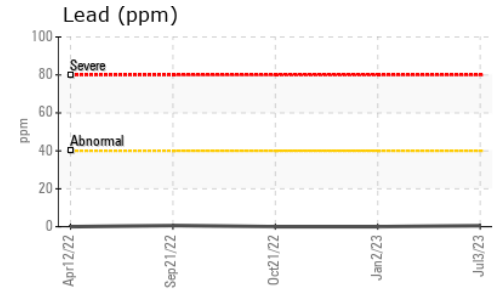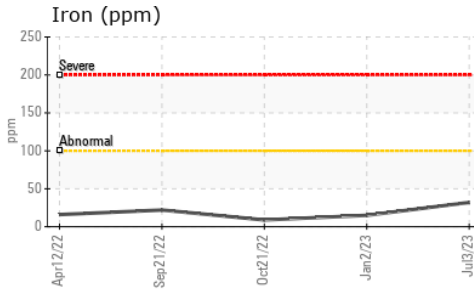

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 550 - Rocky View County
Sample No. : GFL0077590 **Received** : 11 Jul 2023
Lab Number : 02568983 **Diagnosed** : 11 Jul 2023
Unique Number : 5606029 **Diagnostician** : Wes Davis
Test Package : MOB 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

220 Carmek Blvd
 Rocky View County, AB
 CA T1X 1X1
 Contact: GFL Calgary
 calgarymaintenance@gflenv.com
 T:
 F: (403)369-6163