

OIL ANALYSIS REPORT

Sample Rating Trend **NORMAL**

ELION UI P40

Component

Hydraulic System

PETRO CANADA PURITY FG HYDRAULIC

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

AW 68 (415 LTR))			Mar2023		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
	VIATION		IIIIII Dasc			
Sample Number		Client Info		PC0030282		
Sample Date		Client Info		30 Mar 2023		
Machine Age	hrs	Client Info		59646		
Oil Age	hrs	Client Info		59646		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS	S	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	0		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		<1		
Phosphorus	ppm	ASTM D5185(m)		339		
Zinc	ppm	ASTM D5185(m)		14		
Sulfur	ppm	ASTM D5185(m)		442		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	TS	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m)	>15	<1		
Sodium	ppm	ASTM D5185(m)	710	1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID CLEANL	INESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647	>5000	34		
Particles >6µm		ASTM D7647	>1300	13		
Particles >14µm		ASTM D7647	>160	3		
Particles >21µm		ASTM D7647	>40	1		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	12/11/9		
FLUID DEGRAD					biotam t	biotom O
Acid Number (AN)		method	limit/base	current	history 1	history 2



OIL ANALYSIS REPORT

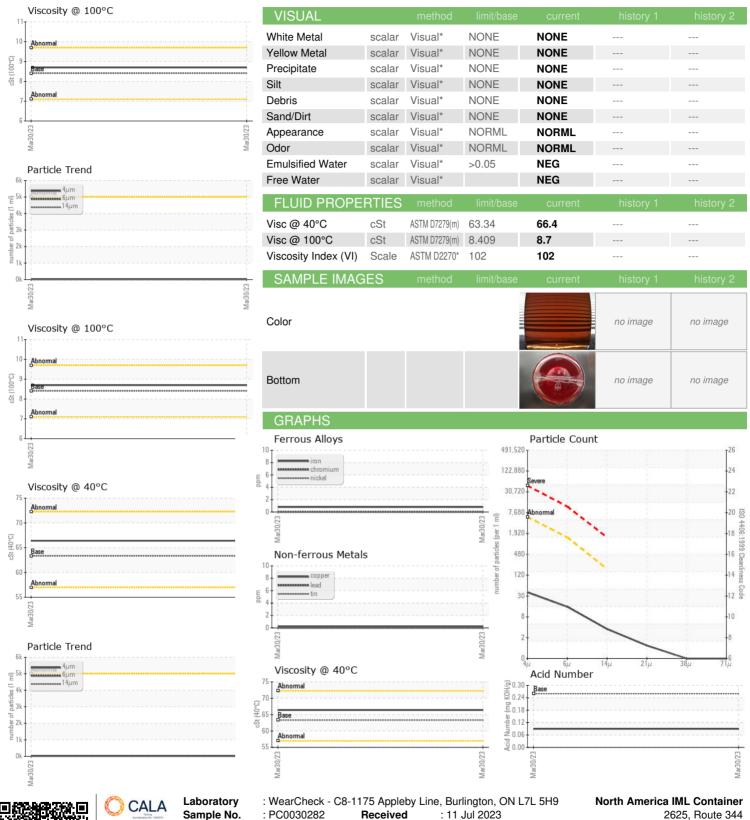



ISO 17025:2017 Accredited

Laboratory

Sample No. Lab Number **Unique Number**

: PC0030282

: 02569066

Diagnosed : 12 Jul 2023 : Wes Davis Diagnostician

: 5606112 Test Package : IND 2 (Additional Tests: KV100, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

2625, Route 344 St. Placide, QC **CA J0V 2B0**

Contact: Corinna Bouchard cbouchard@iml.ca T: (450)258-3130

F: (450)258-3345