


OIL ANALYSIS REPORT



NORMAL



Machine Id ELIOS U2-24

Component

Hydraulic System

PETRO CANADA PURITY FG HYDRAULIC

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

AW 68 (800 GAL)			Ap:2023			
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number		Client Info		PC0077161		
Sample Date		Client Info		05 Apr 2023		
Machine Age	hrs	Client Info		39607		
Oil Age	hrs	Client Info		0		
Oil Changed	1110	Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS	S	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)	720	0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	0		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)		<1		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)	720	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
	РРШ		::+/		la i a t a m . d	history O
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		3		
Phosphorus	ppm	ASTM D5185(m)		438		
Zinc	ppm	ASTM D5185(m)		8		
Sulfur	ppm	ASTM D5185(m)		666		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	TS	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m)	>15	1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID CLEANL	INESS	method	limit/base	current	history 1	history 2
Particles >4μm		ASTM D7647	>5000	215		
Particles >6µm		ASTM D7647	>1300	68		
Particles >14µm		ASTM D7647	>160	9		
Particles >21µm		ASTM D7647	>40	4		
Particles >38μm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/13/10		
FLUID DEGRAD	ATION	method	limit/base	current	history 1	history 2


Acid Number (AN)

mg KOH/g ASTM D974* 0.26

0.21



OIL ANALYSIS REPORT

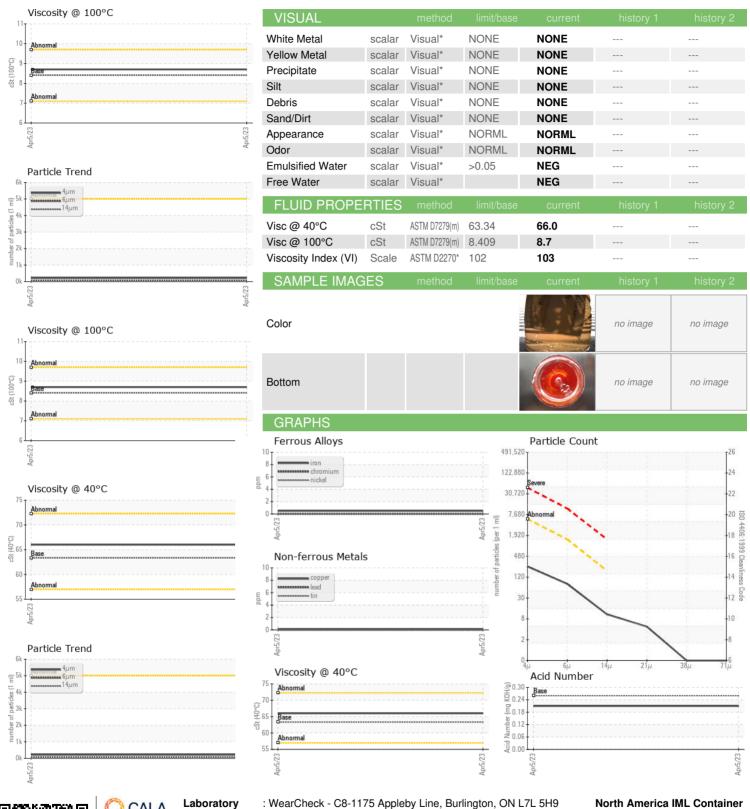



CALA ISO 17025:2017 Accredited

Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: PC0077161

: 02569121

: 5606167

Received : 11 Jul 2023 Diagnosed : 12 Jul 2023 Diagnostician : Wes Davis

Test Package : IND 2 (Additional Tests: KV100, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

2625, Route 344 St. Placide, QC **CA J0V 2B0**

Contact: Sebastien Brisson sbrisson@iml.ca

T: (450)258-2262 F: (450)258-3345