


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

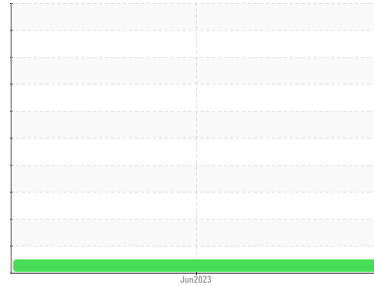

Machine Id
GMC 5

Component
Diesel Engine

Fluid
PETRO CANADA DURON UHP 5W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0073087	---	---
Sample Date	Client Info			13 Jun 2023	---	---
Machine Age	kms	Client Info		605173	---	---
Oil Age	kms	Client Info		11965	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	---	---
Glycol	WC Method			NEG	---	---




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	27	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)	>3	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	3	---	---
Copper	ppm	ASTM D5185(m)	>330	1	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	65	22	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	65	51	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	1160	968	---	---
Calcium	ppm	ASTM D5185(m)	820	1088	---	---
Phosphorus	ppm	ASTM D5185(m)	1160	1071	---	---
Zinc	ppm	ASTM D5185(m)	1260	1208	---	---
Sulfur	ppm	ASTM D5185(m)	3000	2764	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	6	---	---
Sodium	ppm	ASTM D5185(m)		9	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.6	---	---
Nitration	Abs/cm	ASTM D7624*	>20	12.6	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.0	---	---

OIL ANALYSIS REPORT






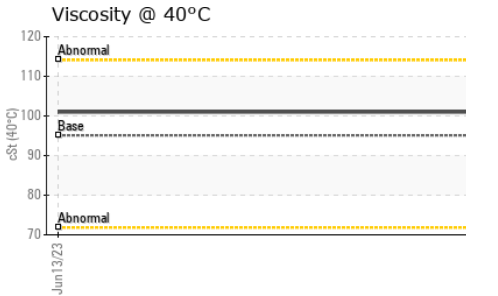
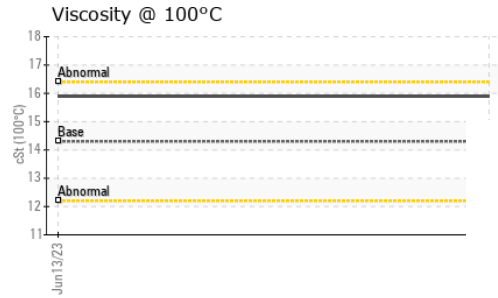
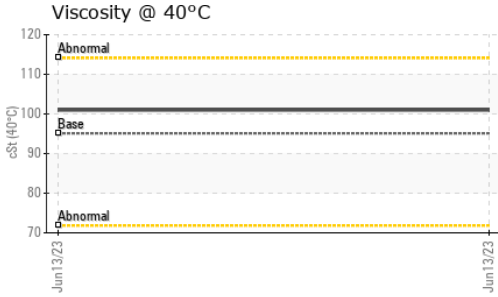


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	22.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*	11.0	8.45	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	95.1	101	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.3	15.9	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	169	168	---	---

GRAPHS

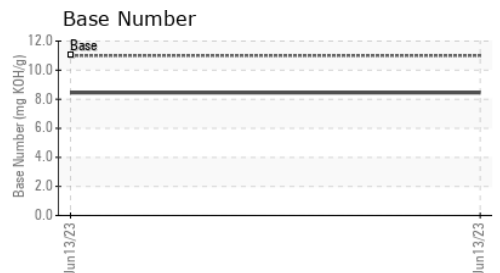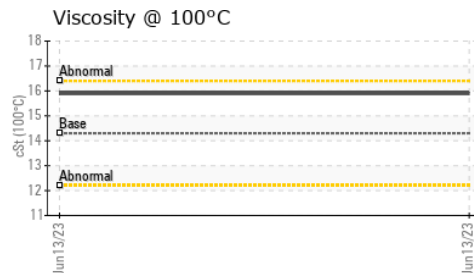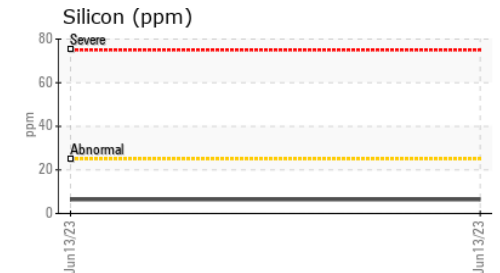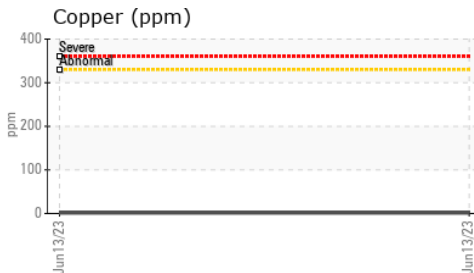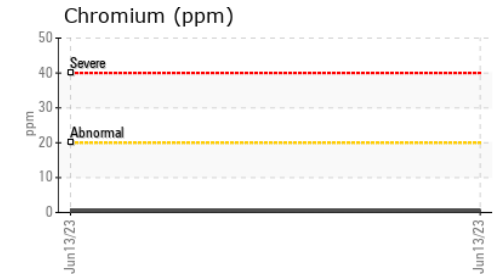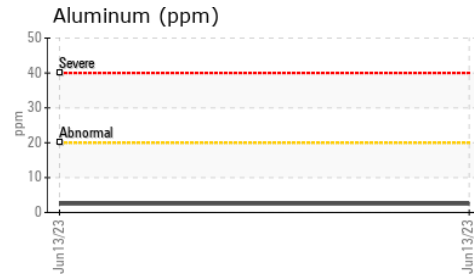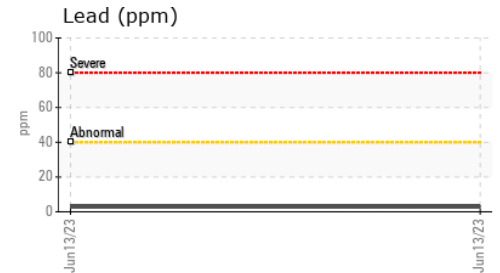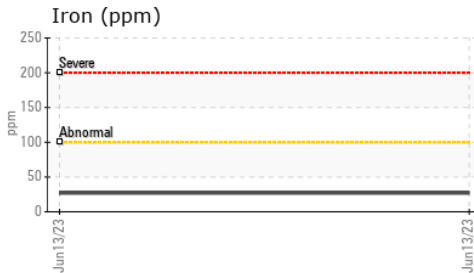

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0073087 **Received** : 12 Jul 2023
Lab Number : **02569223** **Diagnosed** : 13 Jul 2023
Unique Number : 5606269 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: KV40, TBN, VI)

BLUE GRASS COLONY
 BOX # 99
 WARNER, AB
 CA T0K 2L0
 Contact: Henry Wipl

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (403)642-2475
 F: (403)642-2479