


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id U1-22 Component **Hydraulic System**

PETRO CANADA PURITY FG HYDRAULIC

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

AW 68 (750 LTF		Mar2023				
SAMPLE INFOR	RMATIOI	N method	limit/base	current	history1	history2
Sample Number		Client Info		PC0062073		
Sample Date		Client Info		31 Mar 2023		
Machine Age	hrs	Client Info		63020		
Oil Age	hrs	Client Info		63020		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METAL	_S	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	<1		
Гitanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	0		
_ead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)		<1		
Γin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
/anadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES	PPIII	method	limit/base	current	history1	history2
			IIIIII/Dase		· ·	
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		<1		
Phosphorus	ppm	ASTM D5185(m)		420		
Zinc	ppm	ASTM D5185(m)		5		
Sulfur	ppm	ASTM D5185(m)		410		
_ithium	ppm	ASTM D5185(m)		<1		
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<1		
Sodium	ppm	ASTM D5185(m)		0		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID CLEAN	ILINES	S method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	279		
Particles >6µm		ASTM D7647	>1300	65		
Particles >14µm		ASTM D7647	>160	9		
Particles >21µm		ASTM D7647	>40	3		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/13/10		
FLUID DEGRA	IOITAD.	N method	limit/base	current	history1	history2

0.13



OIL ANALYSIS REPORT

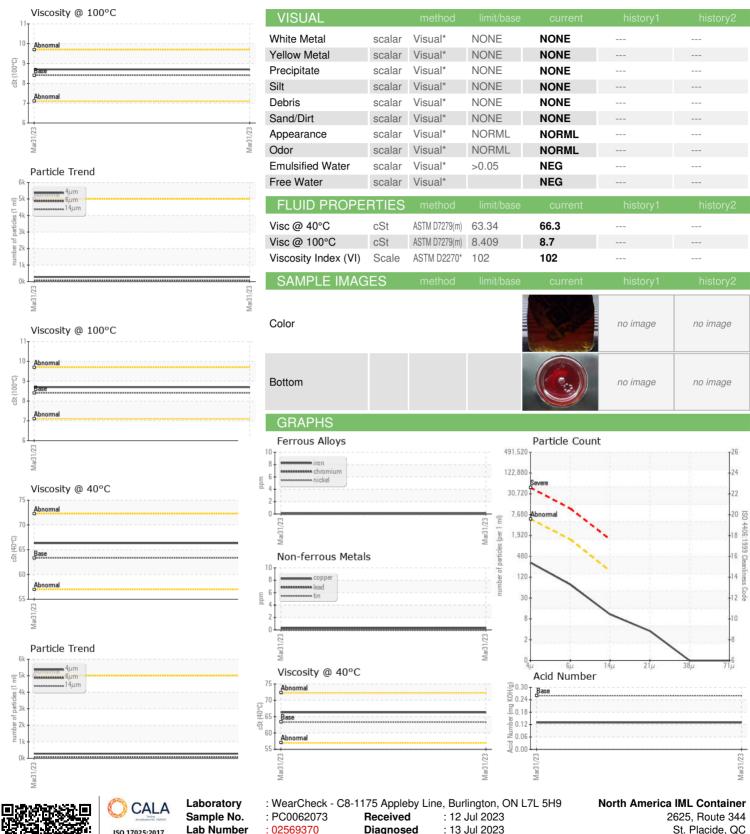



ISO 17025:2017 Accredited

Laboratory

Lab Number **Unique Number**

Diagnosed : 5606416

: Wes Davis Diagnostician

Test Package : IND 2 (Additional Tests: KV100, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

St. Placide, QC **CA J0V 2B0**

Contact: Corinna Bouchard cbouchard@iml.ca T: (450)258-3130

F: (450)258-3345