

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**CRUSHER CONE 19-512573**

Component  
**Gearbox**

Fluid  
**GEAR OIL ISO 220 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0073139</b>	---	---
Sample Date	Client Info			<b>03 Jul 2023</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	<b>19</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>3</b>	---	---
Lead	ppm	ASTM D5185(m)	>50	<b>15</b>	---	---
Copper	ppm	ASTM D5185(m)	>200	<b>45</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>4</b>	---	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	50	<b>33</b>	---	---
Barium	ppm	ASTM D5185(m)	15	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	15	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	50	<b>3</b>	---	---
Calcium	ppm	ASTM D5185(m)	50	<b>17</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	350	<b>379</b>	---	---
Zinc	ppm	ASTM D5185(m)	100	<b>7</b>	---	---
Sulfur	ppm	ASTM D5185(m)	12500	<b>4809</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>29</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---







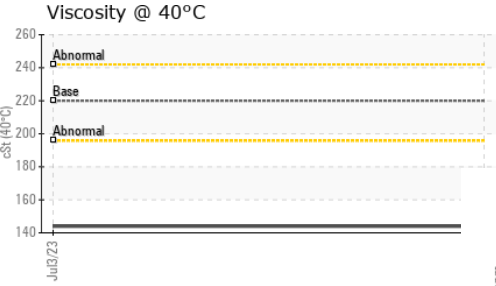
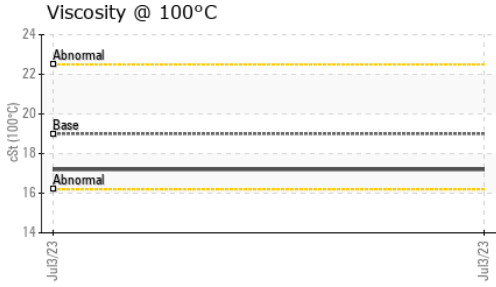
# OIL ANALYSIS REPORT



FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	220	<b>144</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	19.0	<b>17.2</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	96	<b>130</b>	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				no image	no image	
Bottom				no image	no image	

## GRAPHS

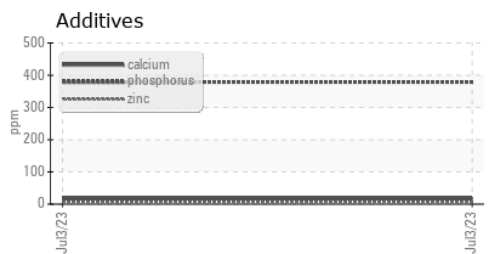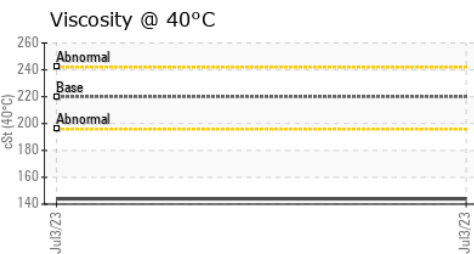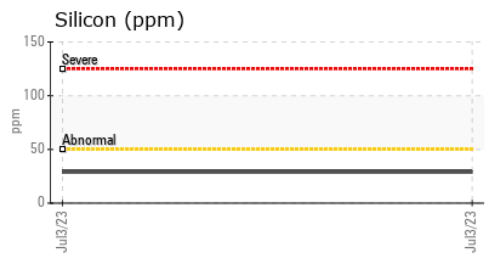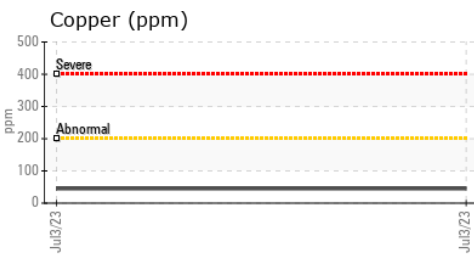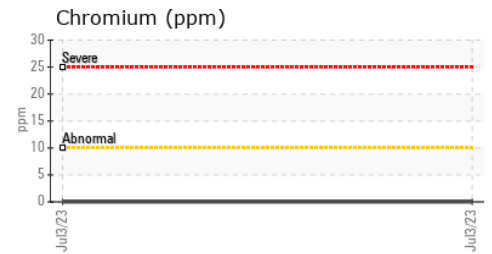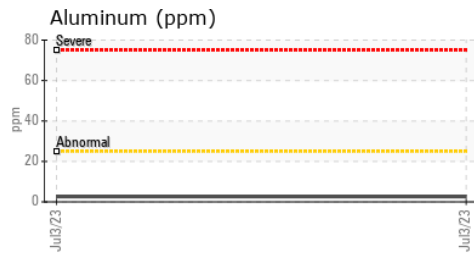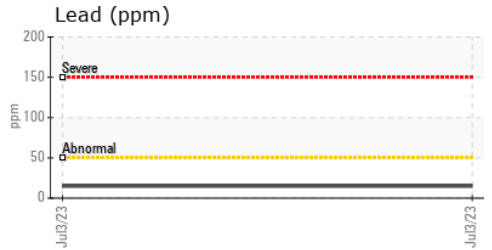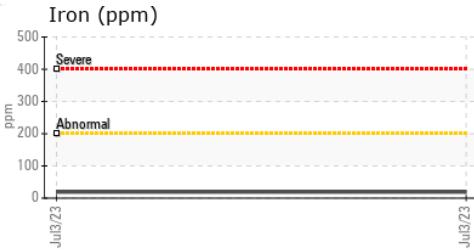

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0073139 **Received** : 12 Jul 2023  
**Lab Number** : 02569457 **Diagnosed** : 13 Jul 2023  
**Unique Number** : 5606503 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )

**JEPSON PETROLEUM**  
 3240 2ND AVE N  
 LETHBRIDGE, AB  
 CA T1H 0C6  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: