




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

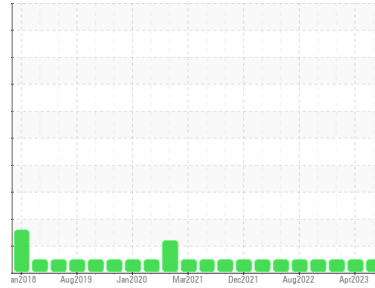

Machine Id
701043

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0077317	GFL0070432	GFL0059871
Sample Date	Client Info	11 Jul 2023	25 Apr 2023	02 Feb 2023
Machine Age	hrs	602	602	0
Oil Age	hrs	602	602	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	14	15	21
Chromium	ppm ASTM D5185(m) >20	<1	<1	<1
Nickel	ppm ASTM D5185(m) >4	0	<1	<1
Titanium	ppm ASTM D5185(m)	0	0	<1
Silver	ppm ASTM D5185(m) >3	0	0	0
Aluminum	ppm ASTM D5185(m) >20	2	1	2
Lead	ppm ASTM D5185(m) >40	<1	0	0
Copper	ppm ASTM D5185(m) >330	<1	<1	<1
Tin	ppm ASTM D5185(m) >15	0	0	0
Antimony	ppm ASTM D5185(m)	0	<1	<1
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	2	2	2
Barium	ppm ASTM D5185(m) 0	0	0	0
Molybdenum	ppm ASTM D5185(m) 60	57	57	59
Manganese	ppm ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm ASTM D5185(m) 1010	952	940	957
Calcium	ppm ASTM D5185(m) 1070	1013	1095	1109
Phosphorus	ppm ASTM D5185(m) 1150	1012	1033	1046
Zinc	ppm ASTM D5185(m) 1270	1181	1179	1199
Sulfur	ppm ASTM D5185(m) 2060	2341	2460	2507
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	4	4	4
Sodium	ppm ASTM D5185(m)	2	1	2
Potassium	ppm ASTM D5185(m) >20	2	1	2

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0.3	0.3	0.2
Nitration	Abs/cm ASTM D7624* >20	10.0	9.7	9.0
Sulfation	Abs/.1mm ASTM D7415* >30	21.2	20.7	20.9

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414* >25	18.0	17.7	16.1











OIL ANALYSIS REPORT

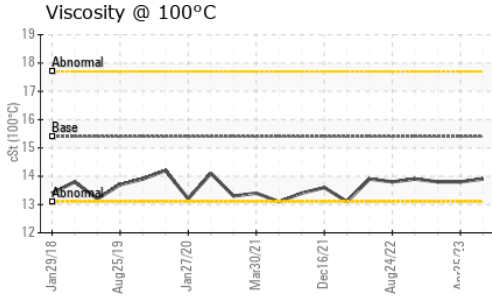

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.9	13.8

GRAPHS

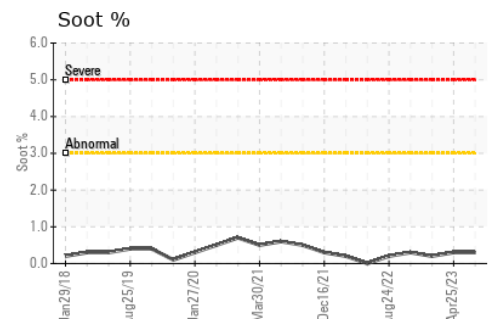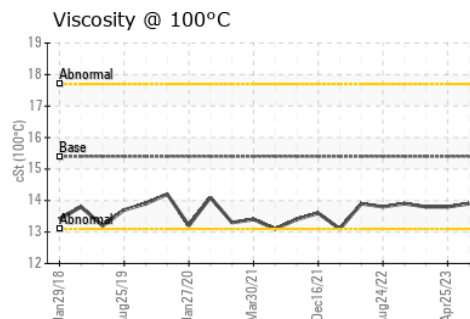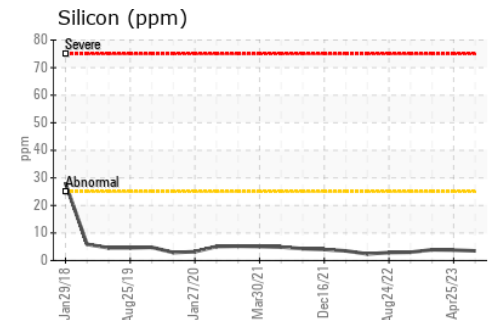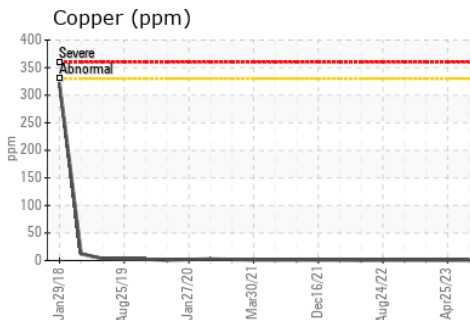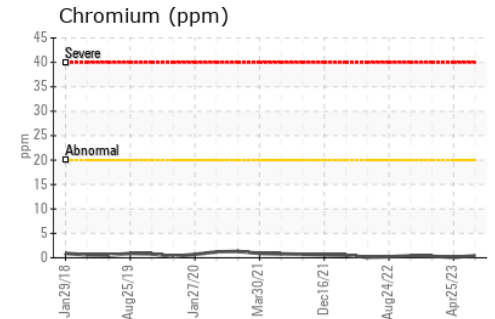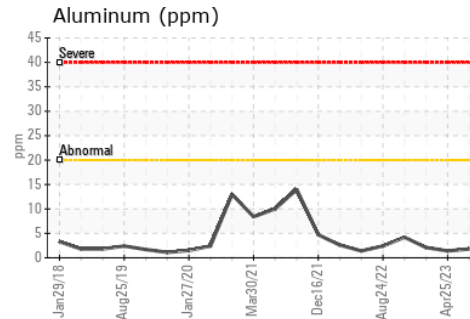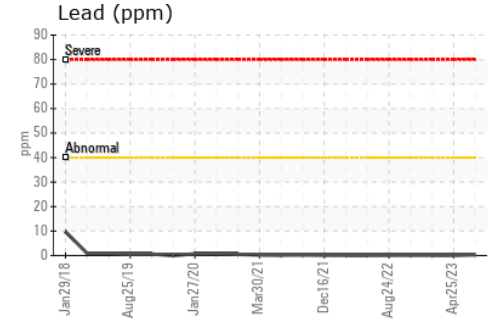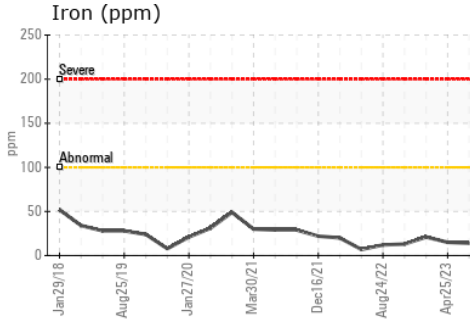

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 221 - Windsor**
Sample No. : GFL0077317 **Received** : 13 Jul 2023
Lab Number : 02569535 **Diagnosed** : 13 Jul 2023
Unique Number : 5606581 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Rhys Marotte
 rmarotte@gflenv.com

T:
F: