

Machine Id


**U67**

Component

**Transmission**

Fluid

**PETRO CANADA ENDURATEX XL 68/220 (--- LTR)**

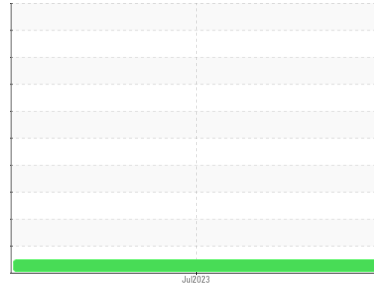

## DIAGNOSIS

### Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque et le modèle du composant lors du prochain échantillon.

### Wear

Les taux d'usure de tous les composants sont normaux.

### Contamination

Il n'y a aucun indice de contamination dans le fluide.

### Fluid Condition

Le AN est acceptable pour ce fluide. L'état de le fluide permet d'en prolonger l'utilisation.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PC0073947</b>	---	---
Sample Date	Client Info		<b>12 Jul 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	<b>12</b>	---
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	---
Nickel	ppm	ASTM D5185(m)		<b>0</b>	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---
Aluminum	ppm	ASTM D5185(m)	>50	<b>2</b>	---
Lead	ppm	ASTM D5185(m)	>50	<b>&lt;1</b>	---
Copper	ppm	ASTM D5185(m)	>200	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>108</b>	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---
Magnesium	ppm	ASTM D5185(m)		<b>2</b>	---
Calcium	ppm	ASTM D5185(m)		<b>9</b>	---
Phosphorus	ppm	ASTM D5185(m)	240	<b>492</b>	---
Zinc	ppm	ASTM D5185(m)		<b>10</b>	---
Sulfur	ppm	ASTM D5185(m)	4060	<b>8029</b>	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---




## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>22</b>	---
Sodium	ppm	ASTM D5185(m)		<b>2</b>	---
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.9	<b>0.76</b>	---

# OIL ANALYSIS REPORT





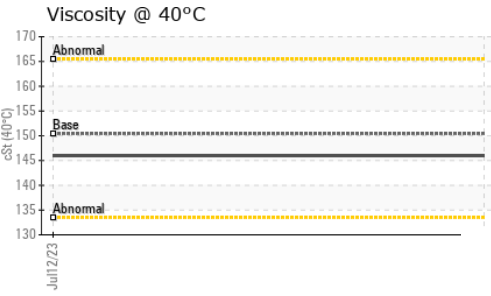
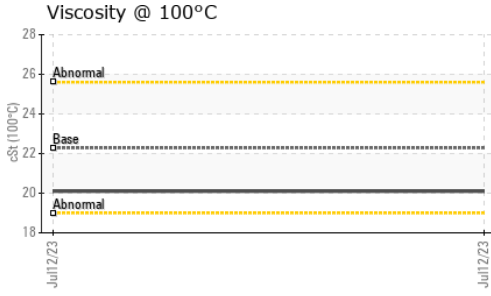
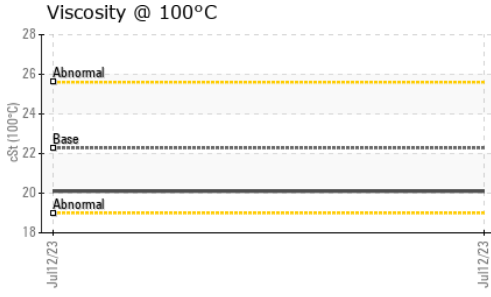


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	---
Free Water	scalar	Visual*		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	150.4	<b>146</b>	---
Visc @ 100°C	cSt	ASTM D7279(m)	22.28	<b>20.1</b>	---
Viscosity Index (VI)	Scale	ASTM D2270*	176	<b>159</b>	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

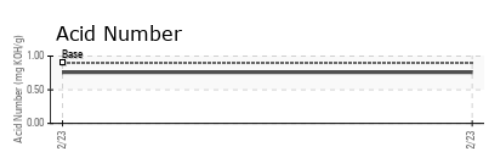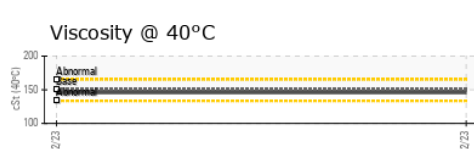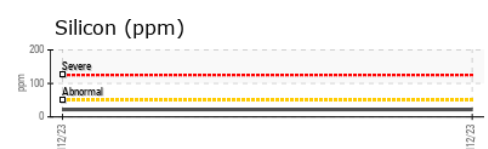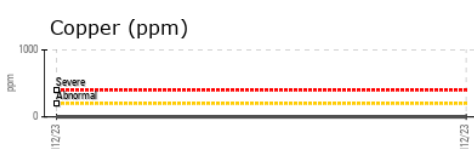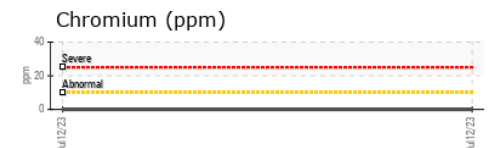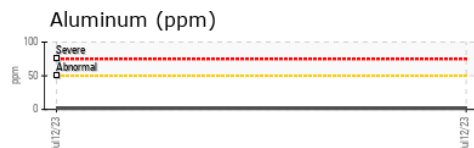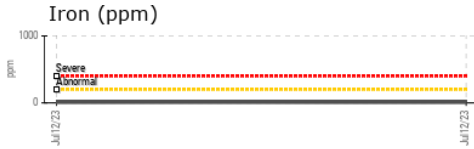

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0073947 **Received** : 13 Jul 2023  
**Lab Number** : **02569762** **Diagnosed** : 13 Jul 2023  
**Unique Number** : 5606808 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KV100, TAN Man, VI )

**Bauval Pavages Varennes**  
 3350 Rang de la Butte  
 Varennes, QC  
 CA J3X 1P7  
 Contact: Anne Godefroid  
 agodefroid@bauval.com  
 T: (450)652-9818  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.