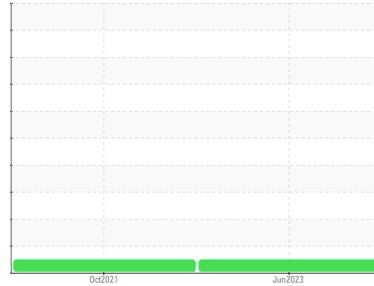


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
EBI DE COSTA RICA
Machine Id
VOLVO A30F A30F04A1
Component
Right Final Drive
Fluid
PETRO CANADA TRAXON 80W90 (38 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0073823	PC0049470	---
Sample Date	Client Info		05 Jun 2023	20 Oct 2021	---
Machine Age	hrs	Client Info	15000	12241	---
Oil Age	hrs	Client Info	500	500	---
Oil Changed	Client Info		Changed	N/A	---
Sample Status			NORMAL	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >900	55	64	---
Chromium	ppm	ASTM D5185(m) >20	<1	<1	---
Nickel	ppm	ASTM D5185(m) >10	<1	<1	---
Titanium	ppm	ASTM D5185(m)	<1	0	---
Silver	ppm	ASTM D5185(m)	0	<1	---
Aluminum	ppm	ASTM D5185(m) >30	<1	<1	---
Lead	ppm	ASTM D5185(m) >50	<1	<1	---
Copper	ppm	ASTM D5185(m) >150	3	4	---
Tin	ppm	ASTM D5185(m) >20	0	<1	---
Antimony	ppm	ASTM D5185(m) >5	0	<1	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 243	254	260	---
Barium	ppm	ASTM D5185(m) 1	0	0	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---
Manganese	ppm	ASTM D5185(m)	<1	<1	---
Magnesium	ppm	ASTM D5185(m) 2	1	<1	---
Calcium	ppm	ASTM D5185(m) 6	9	41	---
Phosphorus	ppm	ASTM D5185(m) 987	1097	1364	---
Zinc	ppm	ASTM D5185(m) 1	9	22	---
Sulfur	ppm	ASTM D5185(m) 21530	18685	24008	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

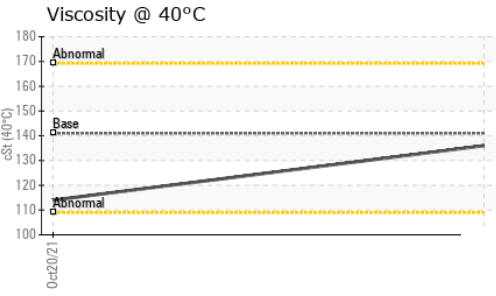
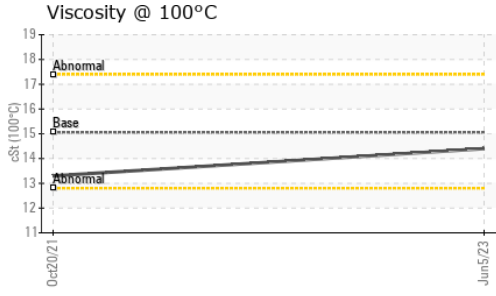
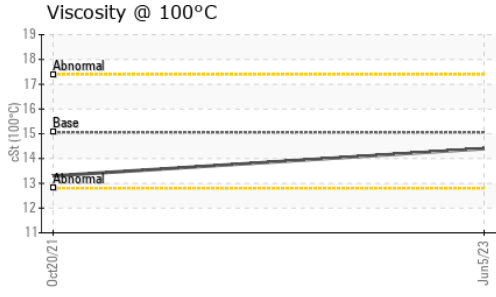
CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	4	4	---
Sodium	ppm	ASTM D5185(m)	<1	<1	---
Potassium	ppm	ASTM D5185(m) >20	<1	<1	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 1.9	1.53	1.38	---

OIL ANALYSIS REPORT





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---



FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	141.0	136	114	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.06	14.4	13.3	---
Viscosity Index (VI)	Scale	ASTM D2270*	108	104	112	---

SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color					
Bottom					

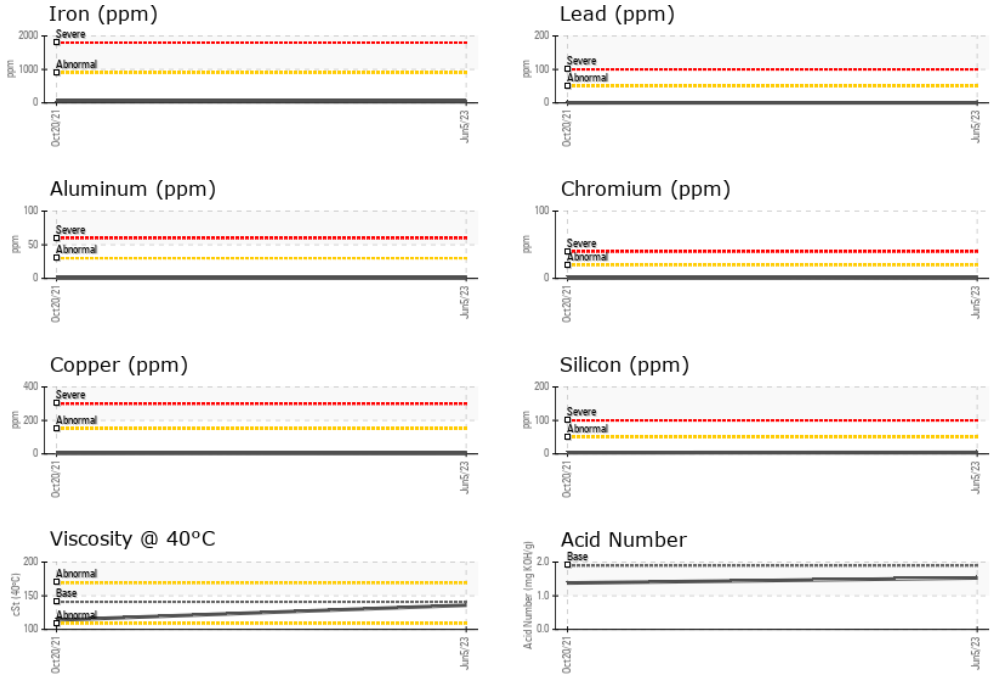



no image

no image

GRAPHS



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **INDUSTRIAS del PETROLEO CANAD. SA**
Sample No. : PC0073823 **Received** : 13 Jul 2023 Contiguo FANAL, frente a la Autopista Bernardo Soto
Lab Number : 02569791 **Diagnosed** : 13 Jul 2023 Grecia, A
Unique Number : 5606837 **Diagnostician** : Wes Davis CR
Test Package : MOB 2 (Additional Tests: KV100, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131. **Contact: Erick Bogantes**
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. **cotizaciones@lubricantescanada.com**
 Validity of results and interpretation are based on the sample and information as supplied. **T: 1(115)062-1598**
F: 1(115)062-2870