




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

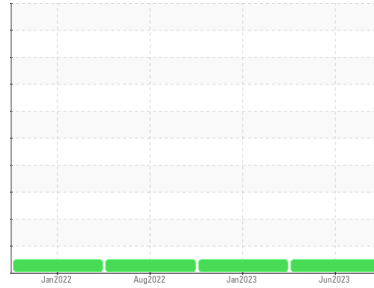

Machine Id
801137
 Component
Transmission (Auto)
 Fluid
ALLISON TES 295 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0057428	GFL0063607	GFL0050505	
Sample Date	Client Info	08 Jun 2023	24 Jan 2023	09 Aug 2022	
Machine Age	hrs	Client Info	174766	15712	14658
Oil Age	hrs	Client Info	600	600	1200
Oil Changed	Client Info	Changed	Changed	Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >160	45	37	31
Chromium	ppm	ASTM D5185(m) >5	<1	0	0
Nickel	ppm	ASTM D5185(m) >5	0	<1	<1
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m) >5	0	0	0
Aluminum	ppm	ASTM D5185(m) >50	13	10	8
Lead	ppm	ASTM D5185(m) >50	4	4	3
Copper	ppm	ASTM D5185(m) >225	10	9	8
Tin	ppm	ASTM D5185(m) >10	1	1	<1
Antimony	ppm	ASTM D5185(m)	0	<1	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 150	93	97	99
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 0	0	0	0
Manganese	ppm	ASTM D5185(m)	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 0	<1	<1	<1
Calcium	ppm	ASTM D5185(m) 40	113	115	114
Phosphorus	ppm	ASTM D5185(m) 320	292	292	262
Zinc	ppm	ASTM D5185(m) 5	5	3	3
Sulfur	ppm	ASTM D5185(m) 1050	1588	1610	1625
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >20	5	5	4
Sodium	ppm	ASTM D5185(m)	6	5	4
Potassium	ppm	ASTM D5185(m) >20	3	2	2

VISUAL

method	limit/base	current	history1	history2		
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG




OIL ANALYSIS REPORT









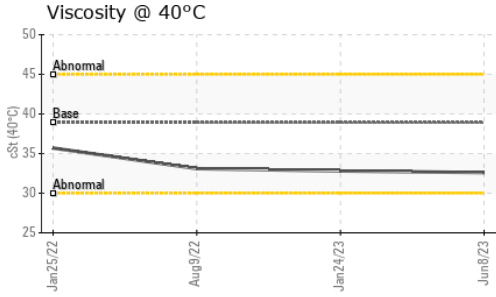


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	38.9	32.6	32.8	33.1

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

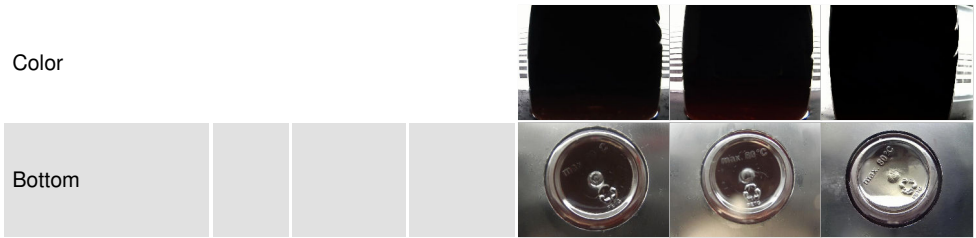

GRAPHS

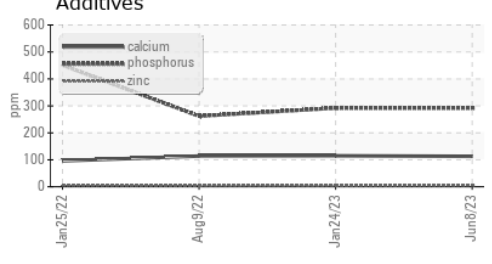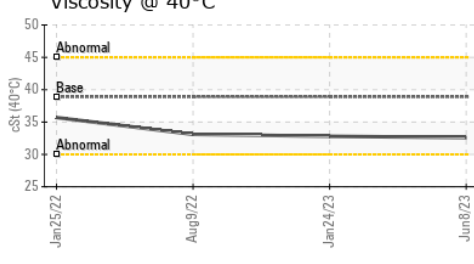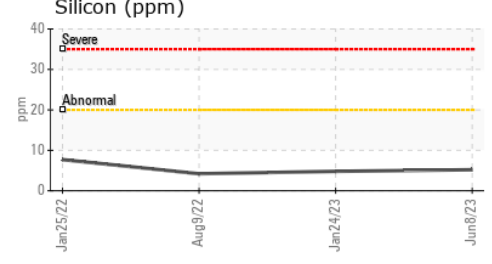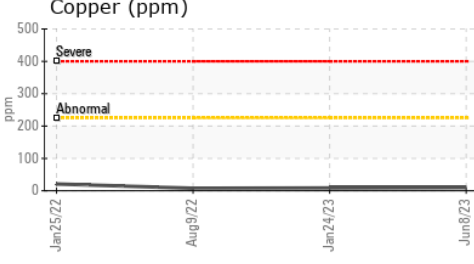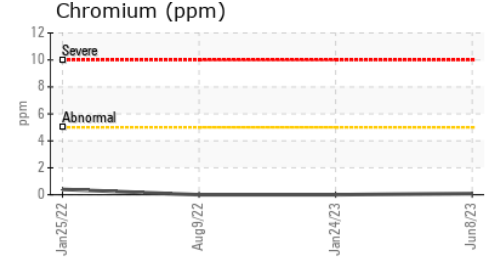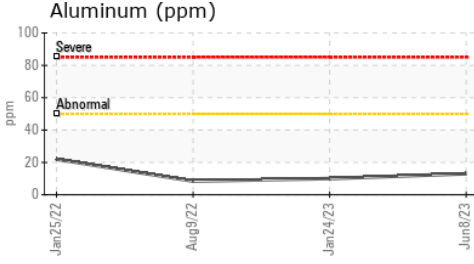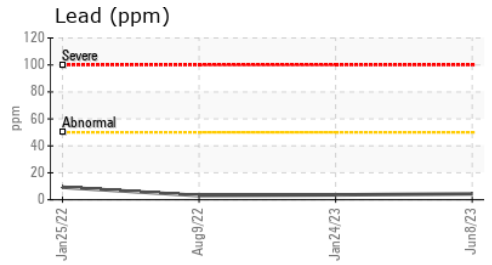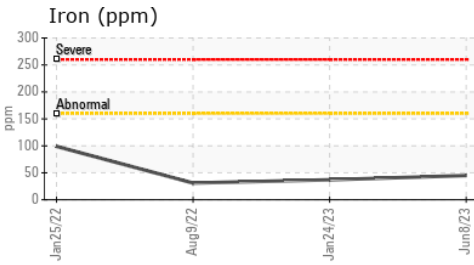

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 574 - Vancouver Fleet
Sample No. : GFL0057428 **Received** : 14 Jul 2023
Lab Number : 02570169 **Diagnosed** : 14 Jul 2023
Unique Number : 5607215 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

70 Golden Drive,
 Coquitlam, BC
 CA V3K 6B5
 Contact: Allison Adams
 aadams@gflenv.com
 T: (604)529-4023
 F: