

Machine Id  
**8029**  
Component  
**Front Diesel Engine**  
Fluid  
**PETRO CANADA DURON HP 15W40 (35 LTR)**

**DIAGNOSIS**

**Recommendation**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

**Wear**

Les taux d'usure de tous les composants sont normaux.

**Contamination**

Il n'y a aucun indice de contamination dans l'huile.

**Fluid Condition**

Le résultat pour le BN indique que la réserve d'alcalinité est acceptable pour l'huile. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0073964</b>	PC0063935	PC0050299
Sample Date	Client Info			<b>03 Jul 2023</b>	04 Aug 2022	19 Aug 2021
Machine Age	kms	Client Info		<b>0</b>	0	0
Oil Age	kms	Client Info		<b>5121</b>	163993	58677
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<b>&lt;1.0</b>	1.6	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>41</b>	39	36
Chromium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>3</b>	3	3
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>6</b>	5	5
Lead	ppm	ASTM D5185(m)	>40	<b>2</b>	2	3
Copper	ppm	ASTM D5185(m)	>330	<b>5</b>	6	6
Tin	ppm	ASTM D5185(m)	>15	<b>1</b>	1	2
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	1	1
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>60</b>	55	61
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>1007</b>	917	1037
Calcium	ppm	ASTM D5185(m)	1070	<b>1104</b>	1099	1075
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1024</b>	993	1068
Zinc	ppm	ASTM D5185(m)	1270	<b>1226</b>	1172	1267
Sulfur	ppm	ASTM D5185(m)	2060	<b>1911</b>	1811	1953
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>11</b>	10	6
Sodium	ppm	ASTM D5185(m)		<b>11</b>	13	10
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	2	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.4</b>	0.4	0.4
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.6</b>	12.7	11.0
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>24.9</b>	25.1	24.1

# OIL ANALYSIS REPORT






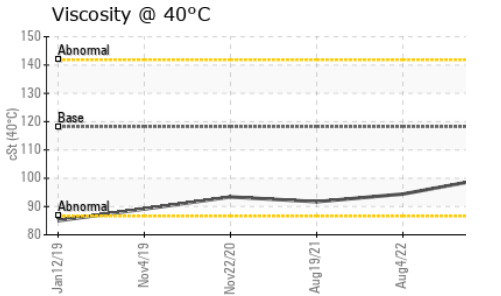
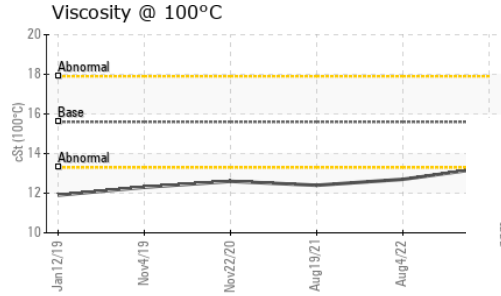
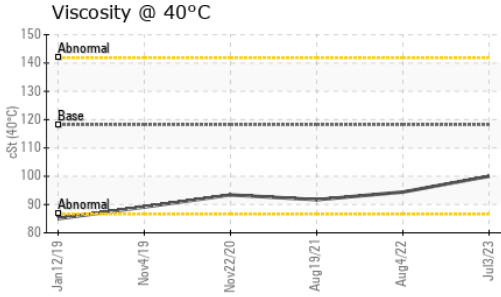


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>24.6</b>	24.7	22.2
Base Number (BN)	mg KOH/g	ASTM D2896*	9.8	<b>5.65</b>	5.14	5.80

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	<b>100</b>	94.4	91.7
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	<b>13.3</b>	12.7	12.4
Viscosity Index (VI)	Scale	ASTM D2270*	139	<b>131</b>	130	129

## GRAPHS

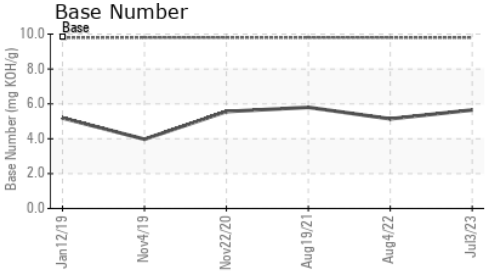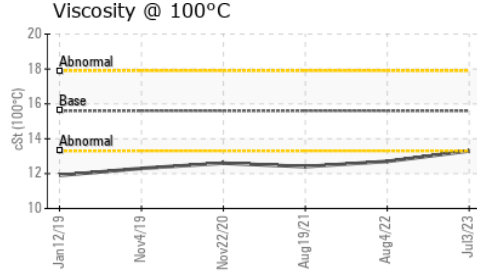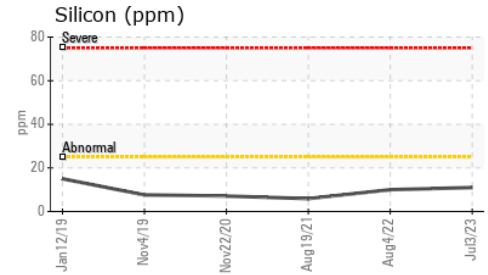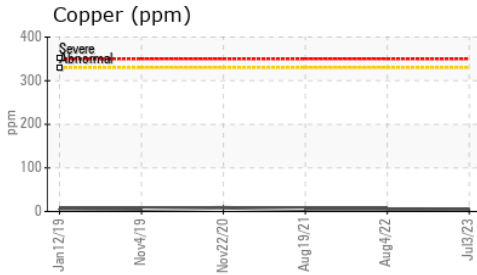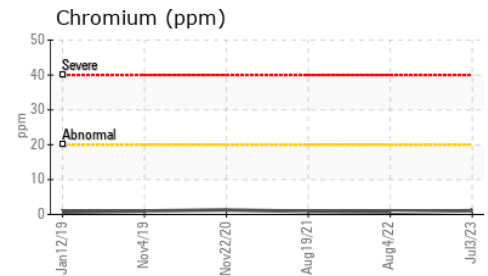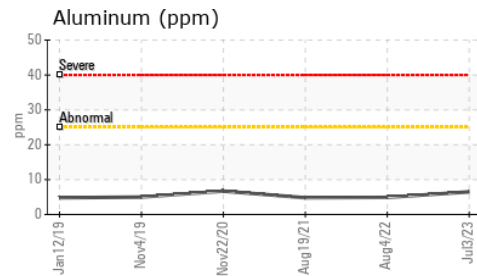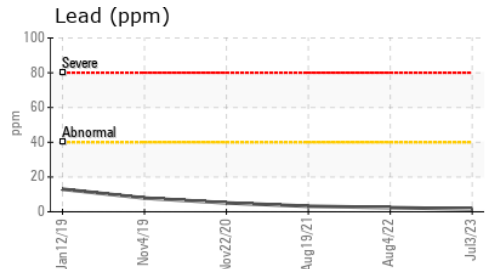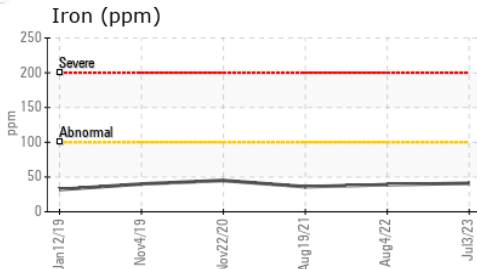

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0073964 **Received** : 18 Jul 2023  
**Lab Number** : **02570539** **Diagnosed** : 19 Jul 2023  
**Unique Number** : 5607585 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KV40, VI )

**TRANSDEV ST-JEAN**  
 720 TROTTER  
 ST-JEAN-SUR-RICHELIEU, QC  
 CA J3B 8T2  
 Contact: Eric Breton  
 eric.breton@transdev.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: