

Machine Id
5173
Component
Gasoline Engine
Fluid
SAE 5W20 (--- GAL)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il n'y a aucun indice de contamination dans l'huile.

Fluid Condition

Le résultat pour le BN indique que la réserve d'alcalinité est acceptable pour l'huile. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0073502	PC0073579	PC0073538
Sample Date	Client Info			04 Jul 2023	01 Jun 2023	28 Apr 2023
Machine Age	kms	Client Info		0	0	0
Oil Age	kms	Client Info		6134	6950	11512
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>150	6	6	6
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>40	1	1	2
Lead	ppm	ASTM D5185(m)	>50	0	0	0
Copper	ppm	ASTM D5185(m)	>155	6	7	6
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		68	48	100
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		70	71	67
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		525	532	501
Calcium	ppm	ASTM D5185(m)		1273	1264	1284
Phosphorus	ppm	ASTM D5185(m)		723	735	730
Zinc	ppm	ASTM D5185(m)		785	786	762
Sulfur	ppm	ASTM D5185(m)		2330	2332	2383
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>30	16	26	13
Sodium	ppm	ASTM D5185(m)		2	2	3
Potassium	ppm	ASTM D5185(m)	>20	0	<1	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	8.9	8.8	8.7
Sulfation	Abs./1mm	ASTM D7415*	>30	22.5	22.2	22.0

OIL ANALYSIS REPORT






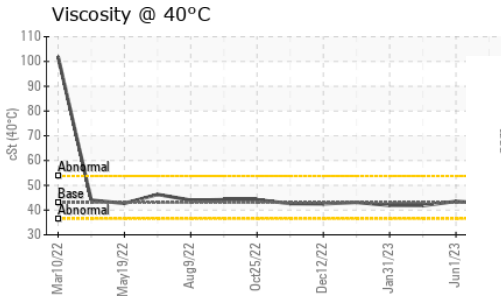
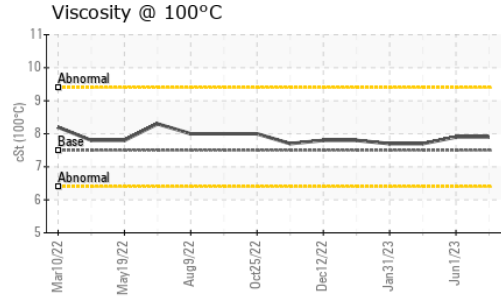
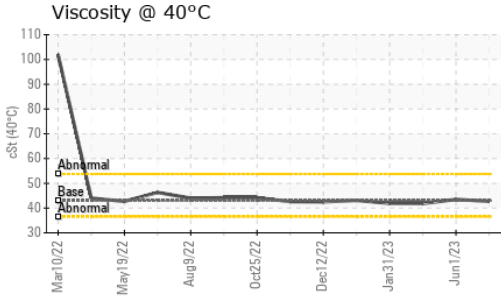


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	14.9	15.5	13.4
Base Number (BN)	mg KOH/g	ASTM D2896*		4.19	4.60	4.62

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	VLITE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	43.0	42.7	43.5	41.8
Visc @ 100°C	cSt	ASTM D7279(m)	7.5	7.9	7.9	7.7
Viscosity Index (VI)	Scale	ASTM D2270*	141	158	154	155

GRAPHS

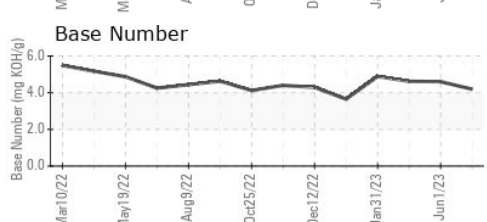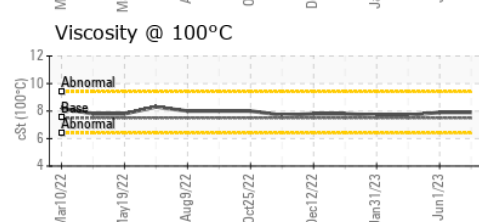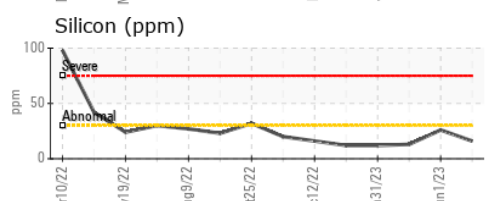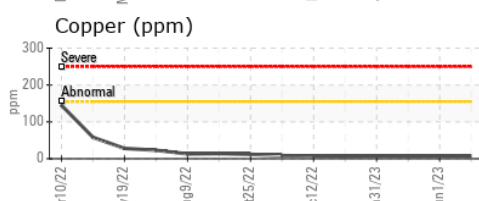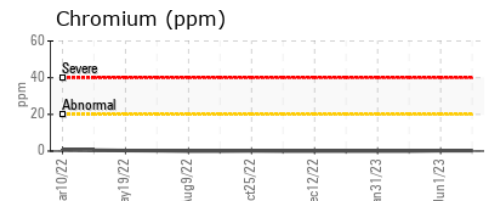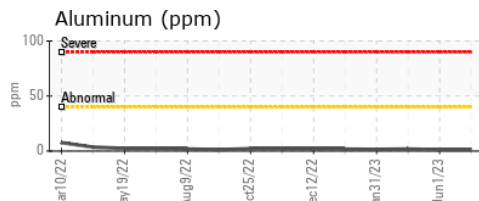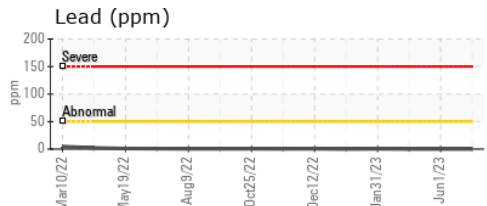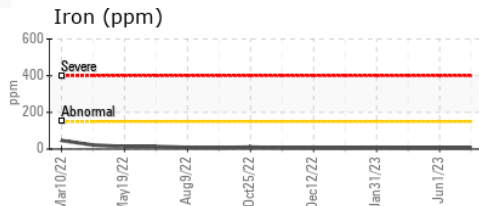

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0073502 **Received** : 18 Jul 2023
Lab Number : **02570593** **Diagnosed** : 19 Jul 2023
Unique Number : 5607639 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KV40, VI)

TRANSDEV ST-JEAN
 720 TROTTER
 ST-JEAN-SUR-RICHELIEU, QC
 CA J3B 8T2
 Contact: Eric Breton
 eric.breton@transdev.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.