




OIL ANALYSIS REPORT

Sample Rating Trend

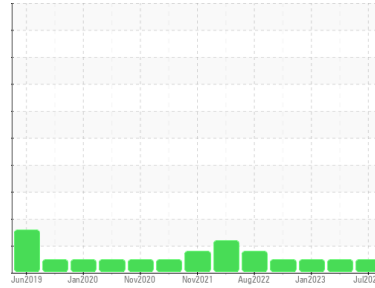

NORMAL



Machine Id
801189

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0077305	GFL0070428	GFL0059864
Sample Date	Client Info		17 Jul 2023	12 Apr 2023	18 Jan 2023
Machine Age	hrs	Client Info	8322	8322	0
Oil Age	hrs	Client Info	8322	8322	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	18	19	12
Chromium	ppm	ASTM D5185(m) >20	<1	<1	<1
Nickel	ppm	ASTM D5185(m) >4	0	<1	<1
Titanium	ppm	ASTM D5185(m)	0	<1	<1
Silver	ppm	ASTM D5185(m) >3	<1	0	0
Aluminum	ppm	ASTM D5185(m) >20	2	2	2
Lead	ppm	ASTM D5185(m) >40	0	<1	0
Copper	ppm	ASTM D5185(m) >330	2	1	2
Tin	ppm	ASTM D5185(m) >15	0	<1	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	2	2	1
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	57	58	56
Manganese	ppm	ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	941	933	907
Calcium	ppm	ASTM D5185(m) 1070	1023	1066	1054
Phosphorus	ppm	ASTM D5185(m) 1150	1013	1044	1018
Zinc	ppm	ASTM D5185(m) 1270	1170	1157	1142
Sulfur	ppm	ASTM D5185(m) 2060	2402	2513	2445
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	6	9	5
Sodium	ppm	ASTM D5185(m)	1	2	6
Potassium	ppm	ASTM D5185(m) >20	1	<1	2

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0.3	0.2	0.2
Nitration	Abs/cm	ASTM D7624* >20	9.5	9.7	9.0
Sulfation	Abs/.1mm	ASTM D7415* >30	20.3	22.8	20.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	17.1	17.5	16.5











OIL ANALYSIS REPORT

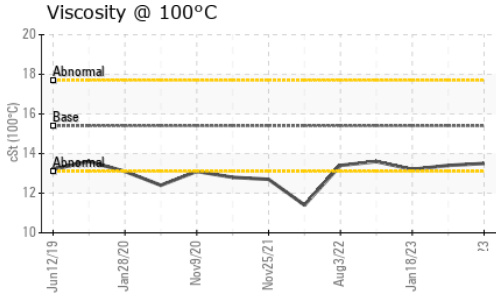

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.5	13.4

GRAPHS

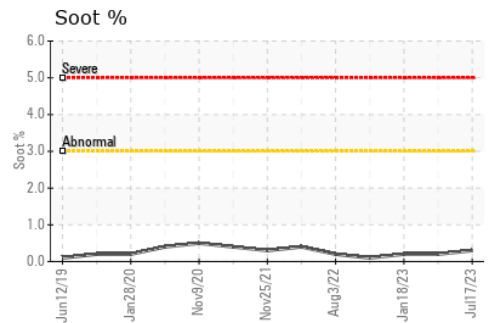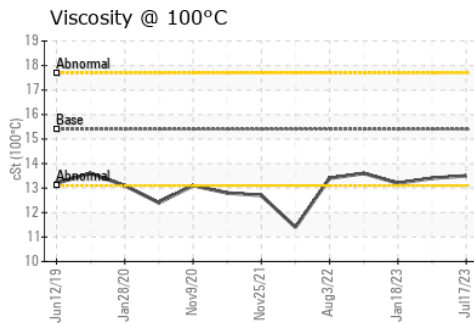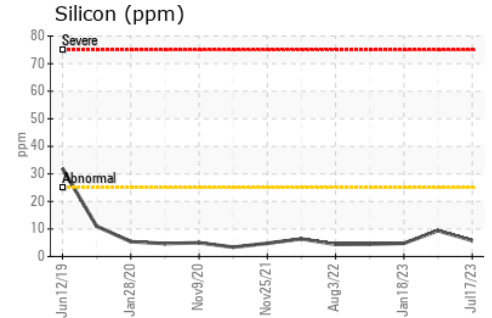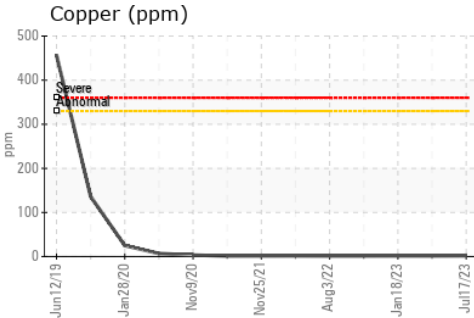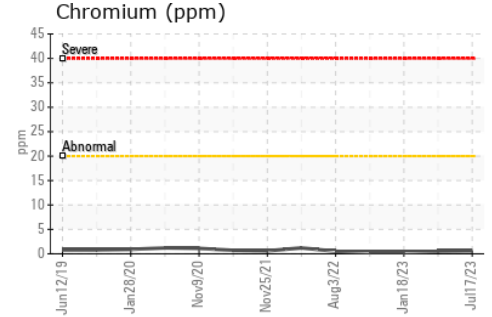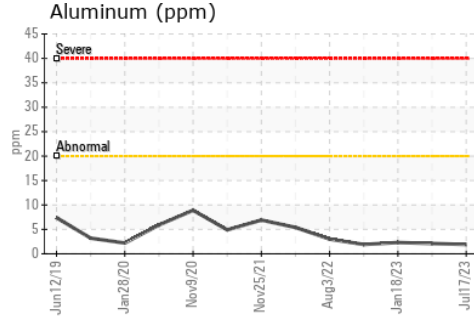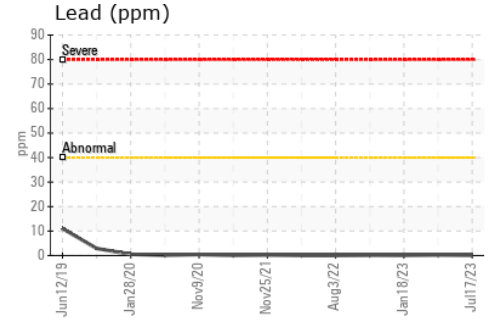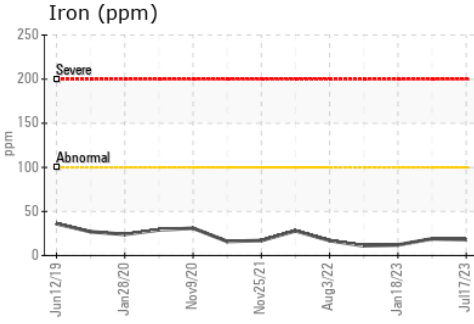

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 221 - Windsor**
Sample No. : GFL0077305 **Received** : 19 Jul 2023 **905 Tecumseh Road W**
Lab Number : 02570854 **Diagnosed** : 19 Jul 2023 **Windsor, ON**
Unique Number : 5615905 **Diagnostician** : Wes Davis **CA N8W 4J5**
Test Package : MOB 1 **Contact:** Rhys Marotte **rmarotte@gflenv.com**

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.