


Machine Id  
**PETERBILT D35**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON UHP 5W30 (--- GAL)**

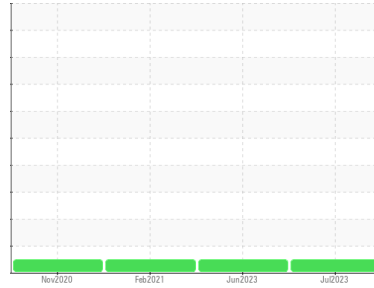

**DIAGNOSIS**

**Recommendation**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

**Wear**

Les taux d'usure de tous les composants sont normaux.

**Contamination**

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Il n'y a aucun indice de contamination dans l'huile.

**Fluid Condition**

Le résultat pour le BN indique que la réserve d'alcalinité est acceptable pour l'huile. L'état de l'huile permet d'en prolonger l'utilisation.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>PC0074360</b>   | PC0074364   | PC0036610   |
| Sample Date        | Client Info |             |            | <b>06 Jul 2023</b> | 16 Jun 2023 | 09 Feb 2021 |
| Machine Age        | hrs         | Client Info |            | <b>7533</b>        | 7411        | 800         |
| Oil Age            | hrs         | Client Info |            | <b>6857</b>        | 554         | 800         |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | N/A         |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | 0.0      |




| WEAR METALS |     | method        | limit/base | current      | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185(m) | >110       | <b>26</b>    | 21       | 43       |
| Chromium    | ppm | ASTM D5185(m) | >4         | <b>1</b>     | 1        | 2        |
| Nickel      | ppm | ASTM D5185(m) | >2         | <b>&lt;1</b> | 0        | <1       |
| Titanium    | ppm | ASTM D5185(m) |            | <b>0</b>     | <1       | 0        |
| Silver      | ppm | ASTM D5185(m) | >2         | <b>&lt;1</b> | <1       | <1       |
| Aluminum    | ppm | ASTM D5185(m) | >25        | <b>5</b>     | 5        | 29       |
| Lead        | ppm | ASTM D5185(m) | >45        | <b>&lt;1</b> | <1       | 2        |
| Copper      | ppm | ASTM D5185(m) | >85        | <b>3</b>     | 2        | 32       |
| Tin         | ppm | ASTM D5185(m) | >4         | <b>&lt;1</b> | 0        | 1        |
| Antimony    | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | <1       |
| Vanadium    | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Beryllium   | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Cadmium     | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method        | limit/base | current      | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185(m) | 0          | <b>14</b>    | 16       | 14       |
| Barium     | ppm | ASTM D5185(m) | 0          | <b>0</b>     | 0        | <1       |
| Molybdenum | ppm | ASTM D5185(m) | 64         | <b>59</b>    | 58       | 55       |
| Manganese  | ppm | ASTM D5185(m) | 0          | <b>&lt;1</b> | <1       | 1        |
| Magnesium  | ppm | ASTM D5185(m) | 1160       | <b>1074</b>  | 1054     | 1022     |
| Calcium    | ppm | ASTM D5185(m) | 820        | <b>855</b>   | 856      | 862      |
| Phosphorus | ppm | ASTM D5185(m) | 1160       | <b>998</b>   | 1001     | 851      |
| Zinc       | ppm | ASTM D5185(m) | 1260       | <b>1159</b>  | 1175     | 1164     |
| Sulfur     | ppm | ASTM D5185(m) | 3000       | <b>2644</b>  | 2691     | 2607     |
| Lithium    | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | <1       | <1       |

| CONTAMINANTS |     | method        | limit/base | current   | history1 | history2 |
|--------------|-----|---------------|------------|-----------|----------|----------|
| Silicon      | ppm | ASTM D5185(m) | >30        | <b>5</b>  | 5        | 7        |
| Sodium       | ppm | ASTM D5185(m) |            | <b>3</b>  | 3        | 5        |
| Potassium    | ppm | ASTM D5185(m) | >20        | <b>10</b> | 8        | 95       |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | ASTM D7844* | >3         | <b>0.3</b>  | 0.2      | 0.3      |
| Nitration | Abs/cm   | ASTM D7624* | >20        | <b>11.7</b> | 11.3     | 12.0     |
| Sulfation | Abs/.1mm | ASTM D7415* | >30        | <b>23.0</b> | 21.9     | 25.1     |

# OIL ANALYSIS REPORT






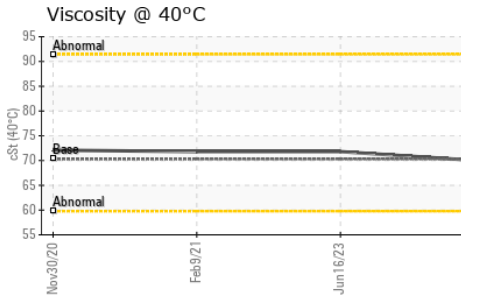
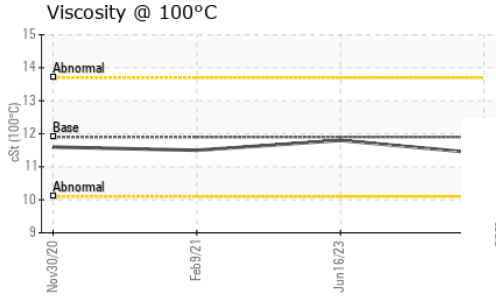
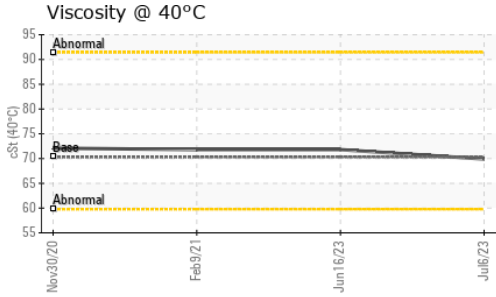


| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs./1mm | ASTM D7414* | >25        | <b>22.1</b> | 21.4     | 23.4     |
| Base Number (BN)  | mg KOH/g | ASTM D2896* | 11.0       | <b>7.02</b> | 7.61     | ---      |

| VISUAL           |        | method  | limit/base | current    | history1 | history2 |
|------------------|--------|---------|------------|------------|----------|----------|
| Emulsified Water | scalar | Visual* | >0.2       | <b>NEG</b> | NEG      | NEG      |
| Free Water       | scalar | Visual* |            | <b>NEG</b> | NEG      | NEG      |

| FLUID PROPERTIES     |       | method        | limit/base | current     | history1 | history2 |
|----------------------|-------|---------------|------------|-------------|----------|----------|
| Visc @ 40°C          | cSt   | ASTM D7279(m) | 70.3       | <b>69.9</b> | 71.8     | 71.8     |
| Visc @ 100°C         | cSt   | ASTM D7279(m) | 11.9       | <b>11.4</b> | 11.8     | 11.5     |
| Viscosity Index (VI) | Scale | ASTM D2270*   | 161        | <b>156</b>  | 160      | 154      |

## GRAPHS

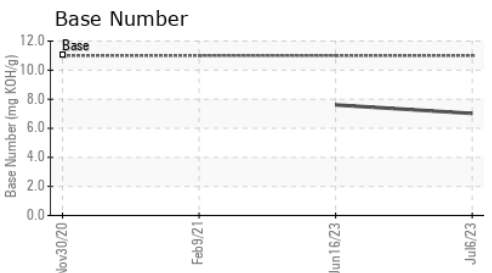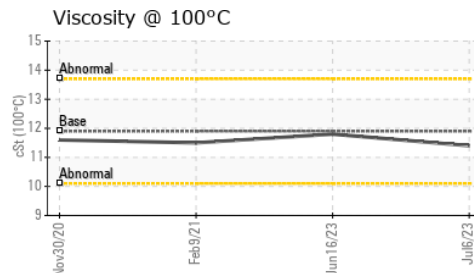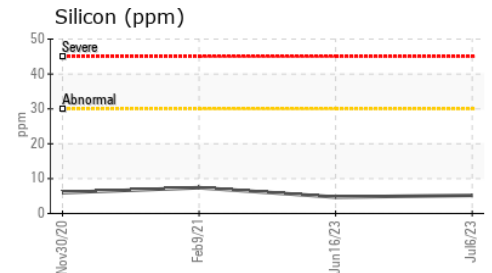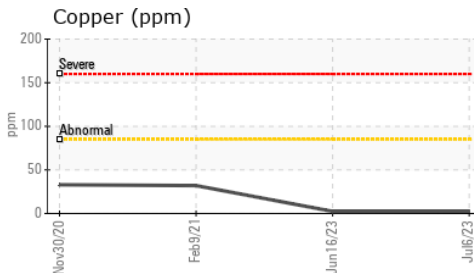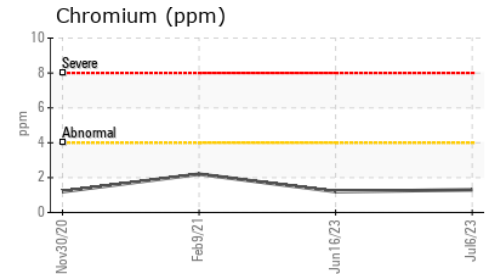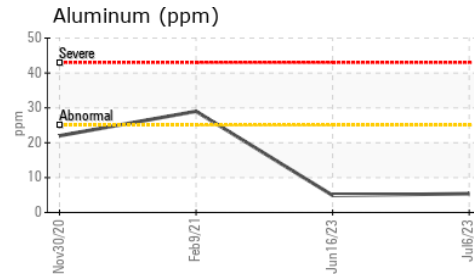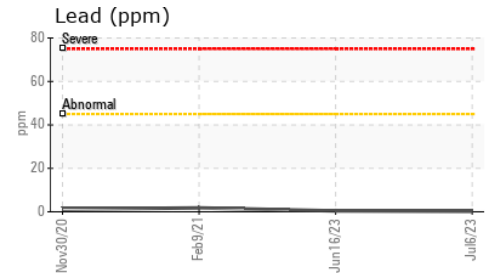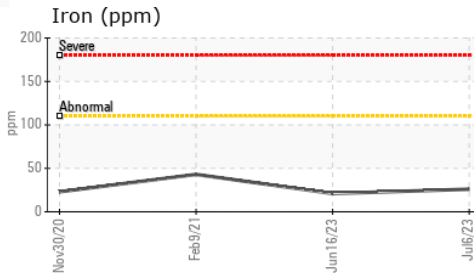

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0074360 **Received** : 20 Jul 2023  
**Lab Number** : **02571087** **Diagnosed** : 21 Jul 2023  
**Unique Number** : 5616138 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KV40, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**BOULE L INC**  
 9799 METROPOLITAIN E  
 ANJOU, QC  
 CA H1J 0A4  
 Contact: Sylvain Villeneuve  
 svilleneuve@boulegroup.com

T:  
F: