


PROBLEM SUMMARY

Sample Rating Trend



INSOLUBLES

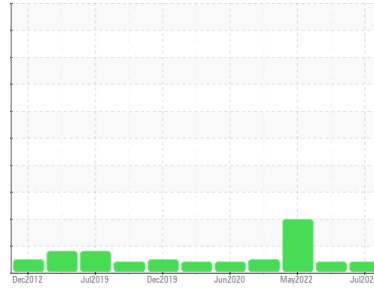


Machine Id
IMM #16 (S/N 2830058)

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX AW 46 (1500 LTR)

COMPONENT CONDITION SUMMARY

▲ Varnish Potential

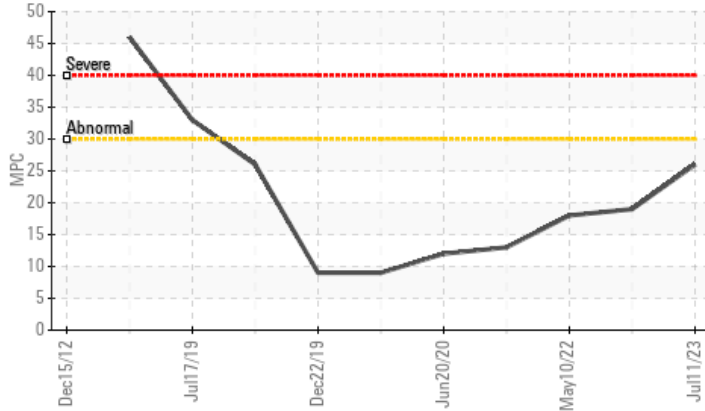

RECOMMENDATION

We recommend an early resample to monitor this condition. No other corrective action is recommended at this time. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

PROBLEMATIC TEST RESULTS

| Sample Status | | MARGINAL | MARGINAL | ABNORMAL | | |
|-----------------------|-------|-----------------|----------|----------|------|------|
| MPC Varnish Potential | Scale | ASTM D7843(m)* | >15 | ▲ 26 | ▲ 19 | ▲ 18 |

Customer Id: ROPOAK
Sample No.: PC0076918
Lab Number: 02571207
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|------------------|--------|------|---------|---|
| Resample | --- | --- | ? | We recommend an early resample to monitor this condition. |
| Contact Required | --- | --- | ? | Please contact your representative for information regarding the proper sampling kits for your service. |
| Alert | --- | --- | ? | NOTE: We recommend using IND 3 test kits, |

HISTORICAL DIAGNOSIS

21 Sep 2022 Diag: Kevin Marson

INSOLUBLES



We recommend an early resample to monitor this condition. No other corrective action is recommended at this time. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates a light concentration of varnish present. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



10 May 2022 Diag: Kevin Marson

INSOLUBLES



We recommend you service the filters on this component. We recommend an early resample to monitor this condition. No other corrective action is recommended at this time. All component wear rates are normal. Oil Cleanliness are abnormally high. Particles >4µm are abnormally high. Particles >6µm are abnormally high. Particles >14µm are notably high. MPC Varnish Potential contamination levels are marginally high. MPC (Membrane Patch Colorimetry) test indicates a light concentration of varnish present. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



28 Oct 2021 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates acceptable levels of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report



Machine Id
IMM #16 (S/N 2830058)

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX AW 46 (1500 LTR)

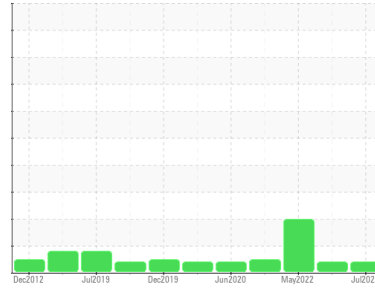

DIAGNOSIS

Recommendation

We recommend an early resample to monitor this condition. No other corrective action is recommended at this time. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

Wear

Component wear rates appear to be normal (unconfirmed).

Contamination

MPC (Membrane Patch Colorimetry) test indicates a light concentration of varnish present.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PC0076918 | PC0062445 | PC0044703 |
| Sample Date | Client Info | | | 11 Jul 2023 | 21 Sep 2022 | 10 May 2022 |
| Machine Age | mths | Client Info | | 0 | 0 | 0 |
| Oil Age | mths | Client Info | | 0 | 36 | 0 |
| Oil Changed | Client Info | | | N/A | N/A | N/A |
| Sample Status | | | | MARGINAL | MARGINAL | ABNORMAL |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) | >40 | <1 | <1 | <1 |
| Chromium | ppm | ASTM D5185(m) | >4 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) | >20 | <1 | 0 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >4 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185(m) | >10 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185(m) | >60 | 2 | 1 | <1 |
| Tin | ppm | ASTM D5185(m) | >4 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |


| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) | 0 | <1 | <1 | 0 |
| Barium | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) | 0 | 2 | 0 | 0 |
| Calcium | ppm | ASTM D5185(m) | 50 | 40 | 45 | 46 |
| Phosphorus | ppm | ASTM D5185(m) | 330 | 362 | 351 | 344 |
| Zinc | ppm | ASTM D5185(m) | 430 | 398 | 388 | 409 |
| Sulfur | ppm | ASTM D5185(m) | 760 | 736 | 731 | 719 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >20 | 0 | 0 | 0 |
| Sodium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | <1 | <1 |


| FLUID CLEANLINESS | | method | limit/base | current | history1 | history2 |
|-------------------|--|--------------|------------|-----------------|----------|------------|
| Particles >4µm | | ASTM D7647 | >5000 | 2440 | 3954 | ▲ 10100 |
| Particles >6µm | | ASTM D7647 | >1300 | 429 | 825 | ▲ 2570 |
| Particles >14µm | | ASTM D7647 | >160 | 26 | 31 | ▲ 213 |
| Particles >21µm | | ASTM D7647 | >40 | 6 | 5 | 36 |
| Particles >38µm | | ASTM D7647 | >10 | 0 | 0 | 4 |
| Particles >71µm | | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | 18/16/12 | 19/17/12 | ▲ 21/19/15 |

OIL ANALYSIS REPORT


▲ Varnish Potential

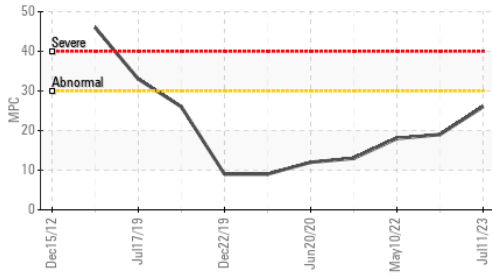


Particle Count

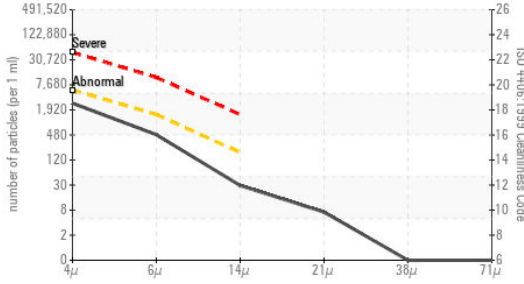


Acid Number

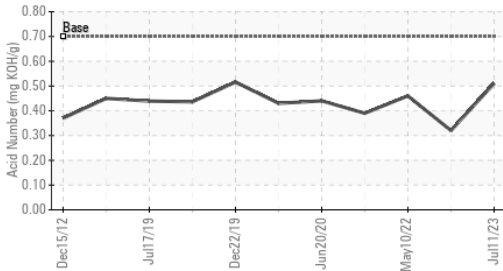

Viscosity @ 100°C

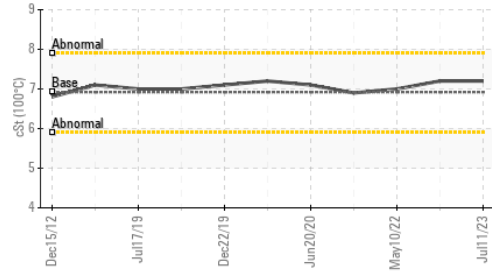

Viscosity @ 40°C

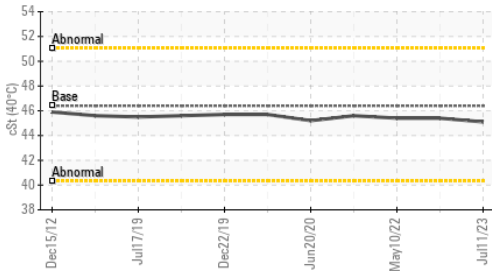

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 | |
|-----------------------|----------|----------------|---------|-------------|----------|------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | 0.70 | 0.51 | 0.32 | 0.46 |
| MPC Varnish Potential | Scale | ASTM D7843(m)* | >15 | ▲ 26 | ▲ 19 | ▲ 18 |

VISUAL


| | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|--------------|----------|-------|
| White Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | VLITE | VLITE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.05 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

FLUID PROPERTIES

| | method | limit/base | current | history1 | history2 | |
|----------------------|--------|---------------|---------|-------------|----------|------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 46.4 | 45.1 | 45.4 | 45.4 |
| Visc @ 100°C | cSt | ASTM D7279(m) | 6.92 | 7.2 | 7.2 | 7 |
| Viscosity Index (VI) | Scale | ASTM D2270* | 104 | 120 | 119 | 111 |

SAMPLE IMAGES

| | method | limit/base | current | history1 | history2 |
|--------|--------|------------|---------|----------|----------|
| Color | | | | | |
| Bottom | | | | | |
| MPC | | | | | |

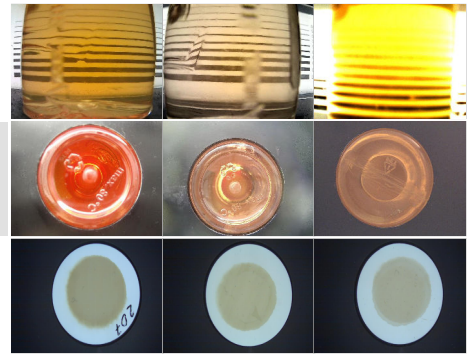

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0076918 **Received** : 20 Jul 2023
Lab Number : **02571207** **Diagnosed** : 21 Jul 2023
Unique Number : 5616258 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: KV100, MPC, TAN Man, VI)


ROPAK PACKAGING CANADA
 2240 WYECROFT RD
 OAKVILLE, ON
 CA L6L 6M1
 Contact: Frank Maio
 Frank.Maio@mauserpackaging.com
 T: (905)465-9019
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

MPC (Varnish Test)



Sample Color & Clarity

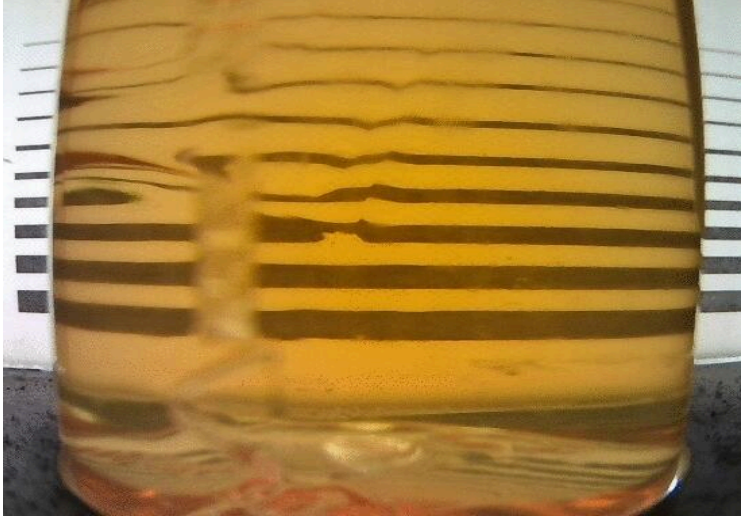

This page left intentionally blank