


PROBLEM SUMMARY

Sample Rating Trend




INSOLUBLES

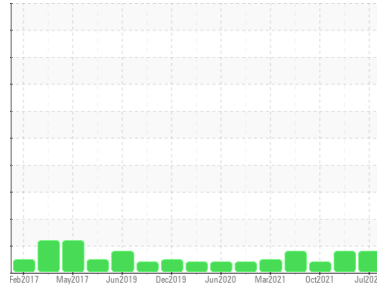

Machine Id
IMM #26 (S/N 5142159)
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX AW 46 (1500 LTR)

COMPONENT CONDITION SUMMARY

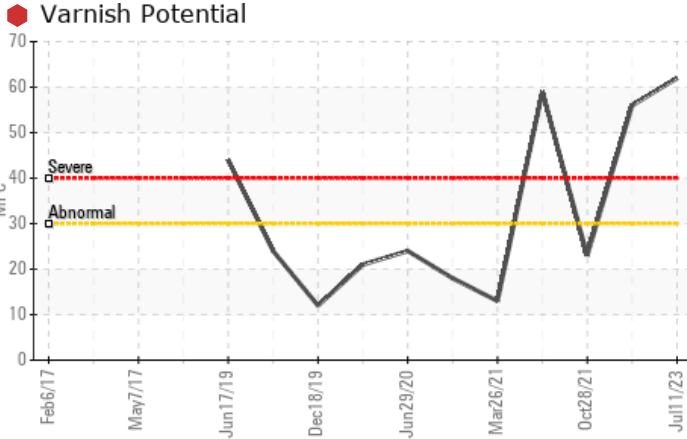

RECOMMENDATION

We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	MARGINAL
MPC Varnish Potential	Scale	ASTM D7843(m)*	>15	62	56	23

Customer Id: ROPOAK
Sample No.: PC0076975
Lab Number: 02571235
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Contact Required	---	---	?	Please contact your representative for information regarding the proper sampling kits for your service.
Alert	---	---	?	NOTE: We recommend using IND 3 test kits,
Filter Fluid	---	---	?	We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level.

HISTORICAL DIAGNOSIS

21 Sep 2022 Diag: Kevin Marson

INSOLUBLES



We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates a high concentration of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The AN level is acceptable for this fluid.

[view report](#)



28 Oct 2021 Diag: Kevin Marson

INSOLUBLES



We recommend an early resample to monitor this condition. No other corrective action is recommended at this time. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates a light concentration of varnish present. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



10 Jun 2021 Diag: Kevin Marson

INSOLUBLES



We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates a high concentration of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The AN level is acceptable for this fluid.

[view report](#)






Machine Id
IMM #26 (S/N 5142159)

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX AW 46 (1500 LTR)

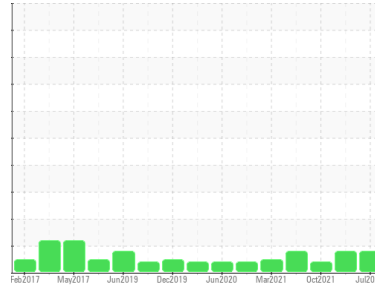

DIAGNOSIS

Recommendation

We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

Wear

Component wear rates appear to be normal (unconfirmed).

Contamination

MPC (Membrane Patch Colorimetry) test indicates a high concentration of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0076975	PC0062148	PC0052948
Sample Date	Client Info		11 Jul 2023	21 Sep 2022	28 Oct 2021
Machine Age	mths	Client Info	0	0	0
Oil Age	mths	Client Info	0	72	0
Oil Changed	Client Info		N/A	Not Changd	N/A
Sample Status			SEVERE	SEVERE	MARGINAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	<1	<1	0
Chromium	ppm	ASTM D5185(m) >20	0	0	0
Nickel	ppm	ASTM D5185(m) >20	<1	0	<1
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m)	0	0	0
Aluminum	ppm	ASTM D5185(m) >20	<1	0	0
Lead	ppm	ASTM D5185(m) >20	0	<1	<1
Copper	ppm	ASTM D5185(m) >20	1	<1	<1
Tin	ppm	ASTM D5185(m) >20	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<1	<1	<1
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 0	0	0	0
Manganese	ppm	ASTM D5185(m) 0	0	0	0
Magnesium	ppm	ASTM D5185(m) 0	2	0	<1
Calcium	ppm	ASTM D5185(m) 50	26	36	52
Phosphorus	ppm	ASTM D5185(m) 330	349	341	353
Zinc	ppm	ASTM D5185(m) 430	326	346	419
Sulfur	ppm	ASTM D5185(m) 760	684	695	728
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	0	0	<1
Sodium	ppm	ASTM D5185(m)	<1	<1	0
Potassium	ppm	ASTM D5185(m) >20	<1	<1	<1

FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	3509	1919	231
Particles >6µm	ASTM D7647	>1300	577	475	51
Particles >14µm	ASTM D7647	>160	22	26	8
Particles >21µm	ASTM D7647	>40	6	6	2
Particles >38µm	ASTM D7647	>10	1	1	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	19/16/12	18/16/12	15/13/10

OIL ANALYSIS REPORT


Varnish Potential

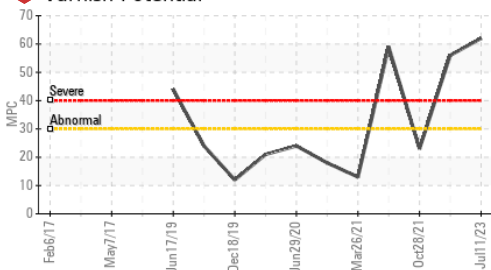


Particle Count

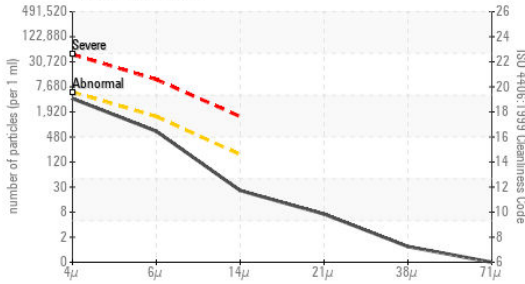


Acid Number

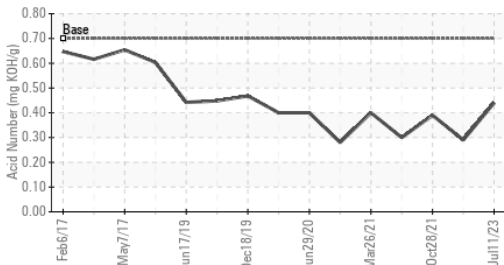

Viscosity @ 100°C

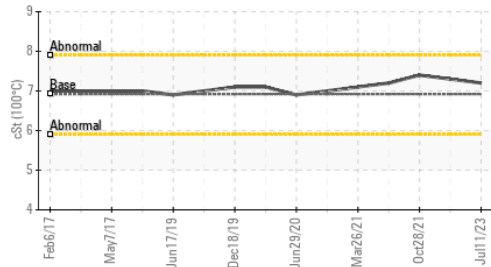

Viscosity @ 40°C

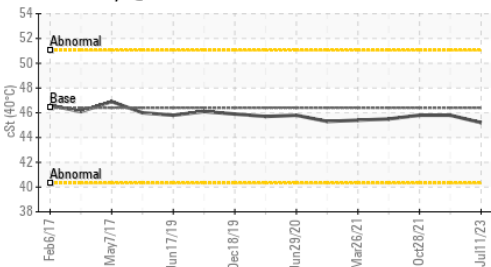

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.70	0.44	0.29	0.39
MPC Varnish Potential	Scale	ASTM D7843(m)*	>15	62	56	23

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.4	45.2	45.8	45.8
Visc @ 100°C	cSt	ASTM D7279(m)	6.92	7.2	7.3	7.4
Viscosity Index (VI)	Scale	ASTM D2270*	104	119	121	125

SAMPLE IMAGES


Color



Bottom



MPC




Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0076975 **Received** : 20 Jul 2023
Lab Number : **02571235** **Diagnosed** : 21 Jul 2023
Unique Number : 5616286 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: KV100, MPC, TAN Man, VI)


ROPAK PACKAGING CANADA
 2240 WYECROFT RD
 OAKVILLE, ON
 CA L6L 6M1
 Contact: Frank Maio
 Frank.Maio@mauserpackaging.com
 T: (905)465-9019
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

MPC (Varnish Test)

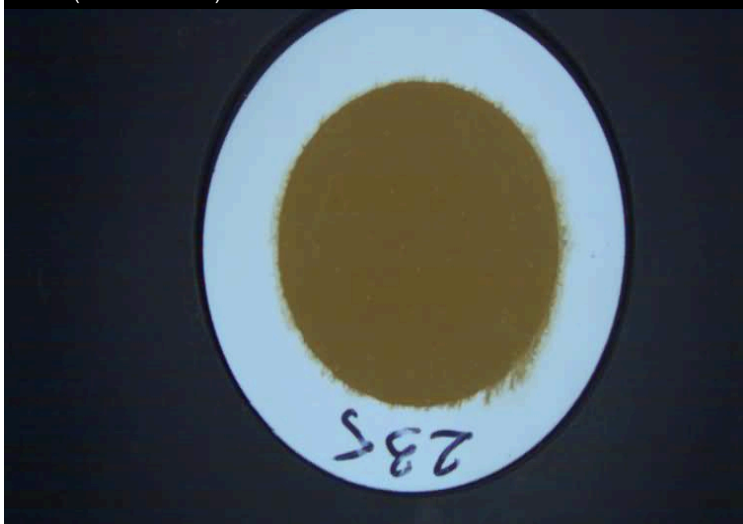

Sample Color & Clarity

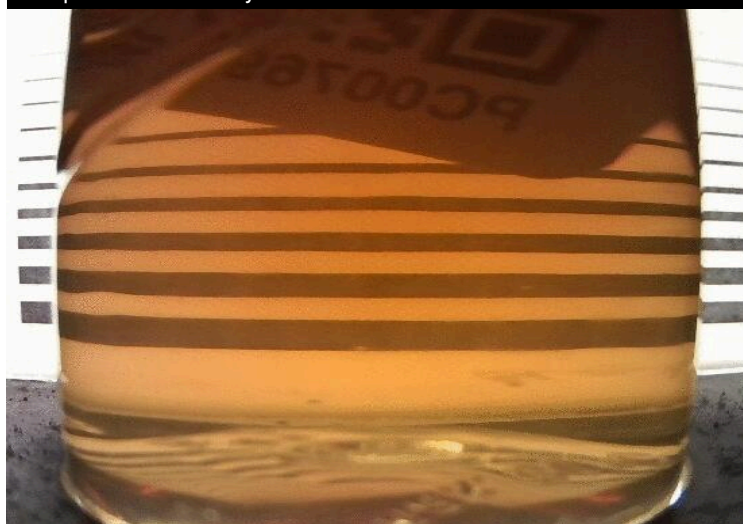

This page left intentionally blank