


PROBLEM SUMMARY

Sample Rating Trend



INSOLUBLES

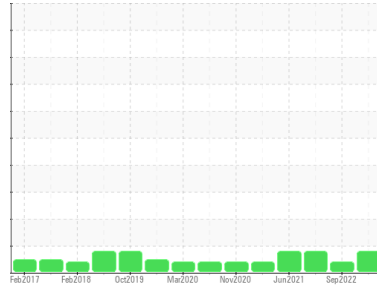


Machine Id
IMM #25 (S/N 5142163)

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX AW 46 (1500 LTR)

COMPONENT CONDITION SUMMARY

Varnish Potential

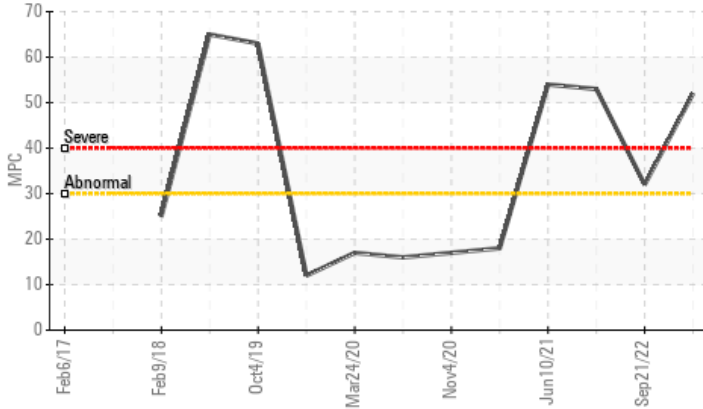

RECOMMENDATION

We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

PROBLEMATIC TEST RESULTS

| Sample Status | | | | SEVERE | ABNORMAL | SEVERE |
|-----------------------|-------|----------------|-----|--------|----------|--------|
| MPC Varnish Potential | Scale | ASTM D7843(m)* | >15 | 52 | 32 | 53 |

Customer Id: ROPOAK
Sample No.: PC0076977
Lab Number: 02571236
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|------------------|--------|------|---------|---|
| Resample | --- | --- | ? | We recommend an early resample to monitor this condition. |
| Contact Required | --- | --- | ? | Please contact your representative for information regarding the proper sampling kits for your service. |
| Alert | --- | --- | ? | NOTE: We recommend using IND 3 test kits, |
| Filter Fluid | --- | --- | ? | We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. |

HISTORICAL DIAGNOSIS

21 Sep 2022 Diag: Kevin Marson

INSOLUBLES



We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates a moderate concentration of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The AN level is acceptable for this fluid.

[view report](#)



28 Oct 2021 Diag: Kevin Marson

INSOLUBLES



We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates a high concentration of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The AN level is acceptable for this fluid.

[view report](#)



10 Jun 2021 Diag: Kevin Marson

INSOLUBLES



We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates a high concentration of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The AN level is acceptable for this fluid.

[view report](#)






Machine Id
IMM #25 (S/N 5142163)

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX AW 46 (1500 LTR)

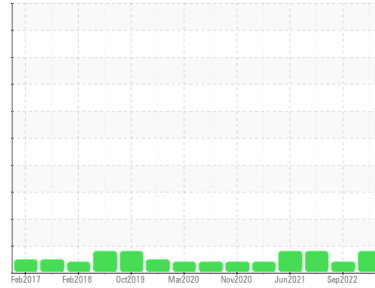

DIAGNOSIS

Recommendation

We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

Wear

Component wear rates appear to be normal (unconfirmed).

Contamination

MPC (Membrane Patch Colorimetry) test indicates a high concentration of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | PC0076977 | PC0062150 | PC0052945 |
| Sample Date | Client Info | | 11 Jul 2023 | 21 Sep 2022 | 28 Oct 2021 |
| Machine Age | mths | Client Info | 0 | 0 | 0 |
| Oil Age | mths | Client Info | 0 | 72 | 0 |
| Oil Changed | Client Info | | N/A | Not Changd | N/A |
| Sample Status | | | SEVERE | ABNORMAL | SEVERE |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|---------------|---------|--------------|----------|
| Iron | ppm | ASTM D5185(m) | >20 | <1 | <1 |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) | >20 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >20 | 0 | 0 |
| Lead | ppm | ASTM D5185(m) | >20 | 0 | 1 |
| Copper | ppm | ASTM D5185(m) | >20 | 1 | <1 |
| Tin | ppm | ASTM D5185(m) | >20 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | | 0 | <1 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|---------------|---------|--------------|----------|
| Boron | ppm | ASTM D5185(m) | 0 | <1 | <1 |
| Barium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) | 0 | 1 | <1 |
| Calcium | ppm | ASTM D5185(m) | 50 | 27 | 29 |
| Phosphorus | ppm | ASTM D5185(m) | 330 | 352 | 344 |
| Zinc | ppm | ASTM D5185(m) | 430 | 336 | 325 |
| Sulfur | ppm | ASTM D5185(m) | 760 | 723 | 729 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 |

CONTAMINANTS


| | method | limit/base | current | history1 | history2 |
|-----------|--------|---------------|---------|--------------|----------|
| Silicon | ppm | ASTM D5185(m) | >15 | 0 | 0 |
| Sodium | ppm | ASTM D5185(m) | | <1 | <1 |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | 0 |

FLUID CLEANLINESS


| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | >5000 | 726 | 2711 | 483 |
| Particles >6µm | ASTM D7647 | >1300 | 207 | 632 | 142 |
| Particles >14µm | ASTM D7647 | >160 | 22 | 34 | 11 |
| Particles >21µm | ASTM D7647 | >40 | 6 | 10 | 3 |
| Particles >38µm | ASTM D7647 | >10 | 1 | 0 | 0 |
| Particles >71µm | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | 17/15/12 | 19/16/12 | 16/14/11 |

OIL ANALYSIS REPORT


Varnish Potential

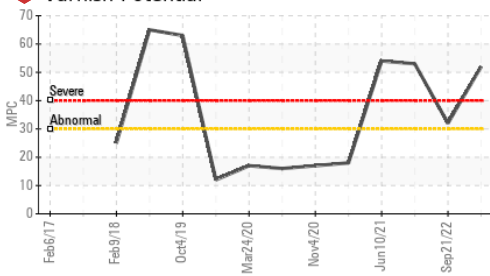


Particle Count

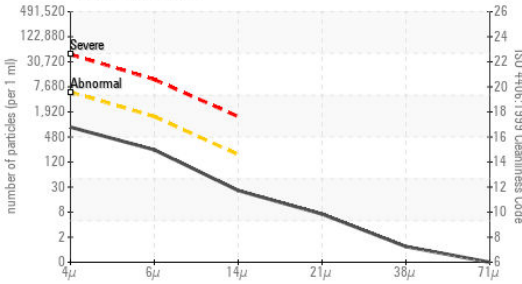


Acid Number

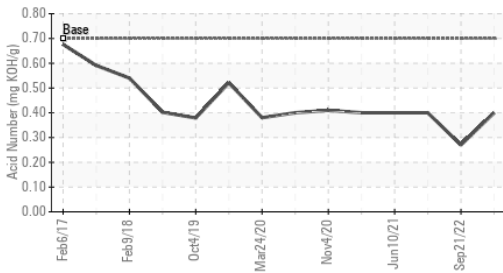

Viscosity @ 100°C

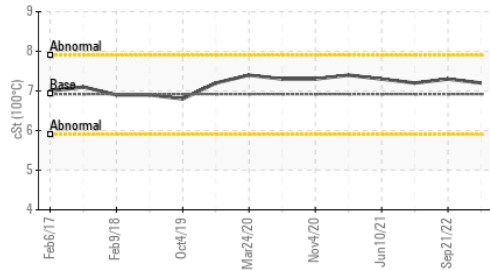

Viscosity @ 40°C

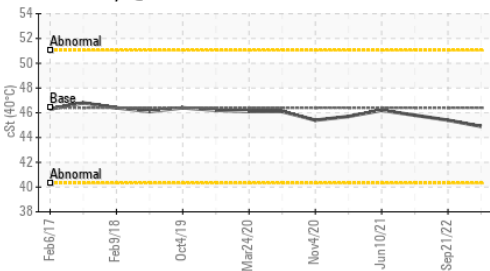


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-----------------------|----------|----------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | 0.70 | 0.40 | 0.27 | 0.40 |
| MPC Varnish Potential | Scale | ASTM D7843(m)* | >15 | 52 | 32 | 53 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.05 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|----------------------|-------|---------------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 46.4 | 44.9 | 45.4 | 45.8 |
| Visc @ 100°C | cSt | ASTM D7279(m) | 6.92 | 7.2 | 7.3 | 7.2 |
| Viscosity Index (VI) | Scale | ASTM D2270* | 104 | 121 | 122 | 117 |

SAMPLE IMAGES

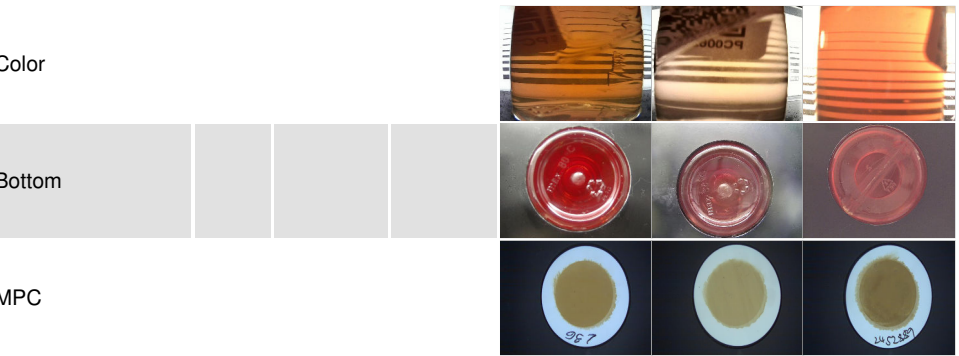

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0076977 **Received** : 20 Jul 2023
Lab Number : **02571236** **Diagnosed** : 21 Jul 2023
Unique Number : 5616287 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: KV100, MPC, TAN Man, VI)


ROPAK PACKAGING CANADA
 2240 WYECROFT RD
 OAKVILLE, ON
 CA L6L 6M1
 Contact: Frank Maio
 Frank.Maio@mauserpackaging.com
 T: (905)465-9019
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

MPC (Varnish Test)



Sample Color & Clarity

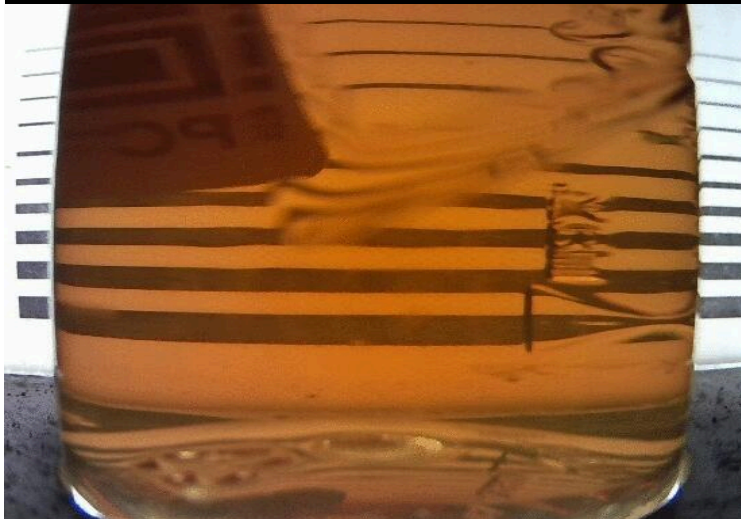

This page left intentionally blank