


# PROBLEM SUMMARY

Sample Rating Trend



**INSOLUBLES**

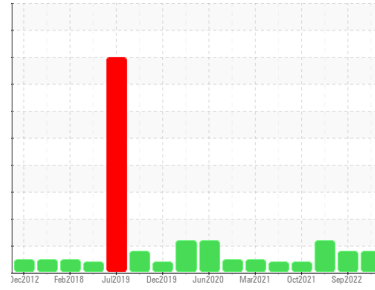


Machine Id  
**IMM #9 (S/N 61022222)**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA HYDREX AW 46 (2000 LTR)**

## COMPONENT CONDITION SUMMARY

### Varnish Potential

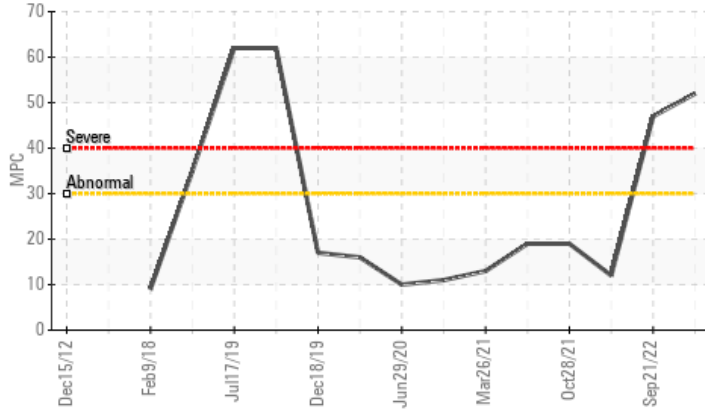

## RECOMMENDATION

We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

## PROBLEMATIC TEST RESULTS

Sample Status	SEVERE	SEVERE	ATTENTION
MPC Varnish Potential	52	47	12

**Customer Id:** ROPOAK  
**Sample No.:** PC0076959  
**Lab Number:** 02571238  
**Test Package:** IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Contact Required	---	---	?	Please contact your representative for information regarding the proper sampling kits for your service.
Alert	---	---	?	NOTE: We recommend using IND 3 test kits,
Filter Fluid	---	---	?	We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level.

## HISTORICAL DIAGNOSIS

### 21 Sep 2022 Diag: Kevin Marson

#### INSOLUBLES



We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates a high concentration of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The AN level is acceptable for this fluid.

[view report](#)



### 10 May 2022 Diag: Wes Davis

#### ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a light amount of silt (particulates < 14 microns in size) present in the oil. MPC (Membrane Patch Colorimetry) test indicates acceptable levels of varnish present. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



### 28 Oct 2021 Diag: Kevin Marson

#### INSOLUBLES



We recommend an early resample to monitor this condition. No other corrective action is recommended at this time. All component wear rates are normal. MPC (Membrane Patch Colorimetry) test indicates a light concentration of varnish present. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)






Machine Id  
**IMM #9 (S/N 61022222)**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA HYDREX AW 46 (2000 LTR)**

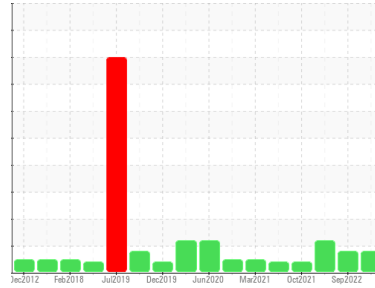

**DIAGNOSIS**

**Recommendation**

We recommend that you use electrostatic filtration to remove insolubles from the oil and to reduce the levels of varnish in the system. Alternatively draining a percentage of the oil and topping up with fresh oil (sweetening the oil) may provide a reduction in the varnish potential level. We recommend an early resample to monitor this condition. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

**Wear**

Component wear rates appear to be normal (unconfirmed).

**Contamination**

MPC (Membrane Patch Colorimetry) test indicates a high concentration of varnish present. The system cleanliness is acceptable for your target ISO 4406 cleanliness code.

**Fluid Condition**

The AN level is acceptable for this fluid.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PC0076959</b>	PC0062456	PC0052947
Sample Date	Client Info		<b>11 Jul 2023</b>	21 Sep 2022	10 May 2022
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	60	0
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>SEVERE</b>	SEVERE	ATTENTION

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >40	<1	<1	<1
Chromium	ppm	ASTM D5185(m) >4	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >20	<1	0	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >4	<1	0	0
Lead	ppm	ASTM D5185(m) >10	<1	0	0
Copper	ppm	ASTM D5185(m) >60	<1	<1	<1
Tin	ppm	ASTM D5185(m) >4	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<1	<1	0
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 0	<1	0	0
Calcium	ppm	ASTM D5185(m) 50	<b>27</b>	30	34
Phosphorus	ppm	ASTM D5185(m) 330	<b>346</b>	345	341
Zinc	ppm	ASTM D5185(m) 430	<b>315</b>	325	362
Sulfur	ppm	ASTM D5185(m) 760	<b>679</b>	700	701
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

**CONTAMINANTS**


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<b>0</b>	0	0
Sodium	ppm	ASTM D5185(m)	<b>3</b>	0	0
Potassium	ppm	ASTM D5185(m) >20	<b>1</b>	0	<1

**FLUID CLEANLINESS**


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>195</b>	1866	▲ 6823
Particles >6µm	ASTM D7647	>1300	<b>31</b>	412	▲ 1568
Particles >14µm	ASTM D7647	>160	<b>2</b>	30	91
Particles >21µm	ASTM D7647	>40	<b>1</b>	8	13
Particles >38µm	ASTM D7647	>10	<b>0</b>	0	1
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>15/12/9</b>	18/16/12	▲ 20/18/14

# OIL ANALYSIS REPORT


## Varnish Potential

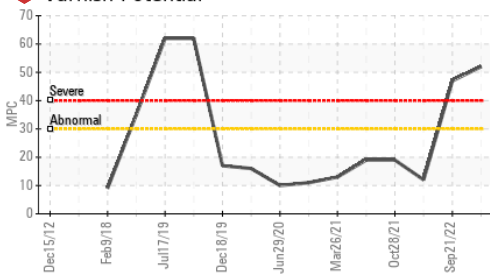


## Particle Count

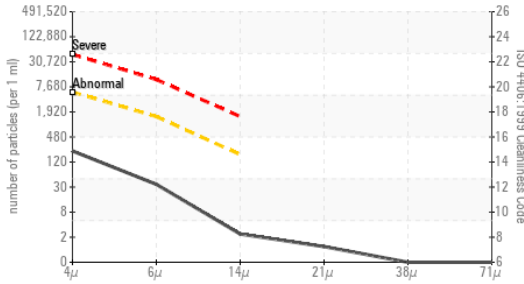


## Acid Number

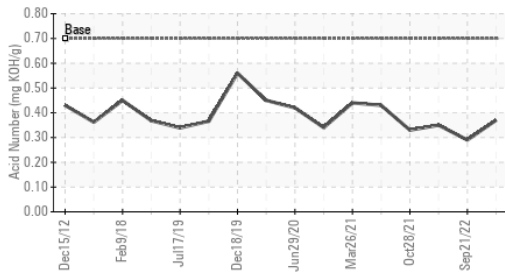

## Viscosity @ 100°C

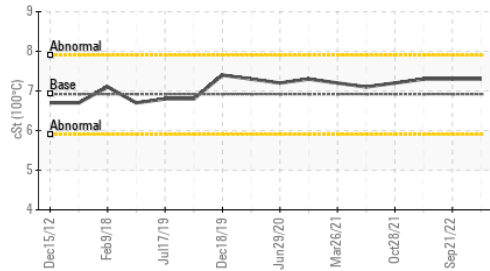

## Viscosity @ 40°C

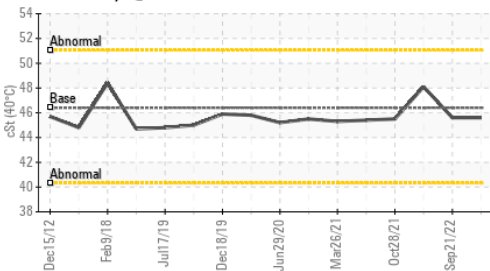

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.70	<b>0.37</b>	0.29	0.35
MPC Varnish Potential	Scale	ASTM D7843(m)*	>15	<b>52</b>	47	12

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.4	<b>45.6</b>	45.6	48.1
Visc @ 100°C	cSt	ASTM D7279(m)	6.92	<b>7.3</b>	7.3	7.3
Viscosity Index (VI)	Scale	ASTM D2270*	104	<b>122</b>	122	112

## SAMPLE IMAGES



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0076959  
**Lab Number** : **02571238**  
**Unique Number** : 5616289  
**Test Package** : IND 2 ( Additional Tests: KV100, MPC, TAN Man, VI )  
**Received** : 20 Jul 2023  
**Diagnosed** : 21 Jul 2023  
**Diagnostician** : Kevin Marson


**ROPAK PACKAGING CANADA**  
 2240 WYECROFT RD  
 OAKVILLE, ON  
 CA L6L 6M1  
 Contact: Frank Maio  
 Frank.Maio@mauserpackaging.com  
 T: (905)465-9019  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

MPC (Varnish Test)



Sample Color & Clarity

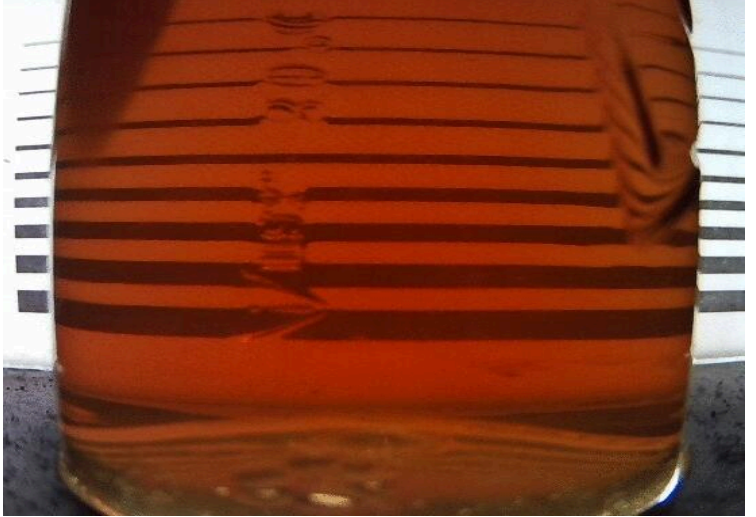

*This page left intentionally blank*