




Machine Id
DR133

Component
Hydraulic System

Fluid
PETRO CANADA ENVIRON MV 46 (30 LTR)

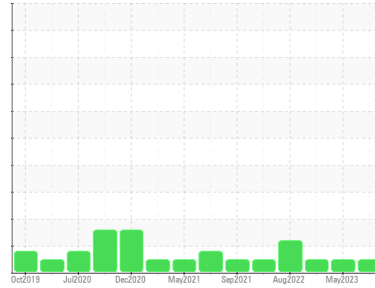

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component(unconfirmed).

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | PC0078558 | PC0070084 | PC0061583 |
| Sample Date | Client Info | 13 Jul 2023 | 04 May 2023 | 31 Mar 2023 |
| Machine Age | hrs | 15840 | 0 | 15423 |
| Oil Age | hrs | 0 | 0 | 0 |
| Oil Changed | Client Info | Not Chngd | Not Chngd | Not Chngd |
| Sample Status | | NORMAL | NORMAL | NORMAL |

WEAR METALS

| method | limit/base | current | history1 | history2 | |
|-----------|------------|-------------------|--------------|----------|----|
| Iron | ppm | ASTM D5185(m) >20 | 4 | 5 | 4 |
| Chromium | ppm | ASTM D5185(m) >10 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) >10 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) >10 | <1 | <1 | <1 |
| Lead | ppm | ASTM D5185(m) >10 | <1 | 1 | 1 |
| Copper | ppm | ASTM D5185(m) >75 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185(m) >10 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 | |
|------------|------------|--------------------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) 0 | <1 | <1 | <1 |
| Barium | ppm | ASTM D5185(m) 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) 0 | <1 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) 0 | 0 | 0 | <1 |
| Magnesium | ppm | ASTM D5185(m) 0 | 3 | 1 | 1 |
| Calcium | ppm | ASTM D5185(m) 0 | 11 | 10 | 10 |
| Phosphorus | ppm | ASTM D5185(m) 650 | 539 | 535 | 526 |
| Zinc | ppm | ASTM D5185(m) 0 | 54 | 61 | 59 |
| Sulfur | ppm | ASTM D5185(m) 1420 | 1543 | 1672 | 1617 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |



CONTAMINANTS

| method | limit/base | current | history1 | history2 | |
|-----------|------------|-------------------|--------------|----------|---|
| Silicon | ppm | ASTM D5185(m) >20 | <1 | 1 | 1 |
| Sodium | ppm | ASTM D5185(m) | 4 | 4 | 4 |
| Potassium | ppm | ASTM D5185(m) >20 | <1 | 0 | 0 |

VISUAL

| method | limit/base | current | history1 | history2 | |
|------------------|------------|---------------|--------------|----------|-------|
| White Metal | scalar | Visual* NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* NONE | NONE | NONE | NONE |
| Precipitate | scalar | Visual* NONE | NONE | NONE | NONE |
| Silt | scalar | Visual* NONE | NONE | NONE | NONE |
| Debris | scalar | Visual* NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* NONE | NONE | NONE | NONE |
| Appearance | scalar | Visual* NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* >0.1 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | NEG | NEG | NEG |









OIL ANALYSIS REPORT

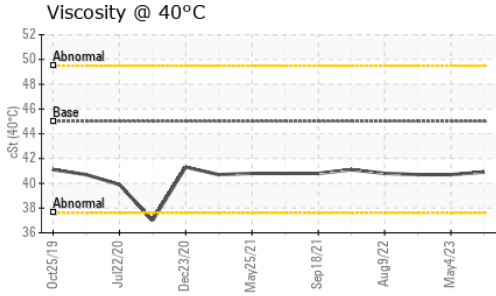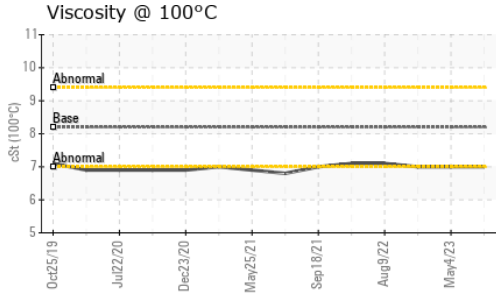

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|----------------------|-------|---------------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 45.0 | 40.9 | 40.7 | 40.7 |
| Visc @ 100°C | cSt | ASTM D7279(m) | 8.2 | 7 | 7 | 7 |
| Viscosity Index (VI) | Scale | ASTM D2270* | 158 | 131 | 132 | 132 |

| SAMPLE IMAGES | | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
| Color | | | | | | |
| Bottom | | | | | | |
| PrtFilter | | | | | | |

GRAPHS

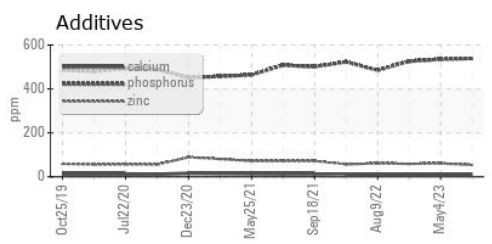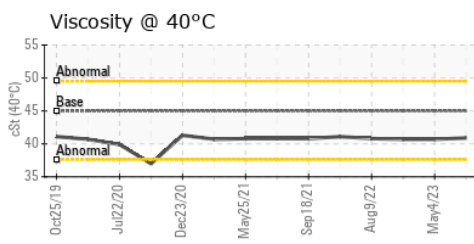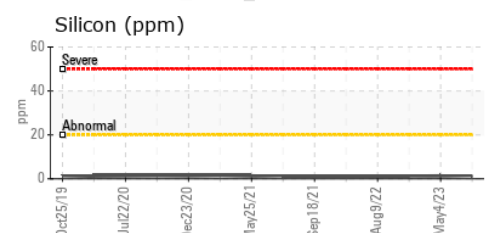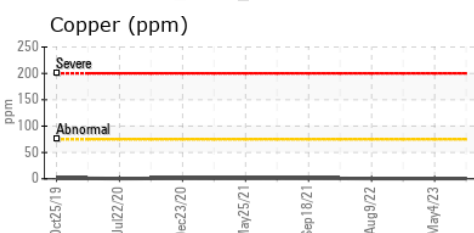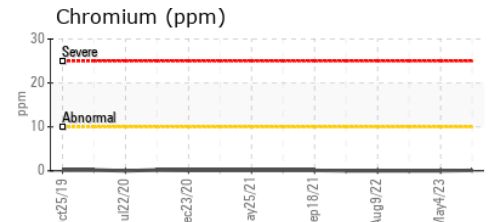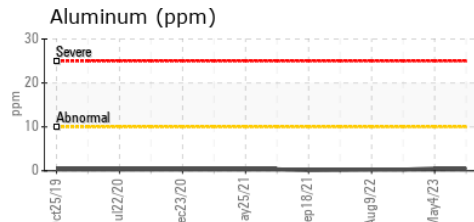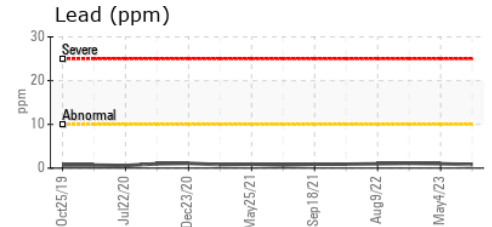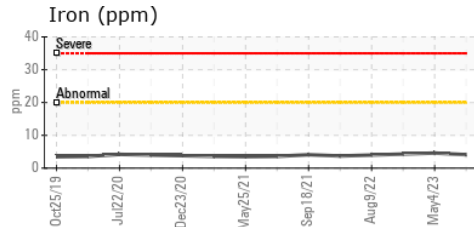

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GIPI) - 286 - Shoring & Foundations
Sample No. : PC0078558 **Received** : 25 Jul 2023 151 Ram Forest Rd, Stouffville, ON CA L4A 2G8
Lab Number : 02571959 **Diagnosed** : 26 Jul 2023 Contact: Shannon Abbott sabbott@gipi.com
Unique Number : 5617010 **Diagnostician** : Kevin Marson T: (905)750-5900
Test Package : MOB 1 (Additional Tests: KV100, VI)
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.