


Machine Id  
**AS130/DR130**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA ENVIRON MV 46 (--- LTR)**

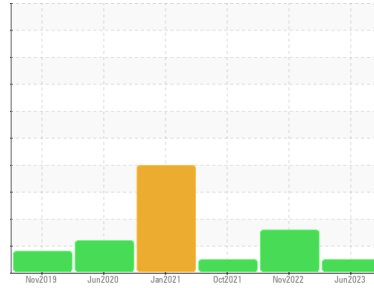

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the component(unconfirmed).

**Fluid Condition**

The condition of the oil is acceptable for the time in service.

**SAMPLE INFORMATION**

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PC0078070</b>	PC0061506	PC0043717
Sample Date	Client Info	<b>30 Jun 2023</b>	15 Nov 2022	13 Oct 2021
Machine Age	hrs	Client Info	0	16478
Oil Age	hrs	Client Info	0	16029
Oil Changed	Client Info	<b>Not Changed</b>	Not Changd	Not Changed
Sample Status		<b>NORMAL</b>	ATTENTION	NORMAL

**WEAR METALS**

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >20	<b>2</b>	2	2
Chromium	ppm	ASTM D5185(m) >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m) >75	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

**ADDITIVES**

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m) 0	<b>1</b>	<1	2
Phosphorus	ppm	ASTM D5185(m) 650	<b>598</b>	593	631
Zinc	ppm	ASTM D5185(m) 0	<b>29</b>	30	36
Sulfur	ppm	ASTM D5185(m) 1420	<b>1366</b>	1404	1437
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1



**CONTAMINANTS**

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	0
Sodium	ppm	ASTM D5185(m)	<b>2</b>	2	1
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1

**VISUAL**

method	limit/base	current	history1	history2	
White Metal	scalar	Visual* NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual* NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual* NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual* NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual* NONE	<b>NONE</b>	VLITE	NONE
Sand/Dirt	scalar	Visual* NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual* NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual* NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual* >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*	<b>NEG</b>	NEG	NEG









# OIL ANALYSIS REPORT

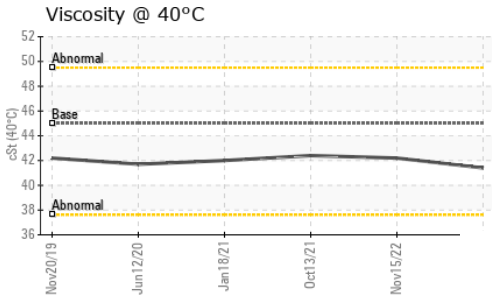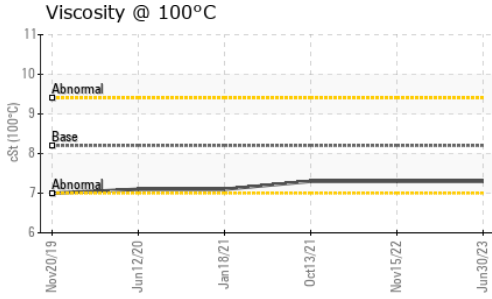

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	45.0	<b>41.4</b>	42.2	42.4
Visc @ 100°C	cSt	ASTM D7279(m)	8.2	<b>7.3</b>	7.3	7.3
Viscosity Index (VI)	Scale	ASTM D2270*	158	<b>141</b>	137	136

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

## GRAPHS

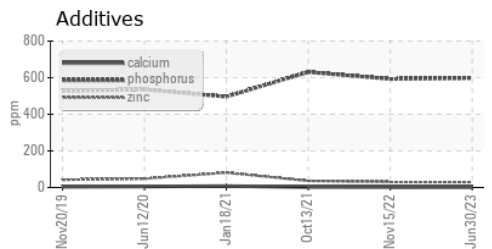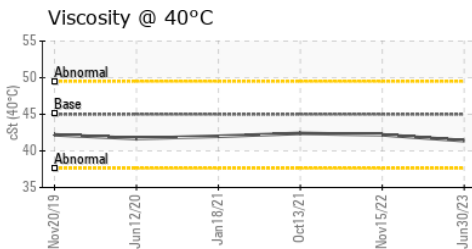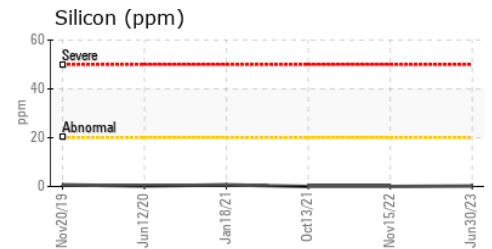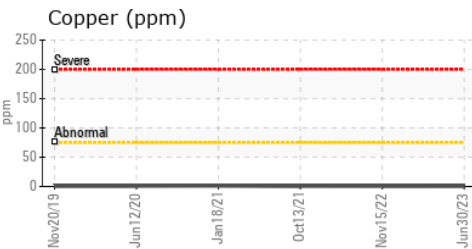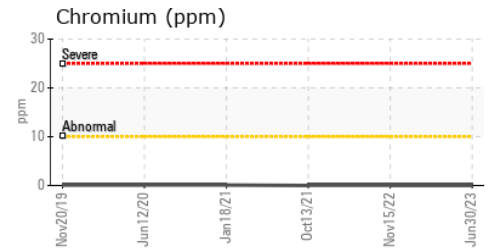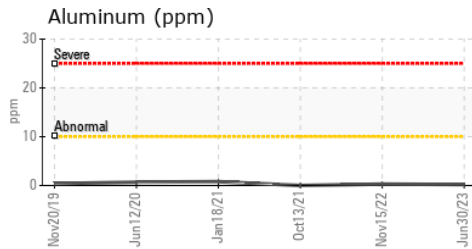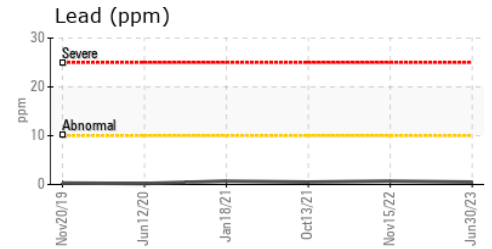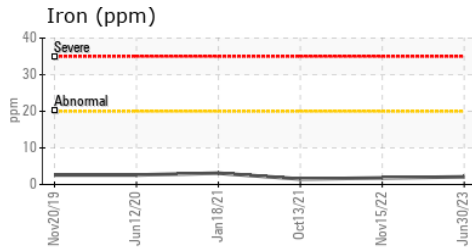

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GIPI) - 286 - Shoring & Foundations  
**Sample No.** : PC0078070 **Received** : 25 Jul 2023 151 Ram Forest Rd,  
**Lab Number** : 02571962 **Diagnosed** : 26 Jul 2023 Stouffville, ON  
**Unique Number** : 5617013 **Diagnostician** : Kevin Marson CA L4A 2G8  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )  
 Contact: Shannon Abbott  
 sabbott@gipi.com  
 T: (905)750-5900  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.