



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
9159
 Component
Transmission (Auto)
 Fluid
PETRO CANADA DURADRIVE HD SYNTHETIC ATF (35 LTR)



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Unit has been off road for a long time. Transferred from a different business department. No info visible in wearcheck regarding history . Unit just had major engine work done.)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0088921	---	---
Sample Date	Client Info		21 Jul 2023	---	---
Machine Age	hrs	Client Info	16850	---	---
Oil Age	hrs	Client Info	16850	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>300	73	---
Chromium	ppm	ASTM D5185(m)	>2	<1	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---
Titanium	ppm	ASTM D5185(m)	>3	0	---
Silver	ppm	ASTM D5185(m)	>5	0	---
Aluminum	ppm	ASTM D5185(m)	>70	29	---
Lead	ppm	ASTM D5185(m)	>85	15	---
Copper	ppm	ASTM D5185(m)	>90	75	---
Tin	ppm	ASTM D5185(m)	>10	7	---
Antimony	ppm	ASTM D5185(m)	>5	0	---
Vanadium	ppm	ASTM D5185(m)		0	---
Beryllium	ppm	ASTM D5185(m)		0	---
Cadmium	ppm	ASTM D5185(m)		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		62	---
Barium	ppm	ASTM D5185(m)		0	---
Molybdenum	ppm	ASTM D5185(m)		<1	---
Manganese	ppm	ASTM D5185(m)		<1	---
Magnesium	ppm	ASTM D5185(m)		1	---
Calcium	ppm	ASTM D5185(m)		104	---
Phosphorus	ppm	ASTM D5185(m)		228	---
Zinc	ppm	ASTM D5185(m)		6	---
Sulfur	ppm	ASTM D5185(m)		1186	---
Lithium	ppm	ASTM D5185(m)		<1	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	7	---
Sodium	ppm	ASTM D5185(m)		5	---
Potassium	ppm	ASTM D5185(m)	>20	1	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---











OIL ANALYSIS REPORT

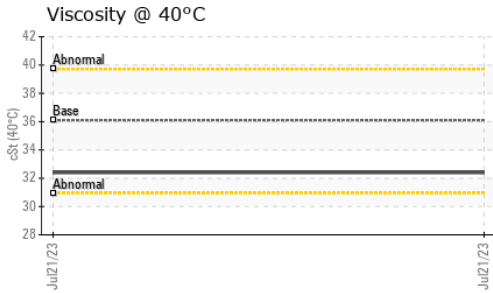

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	36.1	32.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

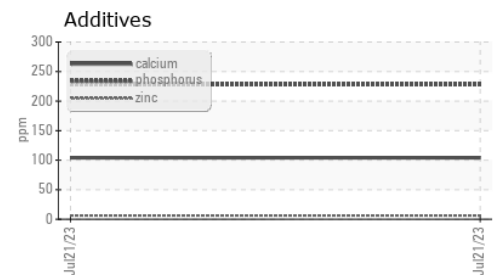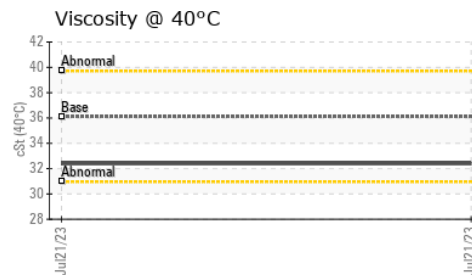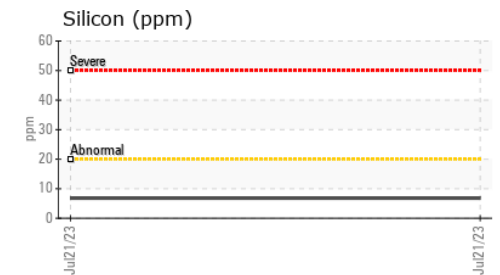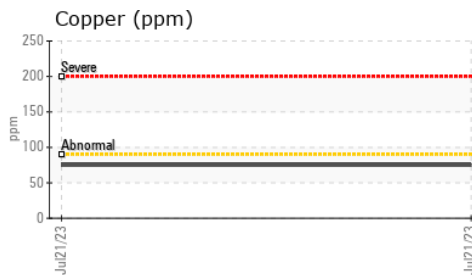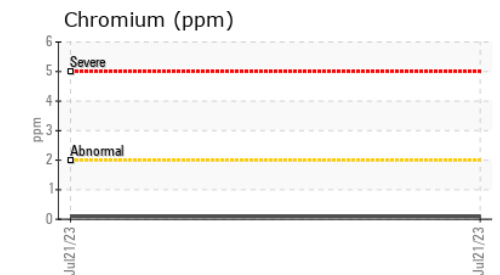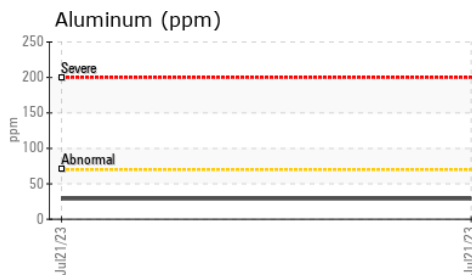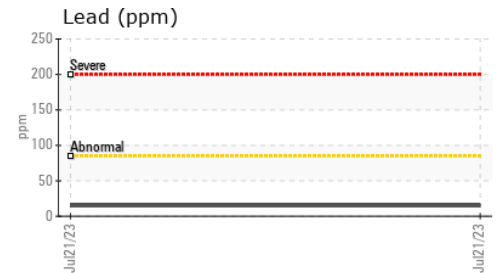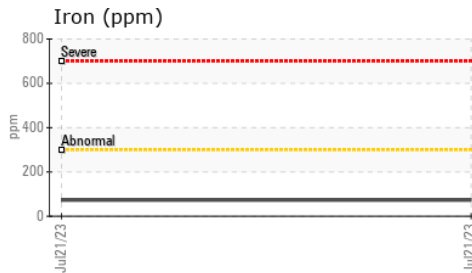

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0088921 **Received** : 25 Jul 2023
Lab Number : 02571970 **Diagnosed** : 26 Jul 2023
Unique Number : 5617021 **Diagnostician** : Kevin Marson
Test Package : MOB 1

GFL Environmental - 216
 15 Bermondsey Road
 Toronto, ON
 CA M4B 0A6
 Contact: Tom Hatzioannidis
 thatzioannidis@gflenv.com
 T: (416)678-9340
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.