




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

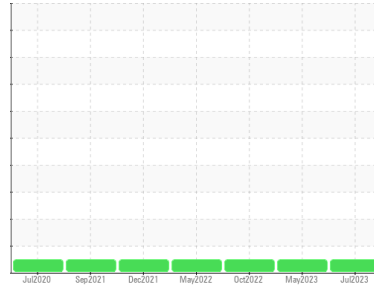

Machine Id  
**OR348**  
Component  
**Front Differential**  
Fluid  
**PETRO CANADA DURATRAN (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0087391</b>	GFL0056461	GFL0056451
Sample Date	Client Info		<b>18 Jul 2023</b>	29 May 2023	28 Oct 2022
Machine Age	hrs	Client Info	<b>22210</b>	21984	21186
Oil Age	hrs	Client Info	<b>2224</b>	2098	1331
Oil Changed	Client Info		<b>Not Changed</b>	Not Changd	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>500	<b>11</b>	16	6
Chromium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>25	<b>3</b>	3	2
Copper	ppm	ASTM D5185(m)	>100	<b>16</b>	14	7
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	110	<b>54</b>	67	78
Barium	ppm	ASTM D5185(m)	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	0.0	<b>2</b>	2	2
Manganese	ppm	ASTM D5185(m)	1	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	13	<b>29</b>	34	38
Calcium	ppm	ASTM D5185(m)	3610	<b>2011</b>	2524	2912
Phosphorus	ppm	ASTM D5185(m)	1192	<b>1018</b>	1100	1089
Zinc	ppm	ASTM D5185(m)	1455	<b>1070</b>	1165	1206
Sulfur	ppm	ASTM D5185(m)	2641	<b>2474</b>	3118	2889
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>75	<b>7</b>	10	6
Sodium	ppm	ASTM D5185(m)		<b>2</b>	3	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	0

## VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG




# OIL ANALYSIS REPORT








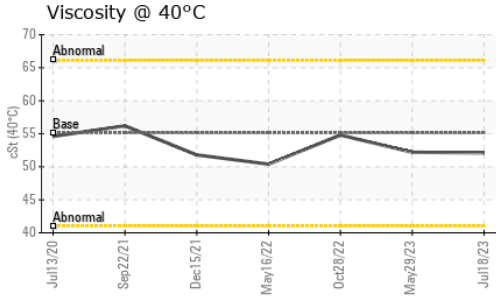


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	55.14	<b>52.1</b>	52.2	54.8

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

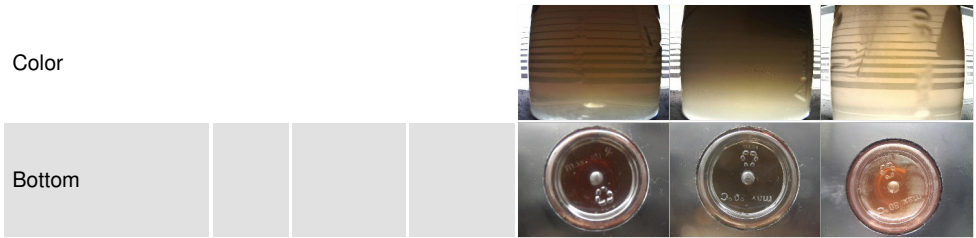

## GRAPHS

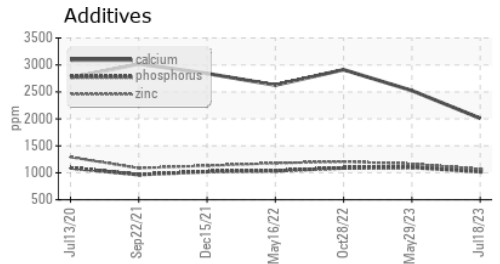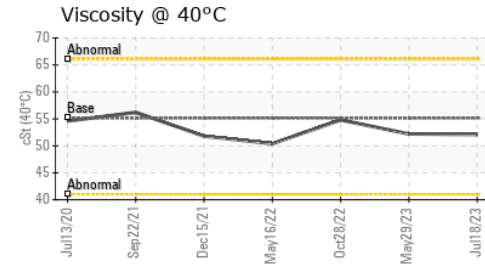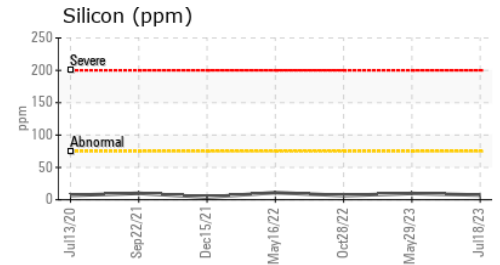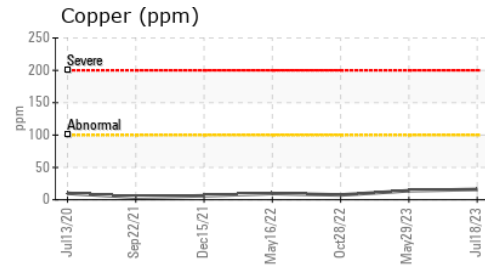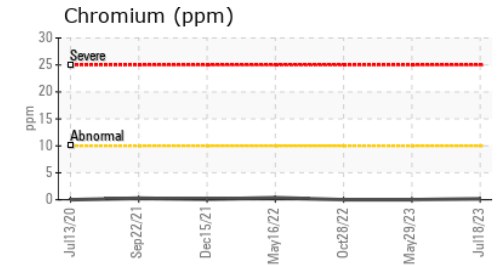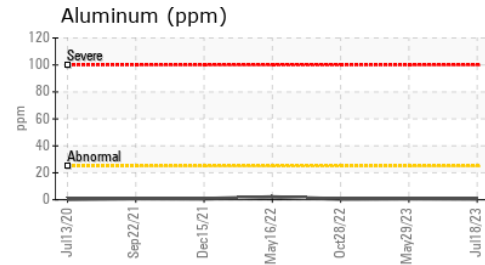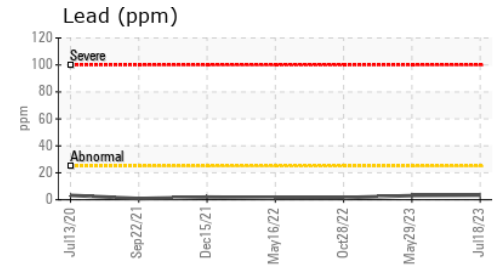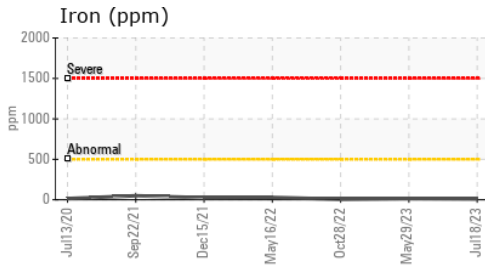

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 720 - Lafleche - Landfill  
**Sample No.** : GFL0087391 **Received** : 25 Jul 2023  
**Lab Number** : 02572022 **Diagnosed** : 25 Jul 2023  
**Unique Number** : 5617073 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

17125 Lafleche Road,  
 Moose Creek, ON  
 CA K0C 1W0  
 Contact: Charles Bergeron  
 cbergeron@gflenv.com  
 T: (613)538-4853  
 F: