




OIL ANALYSIS REPORT

Sample Rating Trend

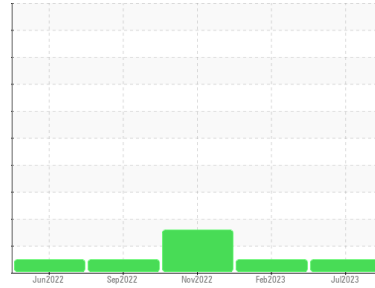

NORMAL



Machine Id
426009
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0088929	GFL0061067	GFL0061087
Sample Date	Client Info		25 Jul 2023	08 Feb 2023	22 Nov 2022
Machine Age	hrs	Client Info	18021	16876	16361
Oil Age	hrs	Client Info	577	515	576
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	0.3
Glycol	WC Method		NEG	NEG	0.0

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	7	5	16
Chromium	ppm	ASTM D5185(m) >20	0	0	1
Nickel	ppm	ASTM D5185(m) >5	0	0	<1
Titanium	ppm	ASTM D5185(m) >2	0	<1	<1
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >20	2	2	3
Lead	ppm	ASTM D5185(m) >40	<1	<1	<1
Copper	ppm	ASTM D5185(m) >330	<1	<1	4
Tin	ppm	ASTM D5185(m) >15	<1	1	<1
Antimony	ppm	ASTM D5185(m)	0	<1	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	4	4	28
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	58	58	59
Manganese	ppm	ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	970	967	696
Calcium	ppm	ASTM D5185(m) 1070	1027	1078	1660
Phosphorus	ppm	ASTM D5185(m) 1150	1013	1060	969
Zinc	ppm	ASTM D5185(m) 1270	1169	1191	1034
Sulfur	ppm	ASTM D5185(m) 2060	2319	2593	2199
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	3	2	16
Sodium	ppm	ASTM D5185(m)	3	3	6
Potassium	ppm	ASTM D5185(m) >20	<1	<1	<1

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0.2	0	0
Nitration	Abs/cm	ASTM D7624* >20	8.0	8.2	7.1
Sulfation	Abs/.1mm	ASTM D7415* >30	20.1	20.4	15.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	15.8	15.7	11.1











OIL ANALYSIS REPORT

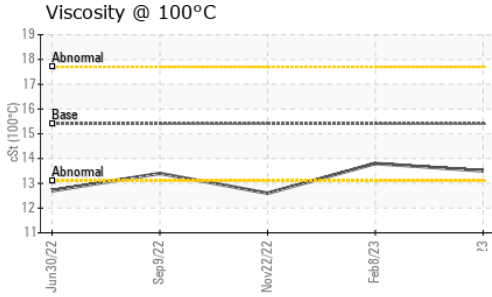

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG ▲ .2%
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.8	12.6

GRAPHS

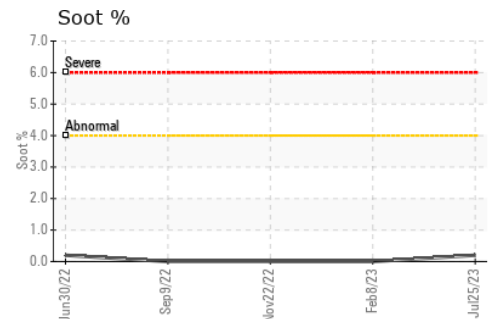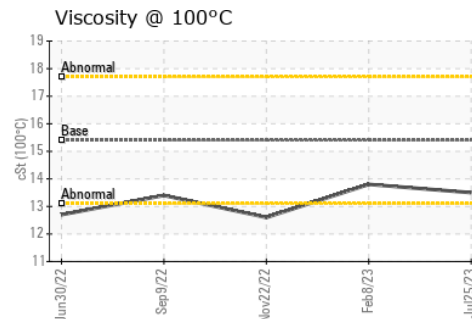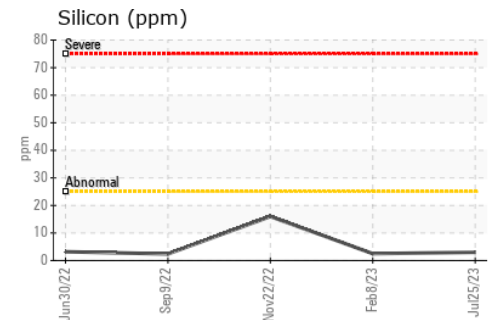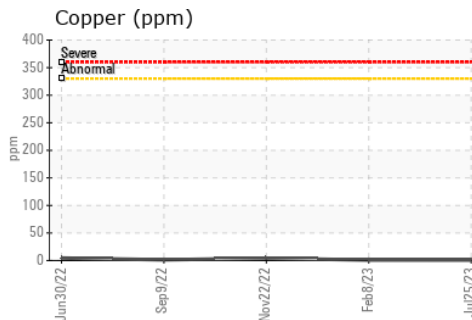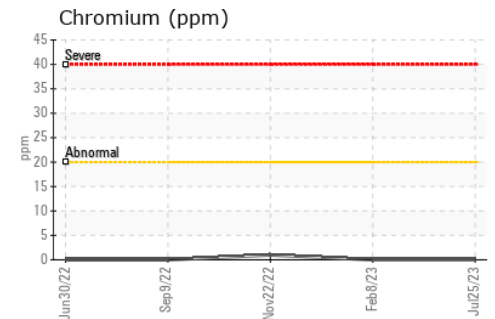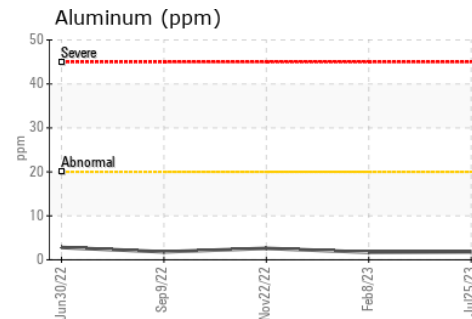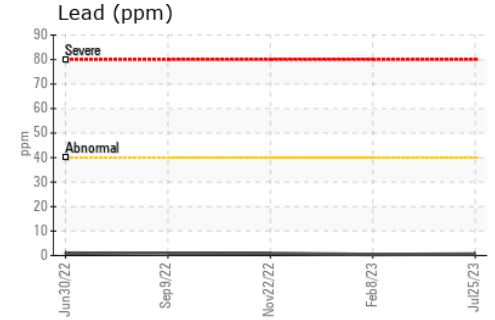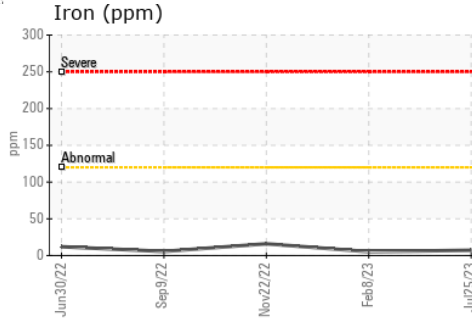

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0088929 **Received** : 26 Jul 2023
Lab Number : 02572224 **Diagnosed** : 26 Jul 2023
Unique Number : 5617275 **Diagnostician** : Wes Davis
Test Package : MOB 1

GFL Environmental - 216
 15 Bermondsey Road
 Toronto, ON
 CA M4B 0A6
 Contact: Tom Hatzioannidis
 thatzioannidis@gflenv.com
 T: (416)678-9340
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.