




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

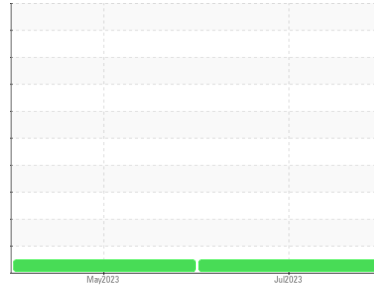

Machine Id
713073

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux de métaux sont typiques pour la période de rodage d'un nouveau composant.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Il n'y a aucun indice de contamination dans l'huile.

Fluid Condition

L'état de l'huile est acceptable pour la durée de service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0084419	GFL0062044	---
Sample Date	Client Info	12 Jul 2023	04 May 2023	---
Machine Age	hrs	989	588	---
Oil Age	hrs	600	600	---
Oil Changed	Client Info	Changed	Changed	---
Sample Status		NORMAL	NORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2	
Fuel	WC Method	>5	<1.0	0.6	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185(m)	>100	17	34	---
Chromium	ppm	ASTM D5185(m)	>20	<1	1	---
Nickel	ppm	ASTM D5185(m)	>4	<1	1	---
Titanium	ppm	ASTM D5185(m)		0	<1	---
Silver	ppm	ASTM D5185(m)	>3	<1	<1	---
Aluminum	ppm	ASTM D5185(m)	>20	4	4	---
Lead	ppm	ASTM D5185(m)	>40	8	3	---
Copper	ppm	ASTM D5185(m)	>330	351	142	---
Tin	ppm	ASTM D5185(m)	>15	1	3	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)	250	8	50	---
Barium	ppm	ASTM D5185(m)	10	0	<1	---
Molybdenum	ppm	ASTM D5185(m)	100	57	41	---
Manganese	ppm	ASTM D5185(m)		1	4	---
Magnesium	ppm	ASTM D5185(m)	450	907	502	---
Calcium	ppm	ASTM D5185(m)	3000	1142	1727	---
Phosphorus	ppm	ASTM D5185(m)	1150	1016	773	---
Zinc	ppm	ASTM D5185(m)	1350	1138	841	---
Sulfur	ppm	ASTM D5185(m)	4250	2217	1892	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)	>25	4	6	---
Sodium	ppm	ASTM D5185(m)		2	5	---
Potassium	ppm	ASTM D5185(m)	>20	13	11	---

INFRA-RED


method	limit/base	current	history1	history2		
Soot %	%	ASTM D7844*	>3	0.2	0.2	---
Nitration	Abs/cm	ASTM D7624*	>20	7.4	8.1	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.0	23.7	---

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.3	21.7	---











OIL ANALYSIS REPORT

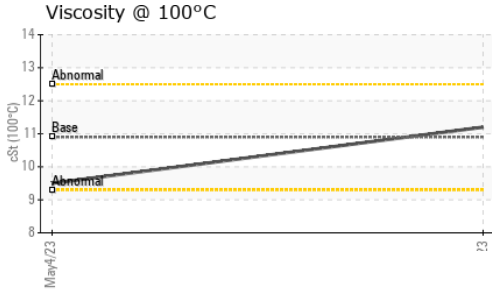

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.2	9.5

GRAPHS

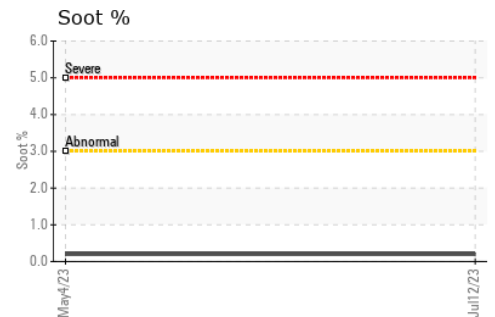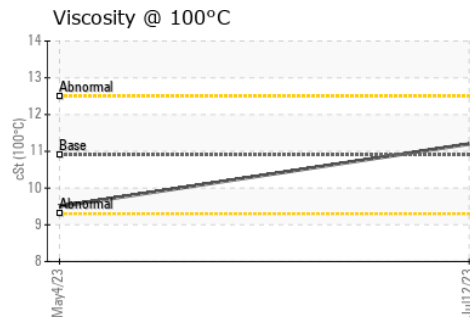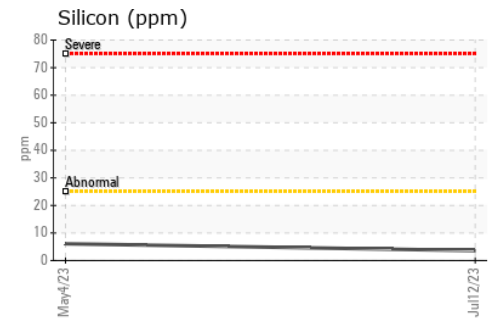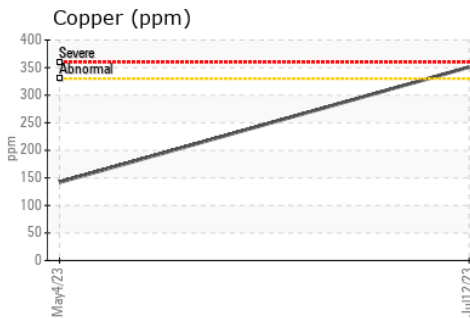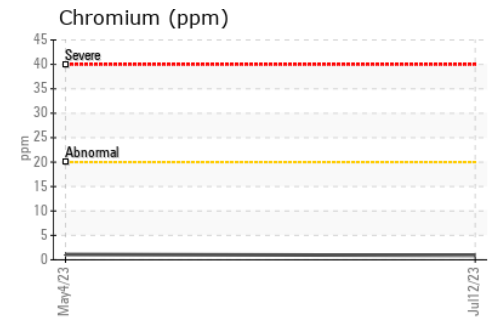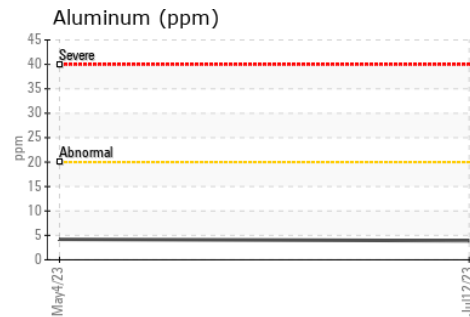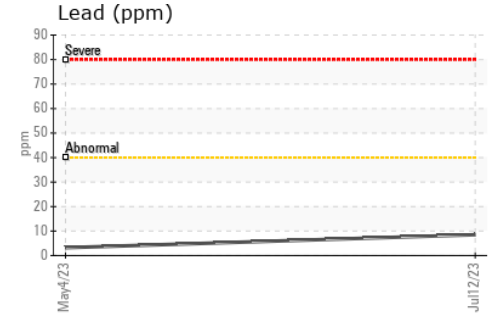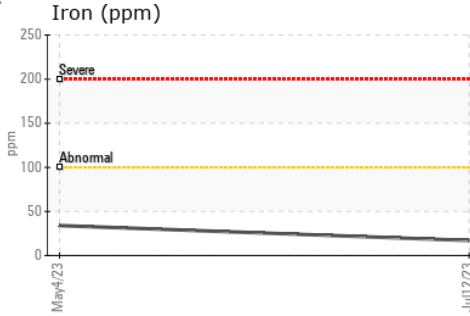

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 780 - GMA - ICI - Solid Waste
Sample No. : GFL0084419 **Received** : 28 Jul 2023 4365 boul. St-Elzear Ouest, Laval, QC
Lab Number : 02572881 **Diagnosed** : 28 Jul 2023 CA H7P 4J3
Unique Number : 5617932 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

Contact: Louis Michaud
louis.michaud@gflenv.com

T:
F: