



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**833084**  
Component  
**Transmission**  
Fluid  
**NOT GIVEN (--- GAL)**



## DIAGNOSIS

### Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqua que ce fluide est du Mineral ATF. Veuillez confirmer la viscosité de l'huile et veuillez préciser la marque de votre prochain échantillon.

### Wear

Les taux d'usure de tous les composants sont normaux.

### Contamination

Il n'y a aucun indice de contamination dans le fluide.

### Fluid Condition

L'état de le fluide est acceptable pour la durée de service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0084456</b>	---	---
Sample Date	Client Info		<b>27 Jul 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >200	<b>42</b>	---	---
Chromium	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >50	<b>12</b>	---	---
Lead	ppm	ASTM D5185(m) >50	<b>1</b>	---	---
Copper	ppm	ASTM D5185(m) >200	<b>4</b>	---	---
Tin	ppm	ASTM D5185(m) >10	<b>2</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>78</b>	---	---
Barium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<b>1</b>	---	---
Calcium	ppm	ASTM D5185(m)	<b>76</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	<b>275</b>	---	---
Zinc	ppm	ASTM D5185(m)	<b>8</b>	---	---
Sulfur	ppm	ASTM D5185(m)	<b>1100</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	<b>8</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>8</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>14</b>	---	---
Glycol	%	ASTM D7922*	<b>0.0</b>	---	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	---
Free Water	scalar	Visual*		<b>NEG</b>	---



# OIL ANALYSIS REPORT






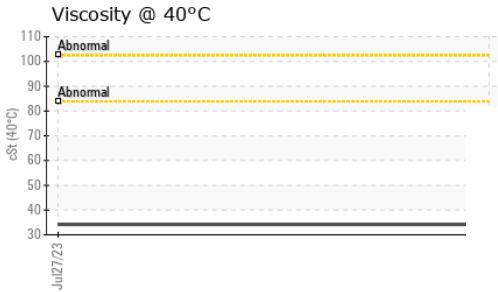
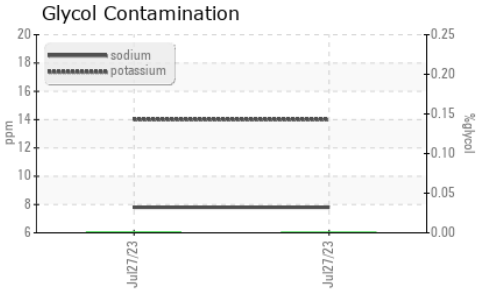


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	34.2	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

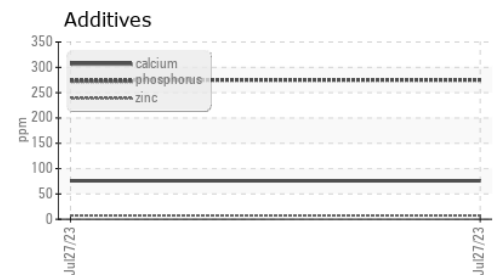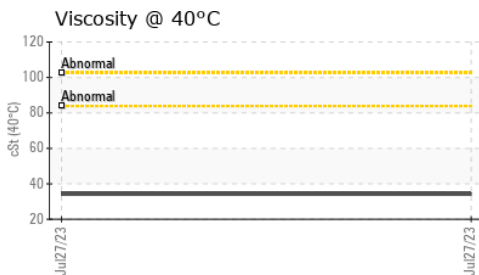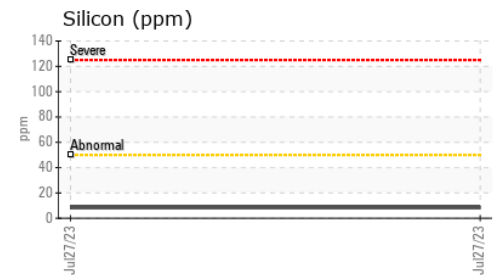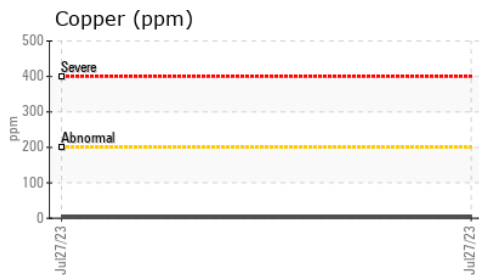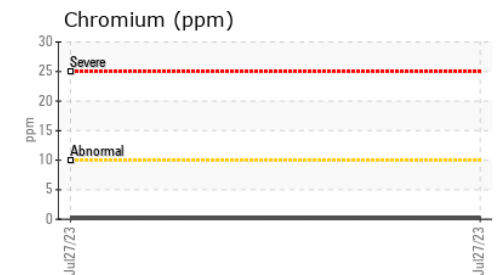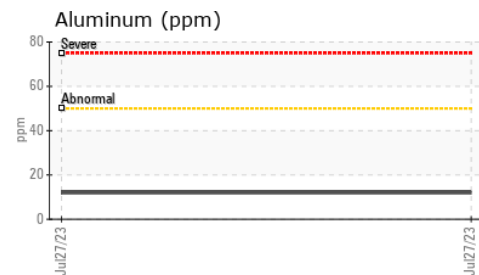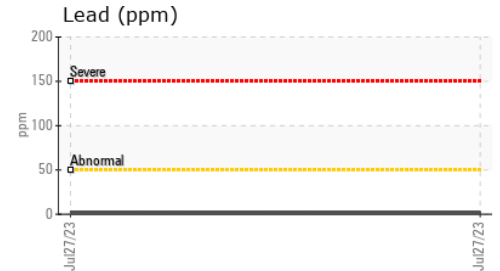

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 780 - GMA - ICI - Solid Waste  
**Sample No.** : GFL0084456      **Received** : 28 Jul 2023      4365 boul. St-Elzear Ouest, Laval, QC  
**Lab Number** : 02573016      **Diagnosed** : 01 Aug 2023      CA H7P 4J3  
**Unique Number** : 5618067      **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: Glycol )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Steve Voyer  
 svoyer@matrec.ca  
 T: (450)641-3070  
 F: (450)441-2056