




OIL ANALYSIS REPORT

Sample Rating Trend

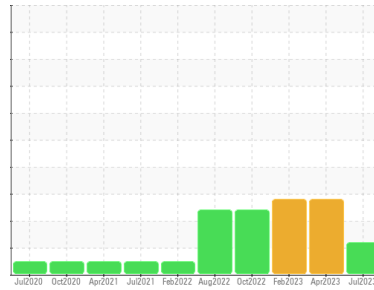

FUEL



Machine Id
426013
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition. The fluid was specified as PETRO CANADA DURON SHP 15W40, however, a fluid match indicates that this fluid is SAE 30 Diesel Engine Oil. Please confirm the oil type and grade on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0078509	GFL0078516	GFL0071306
Sample Date	Client Info	26 Jul 2023	20 Apr 2023	21 Feb 2023
Machine Age	hrs	0	16360	15435
Oil Age	hrs	16904	0	584
Oil Changed	Client Info	Changed	Changed	N/A
Sample Status		ABNORMAL	ABNORMAL	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >120	9	6	12
Chromium	ppm	ASTM D5185(m) >20	<1	0	0
Nickel	ppm	ASTM D5185(m) >5	0	0	<1
Titanium	ppm	ASTM D5185(m) >2	<1	<1	<1
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >20	2	2	3
Lead	ppm	ASTM D5185(m) >40	2	<1	<1
Copper	ppm	ASTM D5185(m) >330	<1	<1	2
Tin	ppm	ASTM D5185(m) >15	<1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	<1	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 0	25	▲ 35	12
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	44	41	39
Manganese	ppm	ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	534	▲ 517	587
Calcium	ppm	ASTM D5185(m) 1070	1734	▲ 1702	1233
Phosphorus	ppm	ASTM D5185(m) 1150	842	822	827
Zinc	ppm	ASTM D5185(m) 1270	923	▲ 872	910
Sulfur	ppm	ASTM D5185(m) 2060	2175	2274	2115
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >25	5	4	4
Sodium	ppm	ASTM D5185(m)	4	3	3
Potassium	ppm	ASTM D5185(m) >20	<1	0	2
Fuel	%	ASTM D7593* >3.0	▲ 4.5	▲ 3.8	🔴 15.8

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844* >4	0.3	0	0.1
Nitration	Abs/cm	ASTM D7624* >20	9.5	7.8	8.9
Sulfation	Abs/.1mm	ASTM D7415* >30	22.6	21.2	21.2

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414* >25	21.3	19.5	16.1











OIL ANALYSIS REPORT

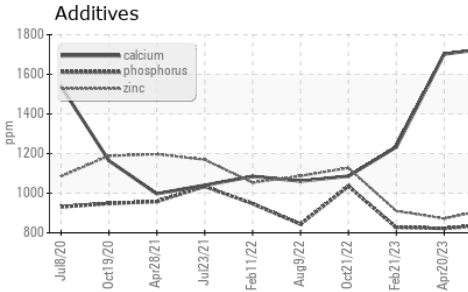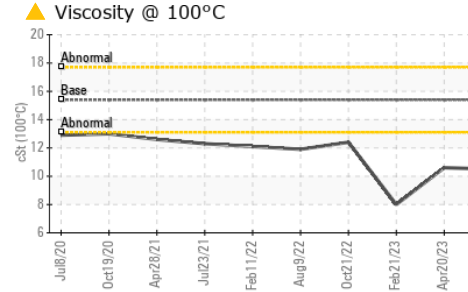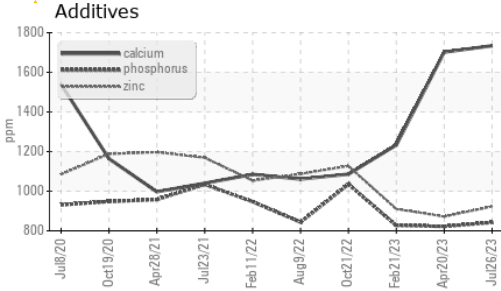

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 10.5	▲ 10.6

GRAPHS

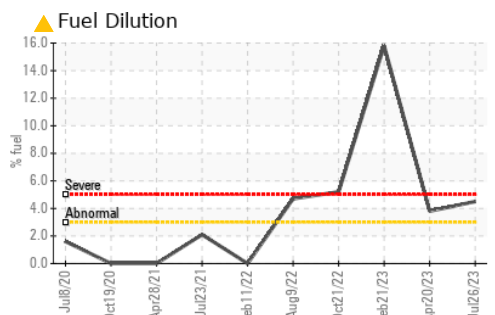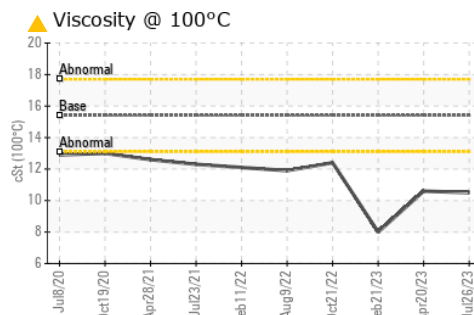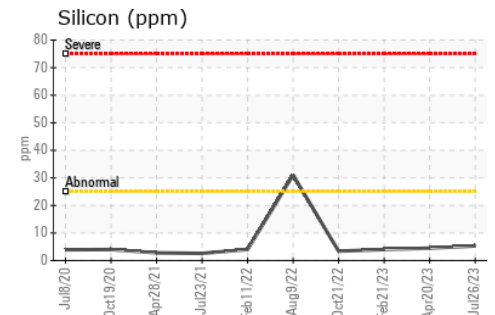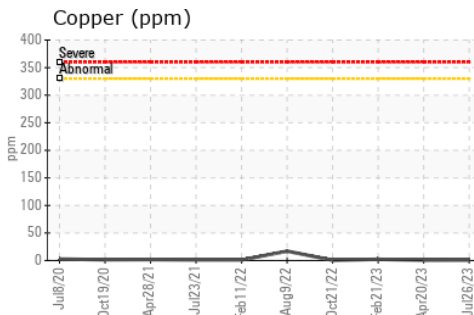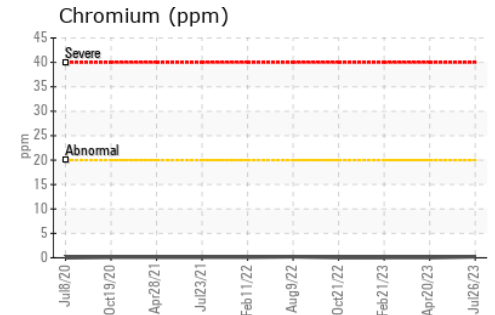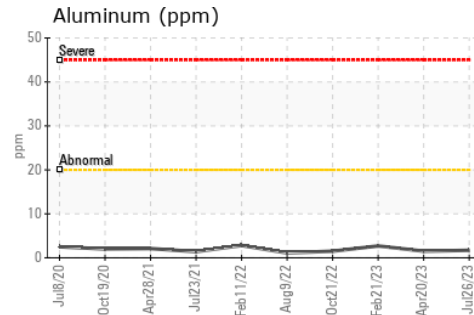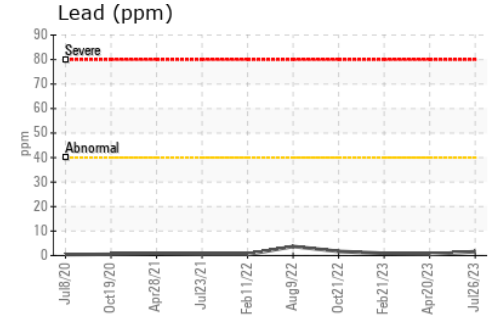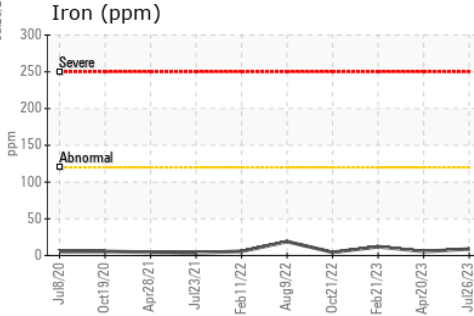

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 246 - Windsor**
Sample No. : GFL0078509 **Received** : 01 Aug 2023
Lab Number : 02573340 **Diagnosed** : 02 Aug 2023
Unique Number : 5618391 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: FUELDILUTION, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Dave Varga
 dvarga@gflenv.com
 T: (519)944-8009
 F: